


Range 36"

CPF36UGMX
Stainless steel
Dual-Fuel

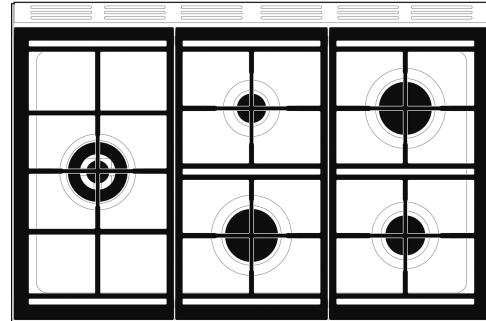

Cooktop technical features

| | |
|---|-----|
| Cooking zones | 5 |
| Left - Gas - Dual ultra-rapid - 20000 BTU | |
| Rear-center - Gas - AUX - 4500 BTU | |
| Front-center - Gas - Rapid - 10500 BTU | |
| Rear-right - Gas - Rapid - 12000 BTU | |
| Front-right - Gas - Semi-rapid - 8000 BTU | |
| Automatic gas ignition | Yes |
| Gas safety valves | Yes |

Aesthetic

| | |
|-------|-----------------|
| Color | Stainless steel |
|-------|-----------------|

General information

| | |
|------------|-----------|
| Range size | 36" |
| Range type | Dual-Fuel |

Programs / Functions

| | |
|--------------------------|------------|
| Cleaning functions | VaporClean |
| No. of cooking functions | 10 |

Main oven options

| | |
|---------------------|--------|
| Minimum Temperature | 120 °F |
| Maximum temperature | 500 °F |

Main Oven Technical Features

| | |
|---------------------------|------------------|
| Volume | 4.45 cu. ft. |
| Cavity material | EverClean enamel |
| No. of shelves | 5 |
| Removable inner door | Yes |
| Total no. of door glasses | 3 |
| Soft Close system | Yes |

Compact- design range with electric oven and gas cooktop: efficient and responsive, the visible heat source allows total control and choice of the right intensity.

Features

Touch control - Easy and intuitive timer setting with a single touch

Tangential cooling - New cooling system with tangential fan and airflow from the door to the splashback

True-convection - The best cooking performances guaranteed by ventilated circular flow.

Gas hob - Gas provides permanent control of the heat source and the temperature change is immediate

Included accessories


Electrical Connection

| | |
|-----------------|-----------|
| Circuit breaker | 20 A |
| Voltage | 240/208 V |
| Frequency | 60 Hz |


Logistic Information

| | |
|------------|----------|
| Width | 35 7/8 " |
| Depth | 25 " |
| Height | 36 " |
| Net weight | 230 lbs |

Product dimension drawing

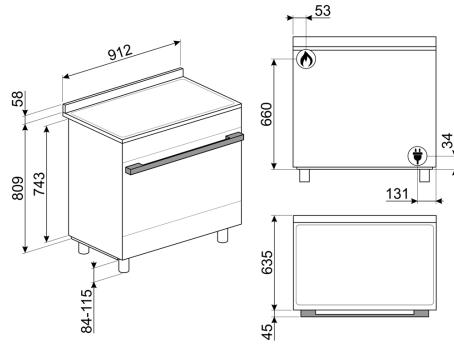

Product installation drawing

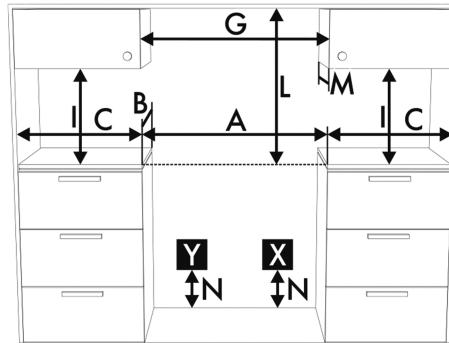

| | | |
|-----------------------|---------|---------------------|
| A | 1220 mm | 48 $\frac{1}{16}$ " |
| B | 636 mm | 25" |
| C ¹ | 216 mm | 8 $\frac{1}{2}$ " |
| G ² | 1220 mm | 48 $\frac{1}{16}$ " |
| I ³ | 457 mm | 18" |
| L ⁴ | 610 mm | 24" |
| M ⁵ | 330 mm | 13" |
| N | 178 mm | 7" |

Accessories



GT3T

Total-extraction
telescopic guides



PALPZ

Pizza shovel with
fold away handle