


Professional Range 36"

SPR36UGMX  
Stainless steel  
SPR

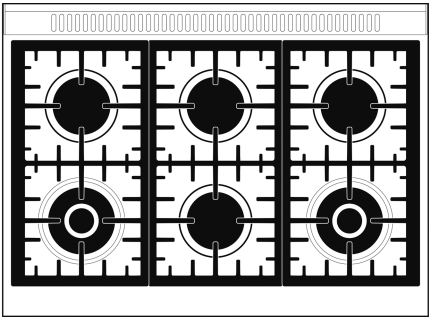

Cooktop technical features

Cooking zones	6
Front-left - 18000 BTU	
Rear-left - 10000 BTU	
Front-center - 10000 BTU	
Rear-center - 10000 BTU	
Front-right - 18000 BTU	
Rear-right - 10000 BTU	

Programs / Functions

No. of cooking functions	8
Cleaning functions	VaporClean

Main oven options

Minimum Temperature	149 °F
Maximum temperature	500 °F

Main Oven Technical Features

Volume	4.45 cu. ft.
Cavity material	EverClean enamel
No. of shelves	5
Removable inner door	Yes
Total no. of door glasses	3
Soft Close system	Yes

Included accessories

Oven wire rack	2
----------------	---

Electrical Connection

Plug	(B) NEMA 14-50P
Circuit breaker	20 A
Voltage	208/240 V
Frequency	60 Hz


Features

- Gas hob** - Gas provides permanent control of the heat source and the temperature change is immediate
- Touch control** - Easy and intuitive timer setting with a single touch
- True-convection** - The best cooking performances guaranteed by ventilated circular flow.
- Tangential cooling** - New cooling system with tangential fan and airflow from the door to the splashback
- Soft close** - The door is equipped with a specific system for silent closing


Logistic Information

Width	35 7/8 "
Depth	25 "
Height	35 3/16 "
Net weight	238 lbs

Product dimension drawing

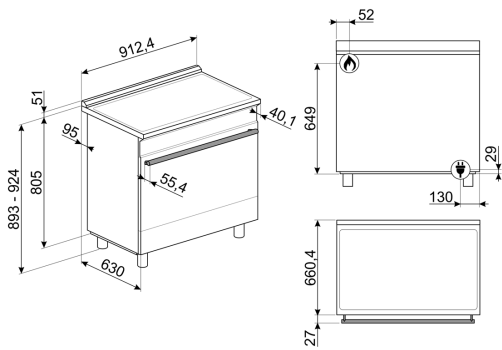

Product installation drawing

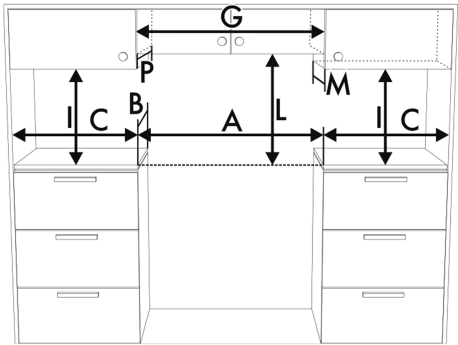

A	24"	610 mm
B	25"	630 mm
C <sup>1</sup>	5 7/8"	150 mm
G <sup>2</sup>	24"	610 mm
I <sup>3</sup>	18"	457 mm
L	see user manual	
M <sup>4</sup>	13"	330 mm
P <sup>4</sup>	13"	330 mm


Accessories



GRM  
Coffee machine support



GT3T  
Total-extraction telescopic guides



KITTKSPR36  
Plinth, 3 sides, 900mm , SPR cookers 30", black