


Professional Range 36"

SPR36UGMX
Stainless steel
Dual-Fuel

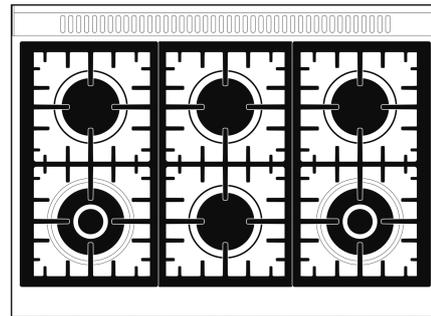

Cooktop technical features

| | |
|---------------|-----------|
| Cooking zones | 6 |
| Front-left | 18000 BTU |
| Rear-left | 10000 BTU |
| Front-center | 10000 BTU |
| Rear-center | 10000 BTU |
| Front-right | 18000 BTU |
| Rear-right | 10000 BTU |

Aesthetic

| | |
|--------|-----------------|
| Series | Professional |
| Color | Stainless steel |

General information

| | |
|------------|-----------|
| Range size | 36" |
| Range type | Dual-Fuel |

Features

- Touch control** - Easy and intuitive timer setting with a single touch
- Tangential cooling** - New cooling system with tangential fan and airflow from the door to the splashback
- True-convection** - The best cooking performances guaranteed by ventilated circular flow.
- Gas hob** - Gas provides permanent control of the heat source and the temperature change is immediate

Programs / Functions

| | |
|--------------------------|------------|
| Cleaning functions | VaporClean |
| No. of cooking functions | 8 |

Main oven options

| | |
|---------------------|--------|
| Minimum Temperature | 149 °F |
| Maximum temperature | 500 °F |

Main Oven Technical Features

| | |
|---------------------------|------------------|
| Volume | 4.45 cu. ft. |
| Cavity material | EverClean enamel |
| No. of shelves | 5 |
| Removable inner door | Yes |
| Total no. of door glasses | 3 |
| Soft Close system | Yes |

Included accessories

Oven wire rack 2


Electrical Connection

Circuit breaker 20 A
 Voltage 208/240 V
 Frequency 60 Hz


Logistic Information

Width 35 7/8 "
 Depth 26 "
 Height 35 3/16 "
 Net weight 238 lbs

Product dimension drawing

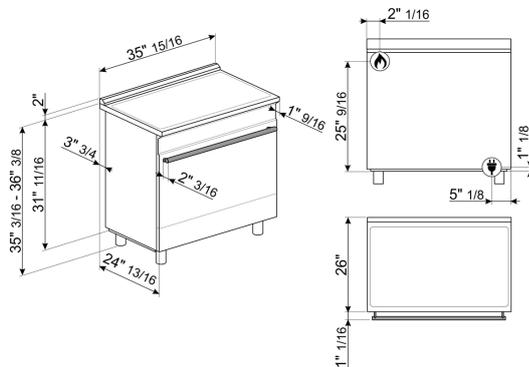

Product installation drawing

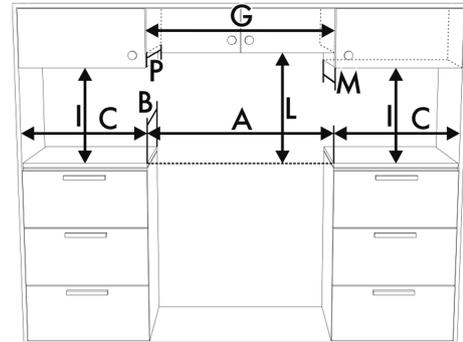

| | | |
|----------------|-----------------|--------|
| A | 24" | 610 mm |
| B | 25" | 630 mm |
| C ¹ | 5 7/8" | 150 mm |
| G ² | 24" | 610 mm |
| I ³ | 18" | 457 mm |
| L | see user manual | |
| M ⁴ | 13" | 330 mm |
| P ⁴ | 13" | 330 mm |

Accessories



GRM
 Coffee machine support



GT3T
 Total-extraction telescopic guides



KITTKSPR36
 Plinth, 3 sides, 900mm, SPR cookers 30", black



WOKGHU
 Cast-iron wok support