


Professional Range 36"

SPR36UGMX
Stainless steel
Dual-Fuel

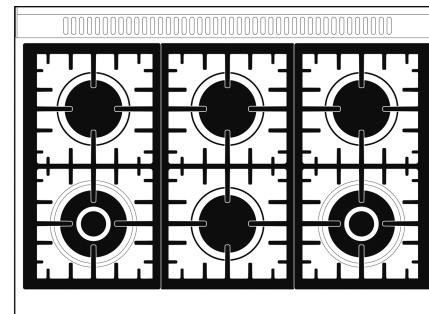

Cooktop technical features

| | |
|--------------------------|---|
| Cooking zones | 6 |
| Front-left - 18000 BTU | |
| Rear-left - 10000 BTU | |
| Front-center - 10000 BTU | |
| Rear-center - 10000 BTU | |
| Front-right - 18000 BTU | |
| Rear-right - 10000 BTU | |

Aesthetic

| | |
|------------|-----------------|
| Aesthetics | SPR |
| Color | Stainless steel |
| Color | Stainless steel |
| Series | Professional |

General information

| | |
|------------|-----------|
| Range size | 36" |
| Range type | Dual-Fuel |

Programs / Functions

| | |
|--------------------------|------------|
| No. of cooking functions | 8 |
| Cleaning functions | VaporClean |

Main oven options

| | |
|---------------------|--------|
| Minimum Temperature | 149 °F |
| Maximum temperature | 500 °F |

Main Oven Technical Features

| | |
|---------------------------|------------------|
| Volume | 4.45 cu. ft. |
| Cavity material | EverClean enamel |
| No. of shelves | 5 |
| Removable inner door | Yes |
| Total no. of door glasses | 3 |
| Soft Close system | Yes |

Included accessories

| | |
|----------------|---|
| Oven wire rack | 2 |
|----------------|---|


Electrical Connection

| | |
|-----------------|-----------|
| Circuit breaker | 20 A |
| Voltage | 208/240 V |
| Frequency | 60 Hz |

Logistic Information

| | |
|------------|-----------|
| Width | 35 7/8 " |
| Depth | 26 " |
| Height | 35 3/16 " |
| Net weight | 238 lbs |

Product dimension drawing

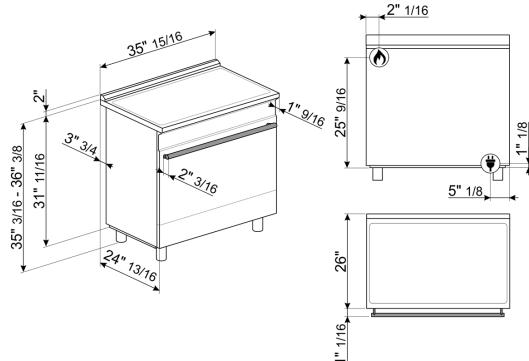


Accessories



GRM



GT3T




KITTKSPR36



WOKGHU

Cast-iron wok support

Product installation drawing

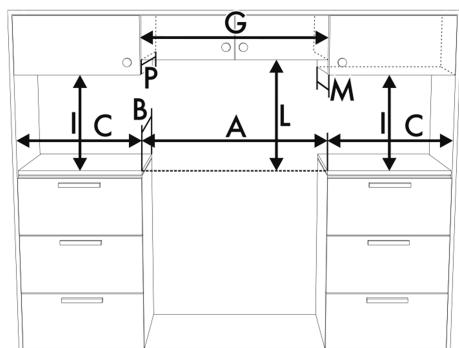

| | | |
|-----------------------|-----------------|--------|
| A | 24" | 610 mm |
| B | 25" | 630 mm |
| C ¹ | 5 7/8" | 150 mm |
| G ² | 24" | 610 mm |
| I ³ | 18" | 457 mm |
| L | see user manual | |
| M ⁴ | 13" | 330 mm |
| P ⁴ | 13" | 330 mm |