


# ALFA1035H-2



<b>Family</b>	Professional ovens
<b>Subfamily</b>	Convection oven 10 trays EN 600x400 mm or GN1/1
<b>Power supply</b>	Electric
<b>Oven type</b>	Convection oven with humidification
<b>Oven control</b>	Manual
<b>Trays capacity</b>	10 trays EN 600x400 mm, 10 trays GN1/1 (min. H 20 mm)
<b>Power supply</b>	400 V 3N~ / 23A / 16 kW / 50 Hz
<b>Program storage with application</b>	Not available
<b>Humidity generation</b>	Direct in cavity
<b>Adjustable feet</b>	Yes
<b>Product dimensions WxDxH</b>	798x772x1100 mm
<b>Maximum depth with open door</b>	1536 mm

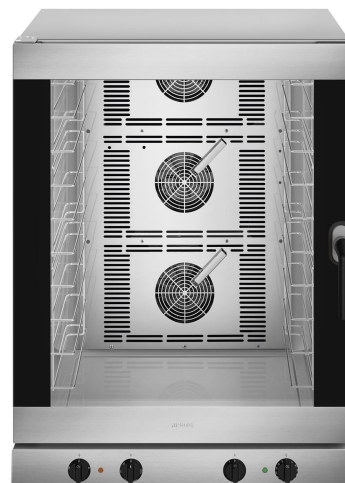

## Target

<b>Solutions</b>	Bakery/Pastry making; Frozen bakery industry; Food retail	<b>Suggested for</b>	Bakery
------------------	---	----------------------	--------

## Aesthetics

<b>Series</b>	Alfa	<b>Front panel</b>	Yes
<b>Colour</b>	Stainless steel	<b>Logo</b>	Smeg printed
<b>Door with stainless steel stripes</b>	Yes		

## Controls

<b>Timer setting range</b>	1-60 minutes + endless	<b>Chimney regulation</b>	Manual
----------------------------	------------------------	---------------------------	--------

## Options

<b>Right hand hinge</b>	ALFA1035HR-2	<b>Combinable hood</b>	K4610X
<b>Right hand hinge</b>	Yes		


## Construction

<b>Oven materials</b>	Stainless steel / glass / plastics	<b>Humidification levels</b>	1 Manual
		<b>Exhaust position</b>	Back

<b>Cavity dimensions (WxDxH)</b>	672x437x854 mm	<b>Timer type</b>	Electric
<b>Gross volume</b>	289,8 lt	<b>Temperature range</b>	50-270°C
<b>Net volume</b>	258,9 lt	<b>End cooking signal</b>	Yes
<b>Internal net volume</b>	199,1 lt	<b>Orange light indicator for t° achievement</b>	Yes
<b>Cavity material</b>	Stainless steel	<b>Green light indicator time achievement</b>	Yes
<b>Shelves number</b>	10	<b>Safety switch with open door</b>	Yes
<b>Tray frame support</b>	Chromed wire	<b>Manual reset safety thermostat</b>	Yes
<b>Shelves distance</b>	77 mm GN1/1 - EN 600X400	<b>Removable deflector</b>	Yes
<b>Door construction</b>	Double glass	<b>Lighting</b>	3 Halogen lamps
<b>Door opening</b>	Lateral - left hinge	<b>Light power</b>	40 W
<b>Handle type</b>	Rotating	<b>Water load pipe</b>	Yes
<b>Glass</b>	Openable with hinge	<b>Water inlet pressure</b>	50-500 kPa (min-max)
<b>Fan type and number</b>	3 contrarotating with timed direction reversal	<b>Power cable length</b>	170 cm
<b>Fan motor power</b>	180W	<b>Back panel</b>	Galvanized
<b>Engine rpm</b>	Single speed	<b>IPX protection</b>	IPX3
<b>Motor rpm in standard speed</b>	2850 rpm		
<b>Water injection on each fan</b>	Yes		

## Logistic Information

<b>Net weight</b>	102,000 kg	<b>Height (mm) packed</b>	1280 mm
<b>Packed width</b>	960 mm	<b>Gross weight (kg)</b>	122,000
<b>Packaged depth</b>	890 mm	<b>Packed product dimensions</b>	

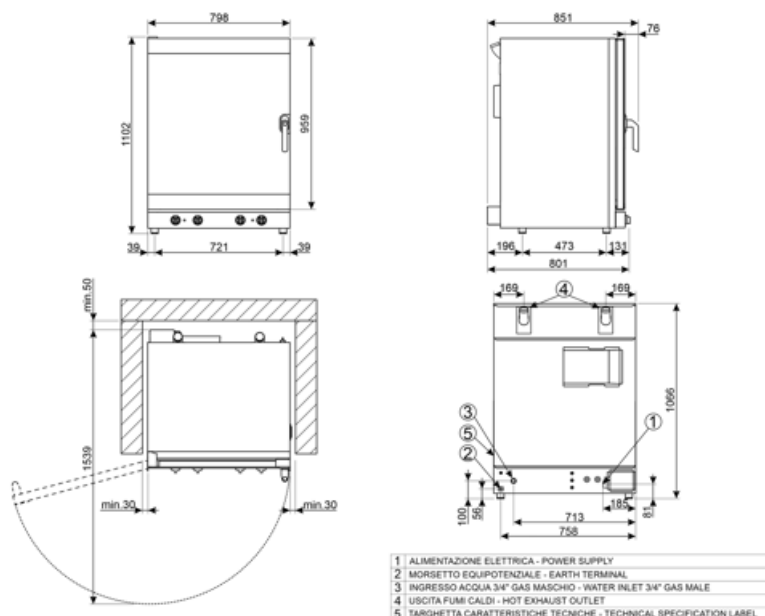

## Compatible Accessories



**3743**

Kit of 4 flat aluminum trays EN 600×400 mm



**3751**

Flat perforated aluminium tray (4pcs)



**3805**

Kit of 4 chrome-plated wire grids EN 600×400 mm




**3810**

Kit of 4 wave wire grids for baguettes EN 600×400 mm



**3927**

Air flow reducer kit for ovens ALFA410, 420, 625, 1035



**RGN11-1035-2**

Support rack for GN 1/1 flat trays, suitable for ALFA1035 models



**RUTVL**

Set of 4 wheels, fits all professional oven tables



**T11TH20**

GN1/1 non-stick tray, 20 mm height



**T11TH40**

GN1/1 non-stick tray, 40 mm height




**T11XH20**

Aluminium GN1/1 tray, 20 mm height




**T11XH65**

GN1/1 aluminium tray, 65 mm height



**TF11XH2**

GN 1/1 perforated aluminium tray, 20 mm height



**TMF11TH2**

GN 1/1 non-sticking microperforated tray, 20 mm height

## Alternative products

---



**ALFA1035HR-2**

**Colour:** Stainless steel

## Symbols glossary

---



Electric



Fan forced heating



Fan forced heating with humidity injection

---

## Benefit (TT)

---

### **Mechanical control panel**

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.

In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

### **Hinged opening**

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

### **Humidity management**

Impeccable cooking thanks to precise humidity control

Thanks to the effective management of small amounts of humidity, perfect browning can be achieved while maintaining the product's softness and promoting the development of its internal structure. Different humidity levels can be set, which determine the frequency of activation cycles. Each cycle consists of two seconds of water vapour spraying inside the cooking chamber, followed by a 15-second pause.