


# ALFA1035H-2

<b>Product Family</b>	Ovens
<b>Subfamily</b>	Convection oven 10 trays EN 600x400 mm or GN1/1
<b>Oven type</b>	Fan with humidification
<b>Oven controls</b>	Mechanical
<b>Tray capacity</b>	10 trays 600x400 mm - GN1/1
<b>Default power supply</b>	400 V 3N~ / 23A / 16 kW / 50-60 Hz
<b>Steam technology</b>	Direct
<b>App for recipe development and upload</b>	Not available
<b>Maximum depth with open door</b>	1536 mm
<b>Adjustable feet</b>	Yes
<b>Net weight (kg)</b>	102,000 kg
<b>Product dimensions WxDxH</b>	798x772x1100 mm
<b>EAN code</b>	8017709270148

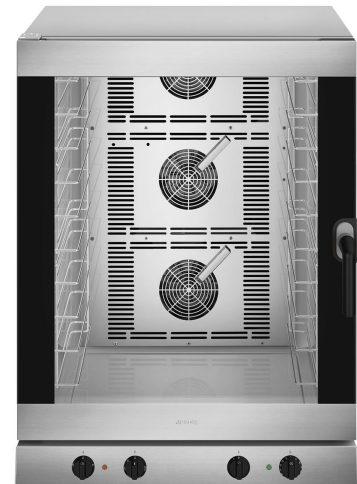

## Target

<b>Potential users</b>	Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's shops	<b>Suggested for</b>	Bars/Cafes
------------------------	---	----------------------	------------

## Aesthetics

<b>Colour</b>	Stainless steel	<b>Front panel Logo</b>	Yes Smeg printed
<b>Door with stainless steel strip</b>	Yes		

## Controls

<b>Adjustable timer</b>	1-60 minutes + continuous	<b>Adjustable chimney</b>	Manual
-------------------------	---------------------------	---------------------------	--------

## Options




<b>Right hand hinge</b>	ALFA1035HR-2	<b>Condense hood</b>	K4610X
<b>Right hand hinge</b>	ALFA1035EHR		

## Construction

<b>Oven material</b>	Stainless steel/glass/plastics	<b>Humidification system on each fan</b>	Yes
<b>Cavity dimensions (WxDxH)</b>	672x437x854mm	<b>Steam assisted levels</b>	Manual


<b>Gross volume</b>	616x431x340mm
<b>Net volume</b>	616x431x340mm
<b>Internal net volume</b>	199,1 lt
<b>Cavity material</b>	Stainless steel
<b>No. of shelves</b>	10
<b>Tray support frame</b>	Chrome
<b>Distance between shelves</b>	77 mm
<b>Door construction</b>	Yes
<b>Door opening</b>	Lateral
<b>Handle type</b>	New ergonomics
<b>Inner glass</b>	Openable
<b>Fan type and number</b>	3 contrarotating fans with time direction reversal
<b>Fan motor power</b>	180W
<b>Fan speed</b>	Single speed
<b>Max motor speed (rpm)</b>	2

<b>Exhaust exit</b>	Back
<b>Time adjustment</b>	Electromechanical timer
<b>Temperature range</b>	50-270°C
<b>End of cooking alarm</b>	Yes
<b>Orange light indicator when t° achieved</b>	Yes
<b>Green light indicator when time achieved</b>	Yes
<b>Heating element interruption with open door</b>	Yes
<b>Manual safety thermostat reset</b>	Yes
<b>Removable deflector</b>	Yes
<b>No. of lights</b>	3 Halogen lights
<b>Light power</b>	40 W
<b>Water connection</b>	Yes
<b>Power cable length</b>	170 cm
<b>Back panel</b>	Galvanized
<b>IPX protection</b>	Scheduled start H/12



<b>Q</b>	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
<b>E</b>	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
<b>C</b>	TUBO DI CARICO FILLER HOSE


## Compatible Accessories



**3743**  
Flat aluminium tray



**3751**  
Flat perforated aluminium tray




**3805**  
Flat chrome-plated wire grid



**3810**  
Corrugated grid for baguettes



**3927**  
Air flow reducer kit



**RGN11-1035-2**



**T11TH20**  
2cm height GN1/1 non-stick tray for Galileo professional




**T11TH40**  
4cm height GN1/1 non-stick tray for Galileo professional




**T11XH20**  
2cm height aluminium GN1/1 tray for Galileo professional



**T11XH65**  
6,5cm height aluminium GN1/1 tray for Galileo professional



**TF11XH2**  
Perforated aluminium GN1/1 tray for Galileo professional



**TMF11TH2**  
GN 1/1 non-sticking microperforated tray

## Alternative products

---



**ALFA1035HR-2**

**Colour: Stainless steel**

## Symbols glossary

---



Fan forced



Fan with humidification