


ALFA1035H-2

Family	Professional ovens
Subfamily	Convection oven 10 trays EN 600x400 mm or GN1/1
Oven type	Convection oven with humidification
Oven control	Manual
Trays capacity	10 trays GN1/1 or 10 EN 600x400 mm (excluding flat grids and trays)
Power supply	400 V 3N~ / 23A / 16 kW / 50-60 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1536 mm
Adjustable feet	Yes
Net weight	102.000 kg
Product dimensions WxDxH	798x772x1100 mm

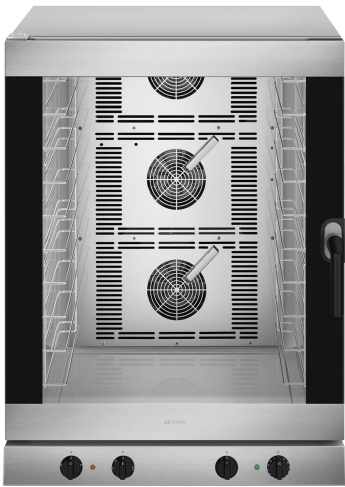

Target

Solutions	Bakery/Pastry making; Frozen bakery industry; Food retail	Suggested for	Bakery
-----------	---	---------------	--------

Aesthetics

Colour	Stainless steel	Front panel	Yes
Door with stainless steel stripes	Yes	Logo	Smeg printed

Controls

Timer setting range	1-60 minutes + endless	Chimney regulation	Manual
---------------------	------------------------	--------------------	--------

Programme / Functions

Backing functions


 Convection	 Convection with humidification
---	--

Options

Right hand hinge	ALFA1035HR-2	Combinable hood	K4610X
Right hand hinge	Yes		

Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
Cavity dimensions (wxdxh)	672x437x854 mm	Humidification levels	Manual
Gross volume	289,8 lt	Exhaust position	Back
Net volume	258,9 lt	Timer type	Electric
Internal net volume	199,1 lt	Temperature range	50-270°C
Cavity material	Stainless steel	End cooking signal	Yes
Shelves number	10	Orange light indicator t° achievement	Yes
Tray frame support	Chromed wire	Green light indicator time achievement	Yes
Shelves distance	77 mm	Safety switch with open door	Yes
Door construction	Double glass	Manual reset safety thermostat	Yes
Door opening	Lateral - left hinge	Removable deflector	Yes
Handle type	Rotating	Lighting	3 Halogen lamps
Glass	Openable with hinge	Light power	40 W
Fan type and number	3 contrarotating with timed direction reversal	Water load pipe	Yes
Fan motor power	Progressive %	Power cable length	170 cm
Engine rpm	Single speed	Back panel	Galvanized
Motor rpm in standard speed	2850 rpm	IPX protection	IPX3

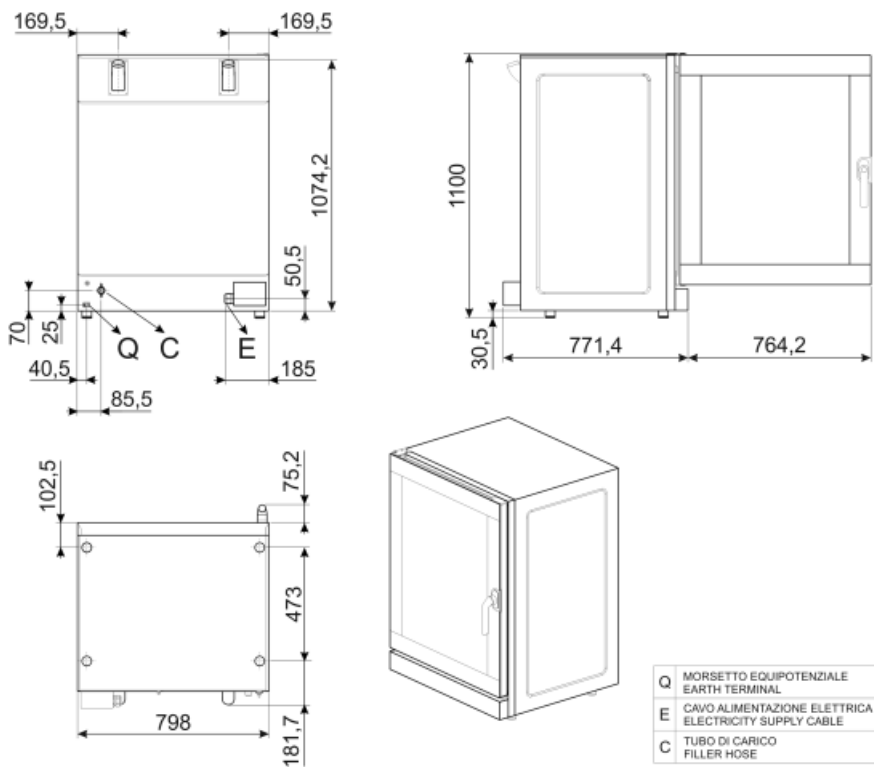

Not included accessories




3805

Flat chrome-plated wire grid (4pcs)




3927

Air flow reducer kit for ovens
ALFA410, 420, 625, 1035




TF11XH2

Perforated aluminium GN1/1 tray for
Galileo professional



3743

Flat aluminium tray (4pcs)



TMF11TH2

GN 1/1 non-sticking microperforated
tray



T11XH20

2cm height aluminium GN1/1 tray for
Galileo professional



T11XH65

6,5cm height aluminium GN1/1 tray for
Galileo professional




T11TH20

2cm height GN1/1 non-stick tray for
Galileo professional




3751

Flat perforated aluminium tray (4pcs)



3810

Waved grid for baguettes (4pcs)



RGN11-1035-2

Support kit for grids or flat trays GN1/1
suitable for ALFA1035 models



T8S11T

8 holes GN 1/1 non-sticking tray for
Galileo professional



T11TH40

4cm height GN1/1 non-stick tray for
Galileo professional

Alternative products



ALFA1035HR-2

Colour: Stainless steel

Symbols glossary (TT)



Fan forced heating



Fan forced heating with humidity
injection