

ALFA420MFH-2

Product Family	Ovens
Subfamily	Convection oven 4 trays EN 600x400 mm or GN1/1
Oven type	Multifunction convection oven with humidifier
Oven controls	Mechanical
Tray capacity	4 trays 600x400 mm - GN1/1
Default power supply	400 V 3N~ / 10 A / 6,9 kW / 50 Hz
Other electrical connections	230 V~ / 30 A / 6.9 kW / 50 Hz
App for recipe development and upload	Not available
Maximum depth with open door	1145 mm
Adjustable feet	Yes
Net weight (kg)	63,000 kg
Product dimensions WxDxH	798x747x563 mm
EAN code	8017709270124



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's shops; QSR	Suggested for	Bars/Cafes
------------------------	---	----------------------	------------

Aesthetics

Colour	Stainless steel	Front panel	Yes
Door with stainless steel strip	Yes	Logo	Smeg printed

Controls

Adjustable timer	1-60 minutes + continuous
-------------------------	---------------------------



Options

Condense hood	K4610X
----------------------	--------

Construction


Oven material	Stainless steel/glass/plastics	Steam assisted levels	Manual
		Exhaust exit	Back

Cavity dimensions (WxDxH)	672x437x340mm	Cooling system	Yes
Gross volume	670x560x420mm	Time adjustment	Electromechanical timer
Net volume	670x560x420mm	Temperature range	70-270°C
Internal net volume	75 lt	End of cooking alarm	Yes
Cavity material	Stainless steel	Orange light indicator when t° achieved	Yes
No. of shelves	4	Green light indicator when time achieved	Yes
Tray support frame	Chrome	Heating element interruption with open door	Yes
Distance between shelves	77 mm	Manual safety thermostat reset	Yes
Door construction	Yes	Removable deflector	Yes
Door opening	Drop down	No. of lights	2 LED lights
Handle type	Smeg	Light power	40 W
Inner glass	Removable	Water connection	Yes
Fan type and number	2 contrarotating fans with time direction reversal	Power cable length	170 cm
Fan motor power	180W	Back panel	Galvanized
Fan speed	Single speed	IPX protection	Scheduled start H/12
Max motor speed (rpm)	2		

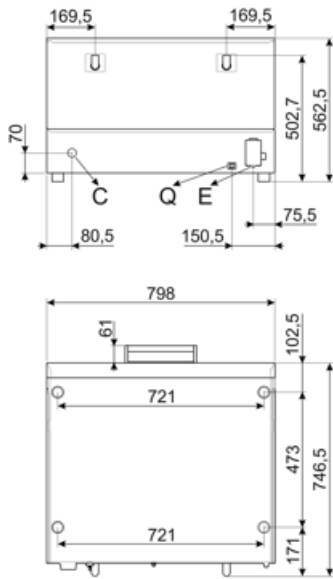

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO (solo su alcuni modelli) FILLER HOSE (on some models only)

Not included accessories




3743
Flat aluminium tray



3751
Flat perforated aluminium tray




3805
Flat chrome-plated wire grid



3810
Corrugated grid for baguettes



3927
Air flow reducer kit



RGN11-420-2
Support kit for grids or flat trays
GN1/1 suitable for ALFA420/425/410
models



SVRPP420-625
Connector kit for two stacked
ALFA420+420 or ALFA420+625 models
and hood


SVRPP625
Conjunction kit for 2 ovens series
625/420 and hood



T11TH20
2cm height GN1/1 non-stick tray for
Galileo professional




T11TH40
4cm height GN1/1 non-stick tray for
Galileo professional




T11XH20
2cm height aluminium GN1/1 tray for
Galileo professional



T11XH65
6,5cm height aluminium GN1/1 tray
for Galileo professional



TF11XH2
Perforated aluminium GN1/1 tray for
Galileo professional



TMF11TH2
GN 1/1 non-sticking microperforated
tray

Symbols glossary



Fan with lower element



Fan forced



Fan with humidification



Large grill



Upper and lower elements