

ALFA43X



Family Ovens

Subfamily Convection oven 4 trays 435x320 mm

Power supply Electric
Oven type One function
Oven control Mechanical

Trays capacity 4 trays 435x320 mm

Power supply $230 \text{ V} \sim / 13 \text{ A} / 3.0 \text{ kW} / 50 \text{ Hz}$

Maximum depth with open door993 mmAdjustable feetYesNet weight32,800 kg

Product dimensions WxDxH 602x580x537 mm EAN code 8017709236731



Distribution

Solutions Bars/Cafes; Hotels;

Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Buthcher's

shops; QSR

Aesthetics

Colour Door with stainless

steel stripes

Stainless steel

Yes

Front panel Logo Yes

Smeg printed

Controls

Timer setting range 1-60 minutes + endless

Options

Other versions ALFA43UK versione con

spina inglese; ALFA43K versione a 60Hz; ALFA43KSA versione a 60Hz con spina inglese Solutions

Restaurants/Catering

Accessories Included



Aluminized tray 3820 kit of 4 pieces

Electrical Connection

Plug (F;E) Schuko

Construction

Oven materials Ever Clean enamel
Cavity dimensions
(lxdxh)
Internal net volume 54,5 lt
Cavity material Ever Clean enamel
Shelves number 4
Tray frame support Chrome
Shelves distance 80 mm

Shelves distance 80 mm

Door construction Double glass

Door opening Tilting

Handle type Smeg

Openable glass Removable

Fan type and number 1

Engine speed 2
Engine speed Single speed

Max standard speed 2

motor rpm

Exhaust position

Timer type

Temperature range

End cooking signal
Orange light indicator to

achievement

Green light indicator to

achievement

Manual reset safety

thermostat

Removable deflector

Lighting

Light power

Power cable length Back panel

IPX protection

2700 rpm

Back

Electromecanical timer

50-250°C

Yes

Yes

Yes

Yes


Yes

1 Halogen lamp

40 W 115 cm

Galvanized

Scheduled start H/12

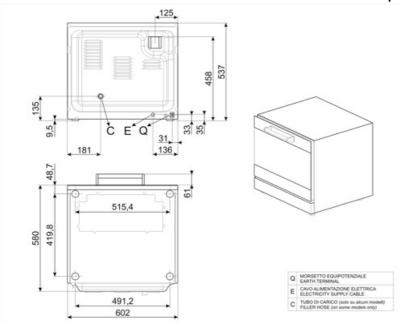



Compatible Accessories



3755

Flat perforated aluminium tray



3780

Flat non-stick trays



3820

Flat aluminium tray



3900

Flat chrome-plated wire grid (4pcs)



3926

Air flow reducer kit



4730

External tank kit 5 lt.



Symbols glossary



Electric





Benefit (TT)

Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released. In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.