# ALFA43X

| | |
|---|---|
| **Family** | Ovens |
| **Subfamily** | Convection oven 4 trays 435x320 mm |
| **Power supply** | Electric |
| **Oven type** | One function |
| **Oven control** | Mechanical |
| **Trays capacity** | 4 trays 435x320 mm |
| **Power supply** | 230 V~ / 13 A / 3,0 kW / 50 Hz |
| **Adjustable feet** | Yes |
| **Product dimensions WxDxH** | 602x580x537 mm |
| **Maximum depth with open door** | 993 mm |

## Distribution

| | |
|---|---|
| **Industries** | Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Butcher shops / Delicatessens; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail |

## Aesthetics

| | | | |
|---|---|---|---|
| **Door with stainless steel stripes** | Yes | **Front panel** | Yes |
| | | **Serie** | Alfa |
| **Colour** | Stainless steel | | |

## Controls

| | |
|---|---|
| **Timer setting range** | 1-60 minutes + endless |

## Options

| | | | |
|---|---|---|---|
| **Other versions** | ALFA43UK versione con spina inglese; ALFA43K versione a 60Hz; ALFA43KSA versione a 60Hz con spina inglese | **Solutions** | Restaurants/Catering |

# Accessories Included

**Aluminized tray 3820**      kit of 4 pieces

# Electrical Connection

**Plug**                      (F;E) Schuko

# Construction

| | | | |
|---|---|---|---|
| **Oven materials** | Ever Clean enamel | **Max standard speed motor rpm** | 2700 rpm |
| **Cavity dimensions (lxdxh)** | 460x360x425mm | **Exhaust position** | Back |
| **Internal net volume** | 54,5 lt | **Timer type** | Electromecanical timer |
| **Cavity material** | Ever Clean enamel | **Temperature range** | 50-250°C |
| **Shelves number** | 4 | **End cooking signal** | Yes |
| **Tray frame support** | Chrome | **Orange light indicator t° achievement** | Yes |
| **Shelves distance** | 80 mm | **Green light indicator t° achievement** | Yes |
| **Door construction** | Double glass | | |
| **Door opening** | Tilting | **Manual reset safety thermostat** | Yes |
| **Handle type** | Smeg | **Removable deflector** | Yes |
| **Openable glass** | Removable | **Lighting** | 1 Halogen lamp |
| **Fan type and number** | 1 | **Light power** | 40 W |
| **Engine speed** | 2 | **Power cable length** | 115 cm |
| **Engine speed** | Single speed | **Back panel** | Galvanized |
| | | **IPX protection** | Scheduled start H/12 |

# Logistic Information

| | | | |
|---|---|---|---|
| **Packed product dimensions (WxDxH)** | 610x625x695 mm | **Net weight** | 32,800 kg |
| | | **Gross weight (kg)** | 34,900 kg |
| **EAN code** | 8017709236731 | | |

| | |
|---|---|
| 1 | ALIMENTAZIONE ELETTRICA - POWER SUPPLY |
| 2 | MORSETTO EQUIPOTENZIALE - EARTH TERMINAL |
| 3 | INGRESSO ACQUA 3/4" GAS MASCHIO - WATER INLET 3/4" GAS MALE |
| 4 | USCITA FUMI CALDI - HOT EXHAUST OUTLET |
| 5 | TARGHETTA CARATTERISTICHE TECNICHE - TECHNICAL SPECIFICATION LABEL |

# smeg
**PROFESSIONAL**
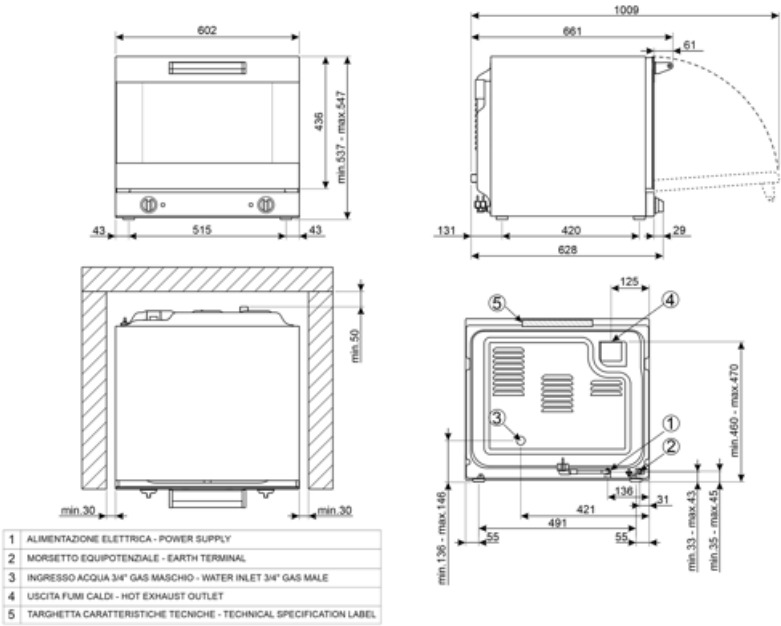
## Compatible Accessories

**3755**

Flat perforated aluminium tray

**3780**

Flat non-stick trays

**3820**

Flat aluminium tray

**3900**

Flat chrome-plated wire grid (4pcs)

**3926**

Air flow reducer kit

**4730**

External tank kit 5 lt.

**RUTVL**

Wheels kit for all oven table models (4pcs)

**TVL40**

8-level tray holder rack for ALFA43 ovens, dim. 600x600x900 mm (hieight with kit RUTVL: 998 mm)

# Symbols glossary

| | Electric | | Fan forced heating |
|---|---|---|---|

# Benefit (TT)

## Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.
In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

## Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.