ALFA43X

Family	Professional ovens
Subfamily	Convection oven 4 trays 435x320 mm
Power supply	Electric
Oven type	Convection oven
Oven control	Manual
Trays capacity	4 trays 435x320 mm
Power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Adjustable feet	Yes
Product dimensions WxDxH	602x580x537 mm
Maximum depth with open door	993 mm

Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail; QSR

Aesthetics

Series	Alfa	**Front panel**	Yes
Colour	Stainless steel	**Logo**	Smeg printed
Door with stainless steel stripes	Yes		

Controls

Timer setting range	1-60 minutes + endless

Options

Other versions	ALFA43UK versione con spina inglese; ALFA43K versione 60Hz; ALFA43KSA versione 60Hz con spina inglese	**Combinable hood**	K43X

Accessories Included

Aluminized tray 3820   kit of 4 pieces

Electrical Connection

Plug	(F;E) Schuko

Construction

Oven materials	Stainless steel / glass / plastics	**Motor rpm in standard speed**	2700 rpm
Cavity dimensions (wxdxh)	460x360x425 mm	**Exhaust position**	Back
		Timer type	Electric
Internal net volume	54,5 lt	**Temperature range**	50-250°C
Cavity material	Ever Clean enamel	**End cooking signal**	Yes
Shelves number	4	**Orange light indicator t° achievement**	Yes
Tray frame support	Chromed wire		
Shelves distance	80 mm	**Green light indicator time achievement**	Yes
Door construction	Double glass		
Door opening	Tilting	**Manual reset safety thermostat**	Yes
Handle type	Fixed		
Glass	Openable with clip	**Removable deflector**	Yes
Fan type and number	Fan with fixed rotation	**Lighting**	1 Halogen lamp
Fan motor power	80W	**Light power**	40 W
Engine rpm	Single speed	**Power cable length**	115 cm
		Back panel	Galvanized
		IPX protection	IPX3

Logistic Information

Net weight	32,800 kg	**Height (mm) packed**	610 mm
Packed width	625 mm	**Gross weight (kg)**	34,900
Packaged depth	695 mm	**Packed product dimensions**	

|	
1	ALIMENTAZIONE ELETTRICA - POWER SUPPLY
2	MORSETTO EQUIPOTENZIALE - EARTH TERMINAL
3	INGRESSO ACQUA 3/4" GAS MASCHIO - WATER INLET 3/4" GAS MALE
4	USCITA FUMI CALDI - HOT EXHAUST OUTLET
5	TARGHETTA CARATTERISTICHE TECNICHE - TECHNICAL SPECIFICATION LABEL
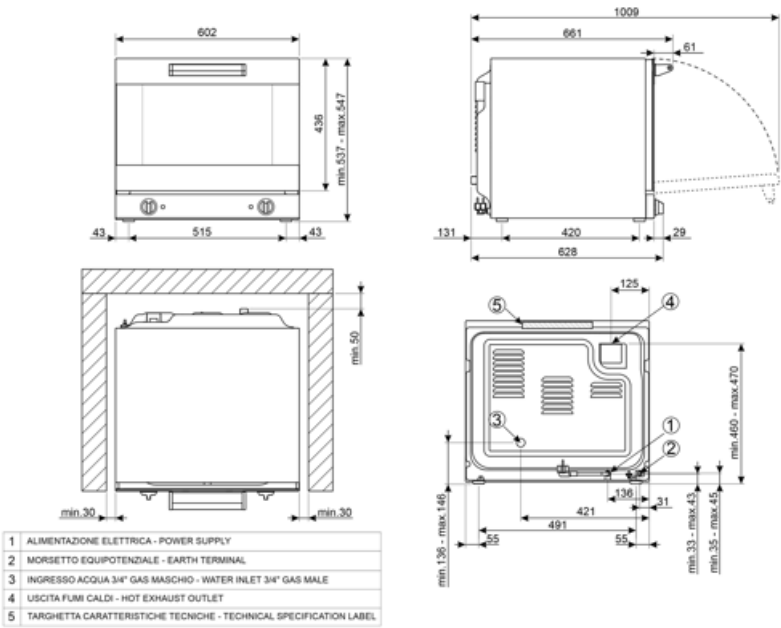
Compatible Accessories

3755

Flat perforated aluminium tray (4pcs)

3780

Flat non-stick trays (4pcs)

3820

Flat aluminised steel tray (4pcs)

3900

Flat chrome-plated wire grid (4pcs)

3926

Air flow reducer kit for ALFA43 ovens

4730

External tank kit 5 lt.

RUTVL

Wheels kit for all oven table models (4pcs)

TVL40

Oven stand for 8 trays - 600x600x900/950mm

Symbols glossary

⊏⊏	Electric	⊛	Fan forced heating

Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.
In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.