

ALFA43X



| | |
|------------------------------|------------------------------------|
| Family | Professional ovens |
| Subfamily | Convection oven 4 trays 435x320 mm |
| Power supply | Electric |
| Oven type | Convection oven |
| Oven control | Manual |
| Trays capacity | 4 trays 435x320 mm |
| Power supply | 230 V~ / 13 A / 3,0 kW / 50 Hz |
| Maximum depth with open door | 993 mm |
| Adjustable feet | Yes |
| Net weight | 32,800 kg |
| Product dimensions WxDxH | 602x580x537 mm |
| EAN code | 8017709236731 |



Target

| | |
|-----------|--|
| Solutions | Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail; QSR |
|-----------|--|

Aesthetics

| | | | |
|-----------------------------------|-----------------|-------------|--------------|
| Colour | Stainless steel | Front panel | Yes |
| Door with stainless steel stripes | Yes | Logo | Smeg printed |

Controls

| | |
|---------------------|------------------------|
| Timer setting range | 1-60 minutes + endless |
|---------------------|------------------------|

Options

| | | | |
|----------------|---|-----------------|------|
| Other versions | ALFA43UK versione con spina inglese; ALFA43K versione 60Hz; ALFA43KSA versione 60Hz con spina inglese | Combinable hood | K43X |
|----------------|---|-----------------|------|

Accessories Included


Aluminized tray 3820 kit of 4 pieces

Electrical Connection

Plug (F;E) Schuko

Construction

| | | | |
|---------------------------|------------------------------------|--|----------------|
| Oven materials | Stainless steel / glass / plastics | Motor rpm in standard speed | 2700 rpm |
| Cavity dimensions (wxdxh) | 460x360x425 mm | Exhaust position | Back |
| Internal net volume | 54,5 lt | Timer type | Electric |
| Cavity material | Ever Clean enamel | Temperature range | 50-250°C |
| Shelves number | 4 | End cooking signal | Yes |
| Tray frame support | Chromed wire | Orange light indicator t° achievement | Yes |
| Shelves distance | 80 mm | Green light indicator time achievement | Yes |
| Door construction | Double glass | Manual reset safety thermostat | Yes |
| Door opening | Tilting | Removable deflector | Yes |
| Handle type | Fixed | Lighting | 1 Halogen lamp |
| Glass | Openable with clip | Light power | 40 W |
| Fan type and number | Fan with fixed rotation | Power cable length | 115 cm |
| Fan motor power | 80W | Back panel | Galvanized |
| Engine rpm | Single speed | IPX protection | IPX3 |

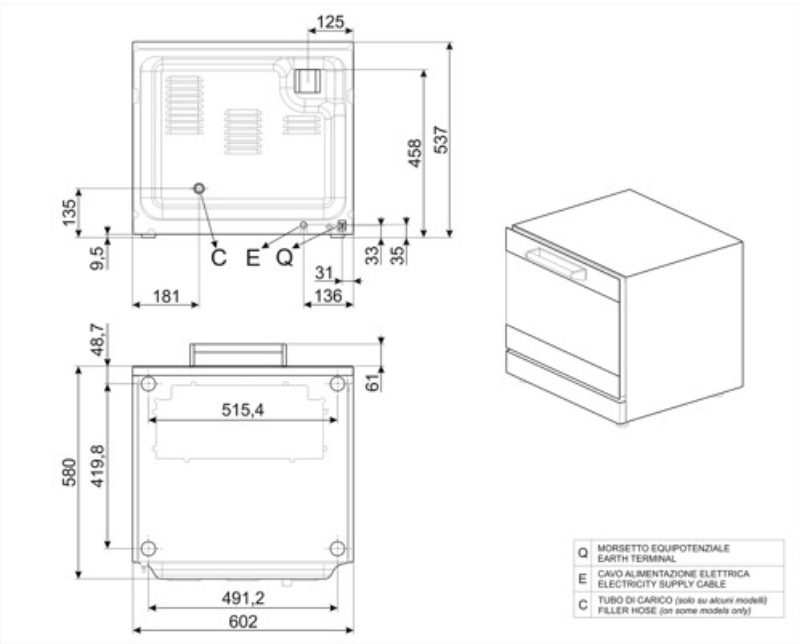


Compatible Accessories



3755

Flat perforated aluminium tray (4pcs)




3780

Flat non-stick trays (4pcs)



3820

Flat aluminised steel tray (4pcs)



3900

Flat chrome-plated wire grid (4pcs)



3926

Air flow reducer kit for ALFA43 ovens



4730

External tank kit 5 lt.

Symbols glossary



Electric



Fan forced heating

Benefit (TT)

Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.

In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.