

# ALFA43X



<b>Family</b>	Professional ovens
<b>Subfamily</b>	Convection oven 4 trays 435x320 mm
<b>Power supply</b>	Electric
<b>Oven type</b>	Convection oven
<b>Oven control</b>	Manual
<b>Trays capacity</b>	4 trays 435x320 mm
<b>Power supply</b>	230 V~ / 13 A / 3,0 kW / 50 Hz
<b>Adjustable feet</b>	Yes
<b>Product dimensions WxDxH</b>	602x580x537 mm
<b>Maximum depth with open door</b>	993 mm



## Target

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Butcher shops / Delicatessens; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	--

## Aesthetics

<b>Door with stainless steel stripes</b>	Yes	<b>Front panel Series</b>	Yes
<b>Colour</b>	Stainless steel		Alfa

## Controls

<b>Timer setting range</b>	1-60 minutes + endless
----------------------------	------------------------

## Options

<b>Other versions</b>	ALFA43UK versione con spina inglese; ALFA43K versione 60Hz; ALFA43KSA versione 60Hz con spina inglese	<b>Combinable hood</b>	K43X
-----------------------	---	------------------------	------

## Accessories Included

**Aluminized tray 3820** kit of 4 pieces

## Electrical Connection


Plug (F;E) Schuko

## Construction

<b>Oven materials</b>	Stainless steel / glass / plastics	<b>Motor rpm in standard speed</b>	2700 rpm
<b>Cavity dimensions (wx dx h)</b>	460x360x425 mm	<b>Exhaust position</b>	Back
<b>Internal net volume</b>	54,5 lt	<b>Timer type</b>	Electric
<b>Cavity material</b>	Ever Clean enamel	<b>Temperature range</b>	50-250°C
<b>Shelves number</b>	4	<b>End cooking signal</b>	Yes
<b>Tray frame support</b>	Chromed wire	<b>Orange light indicator t° achievement</b>	Yes
<b>Shelves distance</b>	80 mm	<b>Green light indicator time achievement</b>	Yes
<b>Door construction</b>	Double glass	<b>Manual reset safety thermostat</b>	Yes
<b>Door opening</b>	Tilting	<b>Removable deflector</b>	Yes
<b>Handle type</b>	Fixed	<b>Lighting</b>	1 Halogen lamp
<b>Glass</b>	Openable with clip	<b>Light power</b>	40 W
<b>Fan type and number</b>	Fan with fixed rotation	<b>Power cable length</b>	115 cm
<b>Fan motor power</b>	80W	<b>Back panel</b>	Galvanized
<b>Engine rpm</b>	Single speed	<b>IPX protection</b>	IPX3

## Logistic Information

<b>Packed product dimensions (WxDxH)</b>	610x625x695 mm	<b>Net weight</b>	32,800 kg
		<b>Gross weight (kg)</b>	34,900 kg
<b>EAN code</b>	8017709236731		

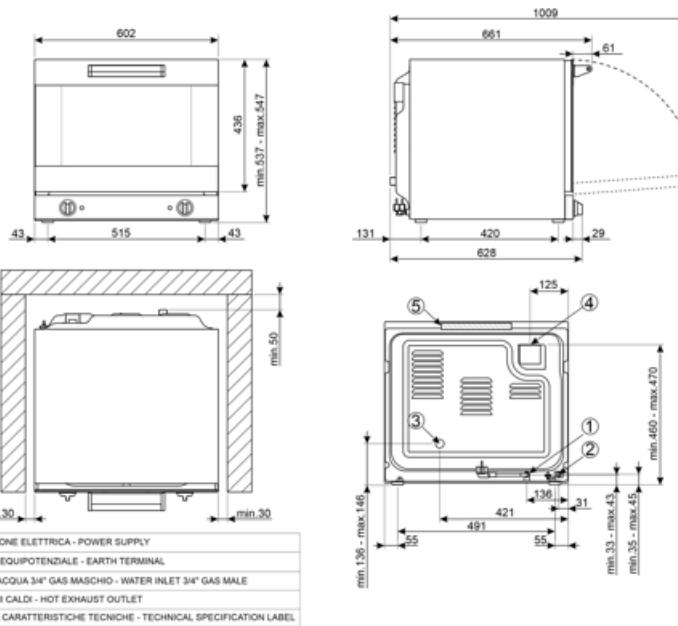

## Compatible Accessories



**3755**

Flat perforated aluminium tray (4pcs)



**3780**

Flat non-stick trays (4pcs)



**3820**

Flat aluminised steel tray (4pcs)



**3900**

Flat chrome-plated wire grid (4pcs)



**3926**

Air flow reducer kit for ALFA43 ovens



**4730**

External tank kit 5 lt.



**RUTVL**

Wheels kit for all oven table models  
(4pcs)



**TVL40**

8-level tray holder rack for ALFA43  
ovens, dim. 600x600x900 mm (height  
with kit RUTVL: 998 mm)

---

## Symbols glossary

---

 Electric

 Fan forced heating

## Benefit (TT)

---

### **Mechanical control panel**

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.

In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

### **Clip-open**

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.