

# ALFA43XE

<b>Family</b>	Professional ovens
<b>Subfamily</b>	Convection oven 4 trays 435x320 mm
<b>Oven type</b>	Convection oven
<b>Power supply</b>	230 V~ / 13 A / 3,0 kW / 50-60 Hz
<b>Program storage with application</b>	Not available
<b>Adjustable feet</b>	Yes
<b>Product dimensions (WxDxH)</b>	602x580x537 mm
<b>Maximum depth with open door</b>	993 mm



## Target

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Food Industries; Food retail; QSR	<b>Destination</b>	Not available for EU market
-------------------	--	--------------------	-----------------------------

## Aesthetics

<b>Door with stainless steel stripes</b>	Yes	<b>Digit display color</b>	Red
<b>Colour</b>	Stainless steel	<b>Front panel</b>	Yes

## Controls

<b>Timer setting range</b>	1-99 minutes + endless
----------------------------	------------------------

## Options

<b>60Hz version</b>	Yes	<b>Combinable hood</b>	K43X
---------------------	-----	------------------------	------

## Accessories included

<b>Aluminized tray 3820</b>	kit of 4 pieces
-----------------------------	-----------------

## Electrical Connection


Plug (F;E) Schuko

## Construction

<b>Oven materials</b>	Stainless steel / glass / plastics	<b>Motor rpm in standard speed</b>	2700 rpm
<b>Cavity dimensions (WxDxH)</b>	460x360x425 mm	<b>Humidification levels</b>	None
<b>Internal net volume</b>	54,5 lt	<b>Exhaust position</b>	Back
<b>Cavity material</b>	Ever Clean enamel	<b>Timer type</b>	Electrical
<b>Shelves number</b>	4	<b>Temperature range</b>	50-250°C
<b>Tray frame support</b>	Chromed wire	<b>End cooking signal</b>	Yes
<b>Shelves distance</b>	80 mm	<b>Manual reset safety thermostat</b>	Yes
<b>Door construction</b>	Double glass	<b>Removable deflector</b>	Yes
<b>Door opening</b>	Tilting	<b>Lighting</b>	1 Halogen lamp
<b>Handle type</b>	Fixed	<b>Light power</b>	40 W
<b>Glass</b>	Openable with clip	<b>Power cable length</b>	115 cm
<b>Fan motor power</b>	80 W	<b>Back panel</b>	Galvanized
<b>Engine rpm</b>	Single speed	<b>IPX protection</b>	IPX3

## Logistic Information

<b>Packed product dimensions (WxDxH)</b>	610x625x695 mm	<b>Net weight</b>	32,800 kg
<b>EAN code</b>	8017709142872	<b>Gross weight</b>	34,900 kg

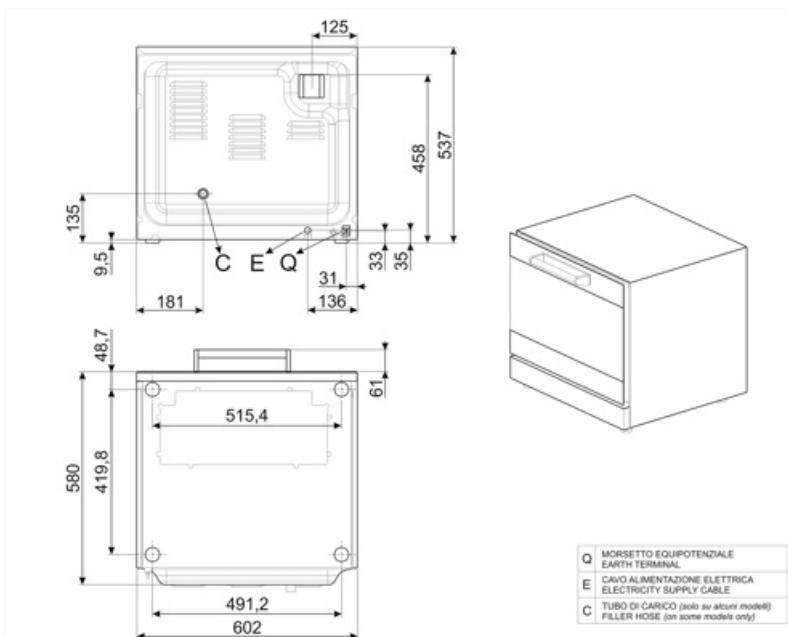

---

## Compatible Accessories

---



**3755**

Kit of 4 perforated aluminum-coated sheet metal trays 435×320 mm



**3780**

Kit of 4 non-stick trays 435×320 mm



**3926**

Air flow reducer kit for ALFA43/425 ovens



**4730**

5-litre external tank kit for ALFA43 ovens

## Symbols glossary

---



Fan forced heating

## Benefit (TT)

---

### Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.