

ALFA43XE

Family

Subfamily

Oven type

Power supply

Program storage with

application

Adjustable feet

Product dimensions WxDxH

Maximum depth with open door

Professional ovens

Convection oven 4 trays 435x320 mm

Convection oven

230 V~ / 13 A / 3,0 kW / 50-60 Hz

Not available

Yes

602x580x537 mm

993 mm



Target

Solutions

Coffee shops/Wine bars;

Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry;

Food retail; QSR

Destination

Not available for EU market

Aesthetics

Colour

Door with stainless

steel stripes

Digit display color

Stainless steel

Yes

Red

Front panel

Logo

Yes

Smeg printed

Controls

Timer setting range

1-99 minutes + endless

Options

60Hz version

Yes

Combinable hood

K43X

Accessories included

Aluminized tray 3820

kit of 4 pieces




Electrical Connection

Plug (F;E) Schuko

Construction

Oven materials Stainless steel / glass / plastics **Cavity dimensions** 460x360x425 mm (WxDxH) 54,5 lt Internal net volume Cavity material Ever Clean enamel Shelves number Tray frame support Chromed wire Shelves distance 80 mm **Door construction** Double glass Door opening Tilting Handle type Fixed Glass Openable with clip 80W Fan motor power Engine rpm Single speed

Motor rpm in standard 2700 rpm speed **Humidification levels** None **Exhaust position** Back Timer type Electrical Temperature range 50-250°C End cooking signal Yes Manual reset safety Yes thermostat Removable deflector Yes Lighting 1 Halogen lamp Light power 40 W Power cable length 115 cm Back panel Galvanized **IPX** protection IPX3

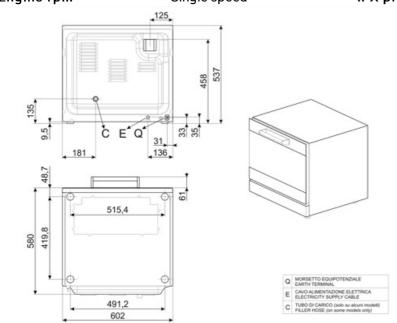



Compatible Accessories



3755

Kit of 4 perforated aluminum-coated sheet metal trays 435×320 mm



3780

Kit of 4 non-stick trays 435×320 mm





Air flow reducer kit for ALFA43 ovens



4730

5-litre external tank kit for ALFA43 ovens



Symbols glossary



Fan forced heating



Benefit (TT)

Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.