

ALFA43XE1HDS

Product Family	Ovens
Subfamily	Multifunction oven 4 trays 435x320 mm
Oven type	Multifunction convection oven with humidifier
Oven controls	Electronic
Tray capacity	4 trays 435x320 mm - GN2/3
Default power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Steam technology	Direct
App for recipe development and upload	Not available
Maximum depth with open door	1178 mm
Adjustable feet	Yes
Net weight (kg)	38,100 kg
Product dimensions WxDxH	608x600x537 mm
EAN code	8017709294366



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's shops; QSR
------------------------	--

Aesthetics

Colour	Stainless steel	Digital display colour	White
Door with stainless steel strip	Yes	Front panel	Yes
Display type	LCD	Logo	Smeg printed

Controls

Number of recipes	99	HACCP data	Scheduled start H/12
Adjustable timer	from 1 minute to 99 hours + endless	Self diagnostic	Yes
Cooking steps	3 + pre-heating		

Options

Condense hood	Restaurants/Catering
----------------------	----------------------

Accessories Included

Flat aluminium tray
3820

4 x trays


Water connection pipe Yes

Electrical Connection

Plug (F;E) Schuko

Construction


Oven material	Stainless steel/glass/plastics	Humidification system on each fan	Yes
Cavity dimensions (WxDxH)	460x360x425mm	Steam assisted levels	5 + manual
Internal net volume	54.5 lt	Exhaust exit	Back
Cavity material	Easy clean enamel	Time adjustment	Electronic timer
No. of shelves	4	Temperature range	30-270°C
Tray support frame	Chrome	End of cooking alarm	Yes
Distance between shelves	80 mm	Heating element interruption with open door	Yes
Door construction	Yes	Manual safety thermostat reset	Yes
Door opening	Drop down	Removable deflector	Yes
Handle type	Smeg	No. of lights	1 Halogen light
Inner glass	Removable	Light power	40 W
Fan type and number	1	USB port	Yes
Fan motor power	Double speed	Water connection	Yes
Fan speed	Double speed	Power cable length	115 cm
Max motor speed (rpm)	2700 rpm	Back panel	Galvanized
Low motor speed (rpm)	2100 rpm	IPX protection	Scheduled start H/12

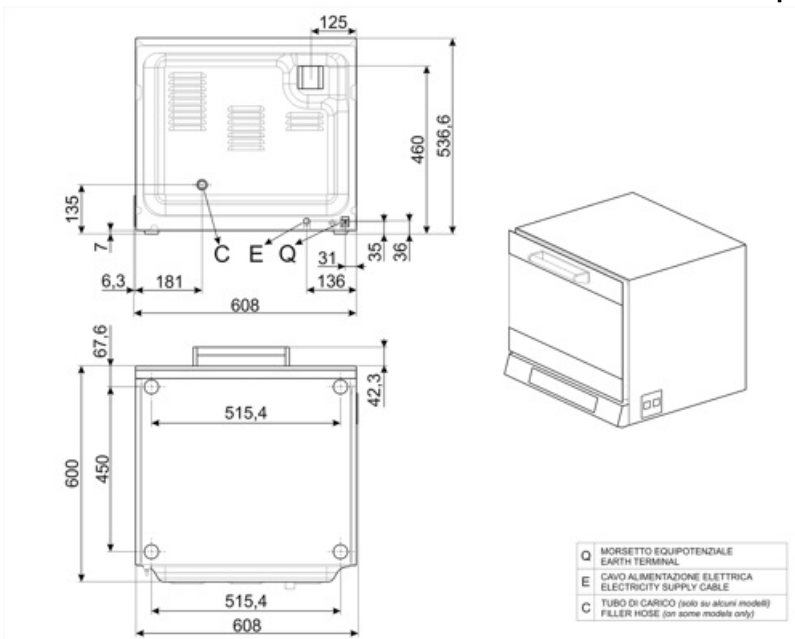

Compatible Accessories



3755
Flat perforated aluminium tray



3780
Flat non-stick trays



3820
Flat aluminium tray



3900
Flat chrome-plated wire grid (4pcs)



3926
Air flow reducer kit



4730
External tank kit 5 lt.

Symbols glossary



Double speed fan



Fan with lower element



Fan forced



Fan with humidification



Fan with large grill



Lower heating element



Upper and lower element heating with fan



Fan grill heating



Large grill



Upper and lower elements