

# ALFA43XE1HDS

Family	Professional ovens
Subfamily	Multifunction oven 4 trays 435x320 mm
Oven type	Multifunction convection oven with humidiifer
Oven control	Electronic
Trays capacity	4 trays 435x320 mm or GN2/3
Power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1178 mm
Adjustable feet	Yes
Net weight	38.100 kg
Product dimensions WxDxH	608x600x537 mm



## Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail; QSR
-----------	--

## Aesthetics










Colour	Stainless steel	Digit display color	White
Door with stainless steel stripes	Yes	Front panel	Yes
Display type	LCD	Logo	Smeg printed

## Controls


Storable programs number	99	HACCP data	Yes
Timer setting range	from 1 minute to 99 hours + endless	Self diagnostic	Yes
Cooking steps	3 + pre-heating		

## Programme / Functions

## Backing functions

 Convection	 Convection with humidification	 Convection with large grill
 Up & base	 Lower element	 Fan assisted base
 Upper and lower element with fan	 Large grill	 Fan grill

## Adjustable fan speed

 Double speed fan
---

## Options

Combinable hood	K43X
-----------------	------

## Accessories Included



Aluminized tray 3820	kit of 4 pieces	Water connection pipe	Yes
----------------------	-----------------	-----------------------	-----

## Electrical Connection

Plug	(F;E) Schuko
------	--------------

## Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
Cavity dimensions (wxdxh)	460x360x425 mm	Humidification levels	5 + manual
Internal net volume	54,5 lt	Exhaust position	Back
Cavity material	Ever Clean enamel	Timer type	Electrical
Shelves number	4	Temperature range	30-270°C
Tray frame support	Chromed wire	End cooking signal	Yes
Shelves distance	80 mm	Safety switch with open door	Yes
Door construction	Triple glass	Manual reset safety thermostat	Yes
Door opening	Tilting	Removable deflector	Yes
Handle type	Fixed	Lighting	1 Halogen lamp
Glass	With clip	Light power	40 W
Fan type and number	Fan with fixed rotation	USB port	Yes
Fan motor power	Dual speed	Water load pipe	Yes
Engine rpm	Dual speed	Power cable length	115 cm
Motor rpm in standard speed	2700 rpm	Back panel	Galvanized
Motor rpm in low speed	2100 rpm	IPX protection	IPX3

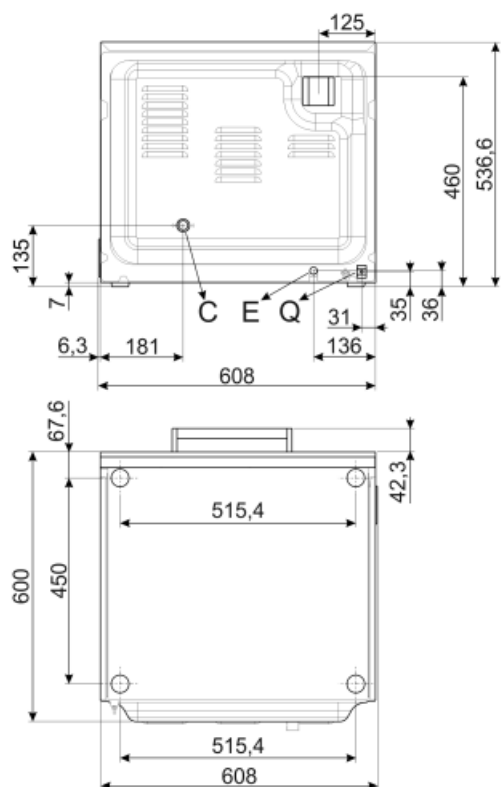

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO (solo su alcuni modelli) FILLER HOSE (on some models only)

---

## Not included accessories

---




**3820**

Flat aluminised steel tray (4pcs)



**4730**

External tank kit 5 lt.



**3780**

Flat non-stick trays (4pcs)



**3755**











Flat perforated aluminium tray (4pcs)



**3926**

Air flow reducer kit for ALFA43 ovens

# Symbols glossary (TT)

	Fan with lower element		Fan forced heating
	Fan forced heating with humidity injection		Fan assisted upper grill
	Large grill heating element		Static heating with upper and lower elements
	Double speed fan		Lower heating element
	Upper and lower element heating with fan		Fan grill heating