

ALFA43XE2HDS

Family Professional ovens

Subfamily Convection oven 4 trays 435x320 mm

Oven type Convection oven with humidification

Oven control Electronic

Trays capacity 4 trays 435x320 mm

Power supply 230 V~ / 13 A / 3,0 kW / 50 Hz

Steam generation Direct

Program storage with Not available

application

Maximum depth with open door 1178 mm Adjustable feet Yes

Net weight 36,700 kg

Product dimensions WxDxH 602x600x537 mm EAN code 8017709309787



Target

Solutions Coffee shops/Wine bars;

Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry;

Food retail; QSR

Aesthetics

Colour Stainless steel Digit display color White and red

Door with stainless

steel stripes

Yes

Display type LCD

Digit display color White and Front panel Yes

Logo Smeg printed

Controls

Storable programs 99 Cooking steps 2 + pre-heating

number

Timer setting range from 1 minute to 99 hours +

endless

Programme / Functions

Backing functions

& Convection



Convection with humidification



Adjustable fan speed



Double speed fan

Options

Combinable hood K43X

Accessories Included

Aluminized tray 3820 kit of 4 pieces Water connection pipe Yes


Electrical Connection

Plug (F;E) Schuko

Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
Cavity dimensions	460x360x425 mm	Humidification levels	5 + manual
(wxdxh)		Exhaust position	Back
Internal net volume	54,5 lt	Timer type	Electrical
Cavity material	Ever Clean enamel	Temperature range	30-270°C
Shelves number	4	End cooking signal	Yes
Tray frame support	Chromed wire	Safety switch with open	Yes
Shelves distance	80 mm	door	
Door construction	Triple glass	Manual reset safety	Yes
Door opening	Tilting	thermostat	
Handle type	Fixed	Removable deflector	Yes
Glass	With clip	Lighting	1 Halogen lamp
Fan type and number	Fan with fixed rotation	Light power	40 W
Fan motor power	Dual speed	Water load pipe	Yes
Engine rpm	Dual speed	Power cable length	115 cm
Motor rpm in standard	2700 rpm	Back panel	Galvanized
speed	·	IPX protection	IPX3
Motor rpm in low speed	2100 rpm		



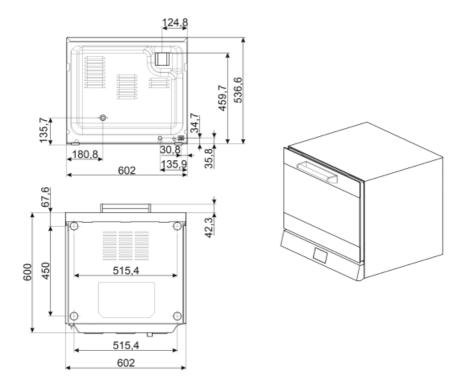



Not included accessories



3820

Flat aluminised steel tray (4pcs)



4730

External tank kit 5 lt.



3780

Flat non-stick trays (4pcs)



3755

Flat perforated aluminium tray (4pcs)



3900

Flat chrome-plated wire grid (4pcs)



3926

Air flow reducer kit for ALFA43 ovens



Symbols glossary (TT)



Fan forced heating



Fan forced heating with humidity injection



Double speed fan