

# ALFA43XE2HDS

Family	Professional ovens
Subfamily	Convection oven 4 trays 435x320 mm
Oven type	Convection oven with humidification
Oven control	Electronic
Trays capacity	4 trays 435x320 mm
Power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1178 mm
Adjustable feet	Yes
Net weight	36,700 kg
Product dimensions WxDxH	602x600x537 mm



## Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail; QSR
-----------	--

## Aesthetics

Colour	Stainless steel	Digit display color	White and red
Door with stainless steel stripes	Yes	Front panel	Yes
Display type	Digital TFT	Logo	Smeg printed

## Controls

Storable programs number	99	Cooking steps	2 + pre-heating
Timer setting range	from 1 minute to 99 hours + endless		

## Programme / Functions

### Backing functions




Convection



Convection with humidification

### Adjustable fan speed



Double speed fan

### Options

Combinable hood                      K43X

### Accessories Included



Aluminized tray 3820                      kit of 4 pieces                      Water connection pipe                      Yes

### Electrical Connection

Plug                      (F;E) Schuko

### Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
Cavity dimensions (wxdxh)	460x360x425 mm	Humidification levels	5 + manual
Internal net volume	54,5 lt	Exhaust position	Back
Cavity material	Ever Clean enamel	Timer type	Electrical
Shelves number	4	Temperature range	30-270°C
Tray frame support	Chromed wire	End cooking signal	Yes
Shelves distance	80 mm	Safety switch with open door	Yes
Door construction	Triple glass	Manual reset safety thermostat	Yes
Door opening	Tilting	Removable deflector	Yes
Handle type	Fixed	Lighting	1 Halogen lamp
Glass	With clip	Light power	40 W
Fan type and number	Fan with fixed rotation	Water load pipe	Yes
Fan motor power	Dual speed	Power cable length	115 cm
Engine rpm	Dual speed	Back panel	Galvanized
Motor rpm in standard speed	2700 rpm	IPX protection	IPX3
Motor rpm in low speed	2100 rpm		

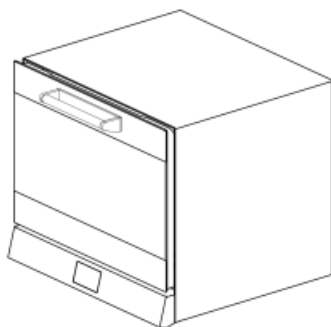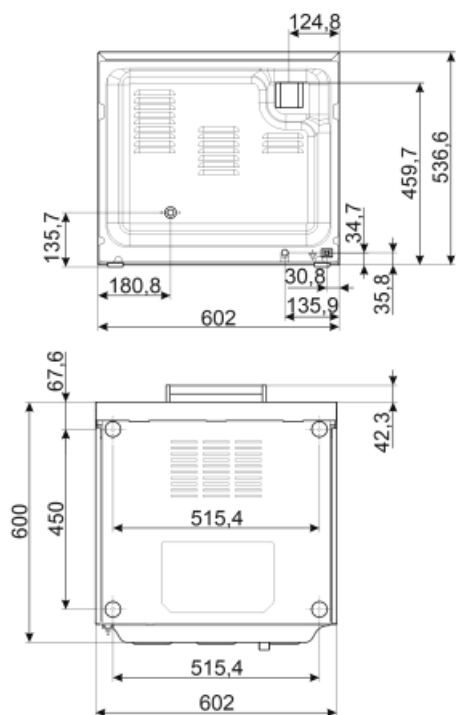

---

## Not included accessories

---




**3820**

Flat aluminised steel tray (4pcs)



**4730**

External tank kit 5 lt.



**3780**

Flat non-stick trays (4pcs)



**3755**

Flat perforated aluminium tray (4pcs)



**3926**

Air flow reducer kit for ALFA43 ovens

---

## Symbols glossary (TT)

---



Double speed fan



Fan forced heating



Fan forced heating with humidity injection