

# ALFA43XMFDS



<b>Family</b>	Professional ovens
<b>Subfamily</b>	Multifunction oven 4 trays 435x320 mm
<b>Power supply</b>	Electric
<b>Oven type</b>	Convection multifunction oven
<b>Oven control</b>	Manual
<b>Trays capacity</b>	4 trays 435x320 mm
<b>Power supply</b>	230 V~ / 13 A / 3,0 kW / 50 Hz
<b>Program storage with application</b>	Not available
<b>Adjustable feet</b>	Yes
<b>Product dimensions (WxDxH)</b>	602x580x537 mm
<b>Maximum depth with open door</b>	993 mm



## Target

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Butcher shops / Delicatessens; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	--

## Aesthetics

<b>Door with stainless steel stripes</b>	Yes	<b>Front panel Series</b>	Yes Alfa
<b>Colour</b>	Stainless steel		

## Controls

<b>Timer setting range</b>	1-60 minutes + endless
----------------------------	------------------------

## Accessories included

<b>Aluminized tray 3820</b>	kit of 4 pieces
-----------------------------	-----------------

## Electrical Connection


<b>Plug</b>	(F;E) Schuko
-------------	--------------

## Construction

<b>Oven materials</b>	Stainless steel / glass / plastics	<b>Motor rpm in low speed</b>	2100 rpm
<b>Cavity dimensions (WxDxH)</b>	460x360x425 mm	<b>Exhaust position</b>	Back
<b>Cavity material</b>	Ever Clean enamel	<b>Timer type</b>	Electric
<b>Shelves number</b>	4	<b>Temperature range</b>	50-270°C
<b>Tray frame support</b>	Chromed wire	<b>End cooking signal</b>	Yes
<b>Shelves distance</b>	80 mm	<b>Orange light indicator for t° achievement</b>	Yes
<b>Door construction</b>	Triple glass	<b>Green light indicator time achievement</b>	Yes
<b>Door opening</b>	Tilting	<b>Manual reset safety thermostat</b>	Yes
<b>Handle type</b>	Fixed	<b>Removable deflector</b>	Yes
<b>Glass</b>	Openable with clip	<b>Lighting</b>	1 Halogen lamp
<b>Fan type and number</b>	Fan with fixed rotation	<b>Light power</b>	40 W
<b>Fan motor power</b>	80 W	<b>Power cable length</b>	115 cm
<b>Engine rpm</b>	Dual speed	<b>Back panel</b>	Galvanized
<b>Motor rpm in standard speed</b>	2700 rpm	<b>IPX protection</b>	IPX3

## Logistic Information


<b>Packed product dimensions (WxDxH)</b>	625x695x610 mm	<b>Net weight</b>	36,100 kg
<b>EAN code</b>	8017709305932	<b>Gross weight</b>	38,200 kg

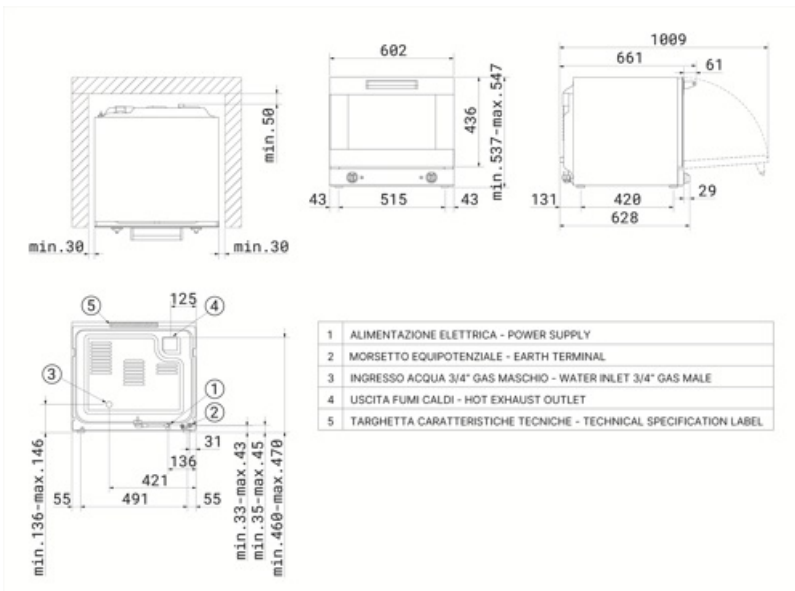

---

## Compatible Accessories

---



### 3820

Kit of 4 aluminum-coated sheet metal trays 435×320 mm




### RUTVL

Set of 4 wheels, fits all professional oven tables



### TVL40

8-level tray holder rack for ALFA43 ovens, dim. (WxDxH) 600×600×900 mm (height with kit RUTVL: 998 mm)



### 3900

Kit of 4 chrome wire grids 435×320 mm









### SVRPP43

Connection kit for stacking two 4l tray 435×320 mm ovens

## Symbols glossary

---

	Electric		Double speed fan
	Fan with lower element		Fan forced heating
	Large grill heating element		Static heating with upper and lower elements.

## Benefit (TT)

---

### **Mechanical control panel**

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released.

In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

### **Clip-open**

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

### **Two-speed fan**

Perfect ventilation for the ideal cooking of the most delicate dishes

The fan speed adjustment function allows you to tailor the ventilation intensity to the specific needs of each dish, ensuring consistently flawless results. Thanks to the dual-speed setting, you can create the perfect conditions for delicate preparations such as meringues, profiteroles, and soufflés, enveloping them in a gentler, more even airflow that preserves their lightness and structure.