

ALFA43XMFHDS

Family	Professional ovens
Subfamily	Multifunction oven 4 trays 435x320 mm
Oven type	Multifunction convection oven with humidifier
Oven control	Manual
Trays capacity	4 trays 435x320 mm
Power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Program storage with application	Not available
Maximum depth with open door	993 mm
Adjustable feet	Yes
Net weight	36.400 kg
Product dimensions WxDxH	602x580x537 mm
EAN code	8017709305949



Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail
------------------	-------------------------------------------------------------------------------------------------------------------------

Aesthetics






Colour	Stainless steel	Front panel Logo	Yes Smeg printed
Door with stainless steel stripes	Yes		

Controls

Timer setting range	1-60 minutes + endless
----------------------------	------------------------

Programme / Functions

Backing functions

 Convection	 Convection with humidification	 Up & base
 Fan assisted base	 Large grill	

Adjustable fan speed



Double speed fan

Accessories Included



Aluminized tray 3820 kit of 4 pieces

Electrical Connection

Plug (F;E) Schuko

Construction

Oven materials	Stainless steel / glass / plastics	Motor rpm in low speed	2100 rpm
Cavity dimensions (wxdxh)	460x360x425 mm	Exhaust position	Back
Cavity material	Ever Clean enamel	Timer type	Electric
Shelves number	4	Temperature range	50-250°C
Tray frame support	Chromed wire	End cooking signal	Yes
Shelves distance	80 mm	Orange light indicator t° achievement	Yes
Door construction	Triple glass	Green light indicator time achievement	Yes
Door opening	Tilting	Manual reset safety thermostat	Yes
Handle type	Fixed	Removable deflector	Yes
Glass	With clip	Lighting	1 Halogen lamp
Fan type and number	Fan with fixed rotation	Light power	40 W
Fan motor power	Dual speed	Power cable length	115 cm
Engine rpm	Single speed	Back panel	Galvanized
Motor rpm in standard speed	2700 rpm	IPX protection	IPX3

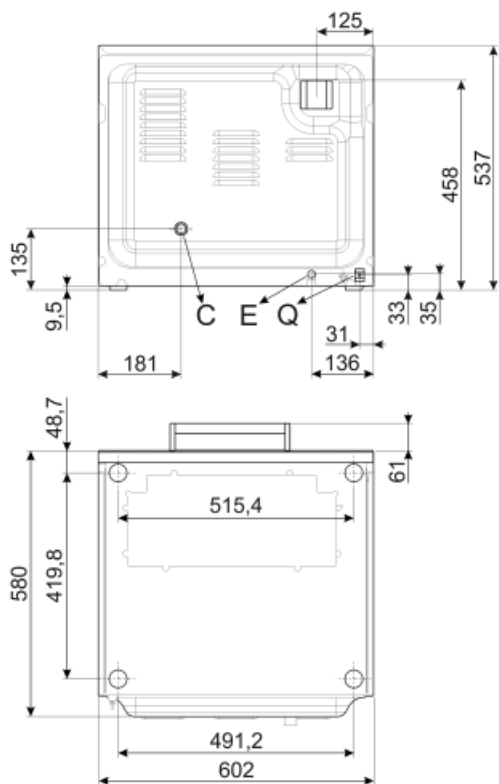

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO (solo su alcuni modelli) FILLER HOSE (on some models only)

Not included accessories



3820
Flat aluminised steel tray (4pcs)



3900
Flat chrome-plated wire grid (4pcs)

Symbols glossary (TT)



Fan with lower element



Fan forced heating



Fan forced heating with humidity injection



Large grill heating element



Static heating with upper and lower elements



Double speed fan