

## **ALFA43XUK**



Product Family Ovens

Subfamily Convection oven 4 trays 435x320 mm

Power supply Electric

Oven type Convection oven
Oven controls Mechanical

Tray capacity 4 trays 435x320 mm

Default power supply  $230 \text{ V} \sim / 12 \text{ A} / 2,75 \text{ kW} / 50 \text{ Hz}$ 

Not available

App for recipe development and

upload

Adjustable feet Yes

Product dimensions WxDxH 602x580x537 mm

Maximum depth with open door 993 mm



### **Target**

Industries Bar / Cafeterias / Bistros /

Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Butcher shops / Delicatessens; Catering; Care facilities; Commercial food services; Grocery shops / Food retail

#### **Aesthetics**

Door with stainless

steel strip

Yes

Logo Series Smeg printed

Alfa

Colour Front panel

Yes

Stainless steel

#### **Controls**

Adjustable timer 1-60 minutes + continuous

## **Options**

Other versions ALFA43UK version with

English plug; ALFA43K version 60Hz; ALFA43KSA version 60Hz with English Condense hood

Restaurants/Catering

plug



### **Accessories Included**

Flat aluminium tray

4 x trays

3820

#### **Electrical Connection**

(G) UK e Singapore Plug


#### Construction

**Stainless** Max motor speed (rpm) 2700 rpm Oven material steel/glass/plastics Exhaust exit Back **Cavity dimensions** 460x360x425mm Time adjustment Electromechanical timer (WxDxH) 50-250°C Temperature range Internal net volume 54.5 lt End of cooking alarm Yes Cavity material Easy clean enamel Orange light indicator Yes No. of shelves when to achieved Tray support frame Chrome Green light indicator Yes Distance between 80 mm when time achieved shelves Manual safety Yes **Door construction** Yes thermostat reset Door opening Drop down Removable deflector Yes No. of lights 1 Halogen light Handle type Smeg Inner glass Removable Light power 40 W 115 cm Fan type and number Power cable length Fan motor power Back panel Galvanized Double speed Fan speed Single speed **IPX** protection Scheduled start H/12

### **Logistic Information**

Net weight (kg) 32.500 kg Height (mm) packed 610 mm Packed width 625 mm 34.600 kg Gross weight (kg) 695 mm Dimensions of the 610x625x695 mm Packaged depth packed product (mm)



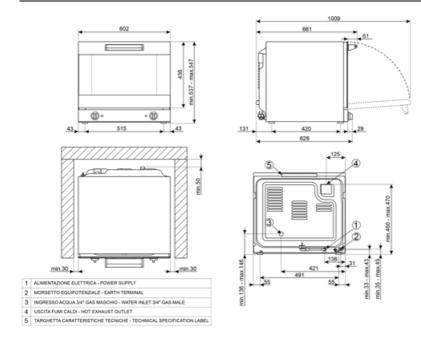



## **Compatible Accessories**



#### 3755

Flat perforated aluminium tray



#### 3780

Flat non-stick trays



Flat chrome-plated wire grid (4pcs)



#### 3926

Air flow reducer kit



#### **RUTVL**

Wheels kit for all oven table models (4pcs)



#### TVL40

Oven stand for 8 trays - 600x600x900/950mm



# Symbols glossary



Electric



Fan forced



#### **Benefit**

#### Mechanical control panel

Ease of use and effortless control of the essential cooking parameters

The control panel, equipped with practical knobs, allows for simple, intuitive, and effortless management of the main functions. Using the buttons, you can adjust the cooking time, temperature, and, in selected models, the level of humidification. By turning the knob to position 1, steam will be delivered until it is released. In multifunction ovens with a mechanical control panel, there is also a dedicated button for selecting different oven functions based on the desired cooking mode.

#### Clip-open

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.