

ALFA625E1HDSR

Family	Professional ovens
Subfamily	Convection oven 6 trays en 600x400 mm or GN1/1
Oven type	Convection oven with humidification
Oven control	Electronic
Trays capacity	6 trays EN 600x400 mm or GN1/1 (excluding flat trays and grids)
Power supply	400 V 3N~ / 16 A / 10,5 kW / 50-60 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1521 mm
Adjustable feet	Yes
Net weight	76,000 kg
Product dimensions WxDxH	798x757x793 mm



Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail	Suggested for	Bakery
-----------	---	---------------	--------

Aesthetics

Colour	Stainless steel	Digit display color	White
Door with stainless steel stripes	Yes	Front panel	Yes
Display type	Digital TFT	Logo	Smeg printed

Controls

Storable programs number	100	Chimney regulation	Yes
Timer setting range	1-60 minutes + endless	HACCP data	Yes
Cooking steps	3 + pre-heating		

Programme / Functions

Backing functions



Convection



Convection with humidification



Core probe



Core probe + Δt

Adjustable fan speed



Double speed fan

Options

Right hand hinge


Yes

Combinable hood


K4610X

Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
Cavity dimensions (wxdxh)	672x437x546 mm	Humidification levels	5 + manual
Gross volume	184,8 lt	Exhaust position	Back
Net volume	165,6 lt	Components cooling system	Yes
Internal net volume	127,3 lt	Timer type	Electrical
Cavity material	Stainless steel	Temperature range	50-280°C
Shelves number	6	End cooking signal	Yes
Tray frame support	Chromed wire	Safety switch with open door	Yes
Shelves distance	77 mm	Manual reset safety thermostat	Yes
Door construction	Double glass	Predisposition for core probe	Yes
Door opening	Lateral - right hinge	Removable deflector	Yes
Handle type	Rotating	Lighting	2 LED lamps
Glass	Openable with hinge	Light power	40 W
Fan type and number	2 contrarotating with timed direction reversal	USB port	Yes
Fan motor power	200W	Water load pipe	Yes
Engine rpm	Dual speed	Power cable length	170 cm
Motor rpm in standard speed	2850 rpm	Back panel	Galvanized
Motor rpm in low speed	1450 rpm	IPX protection	IPX3

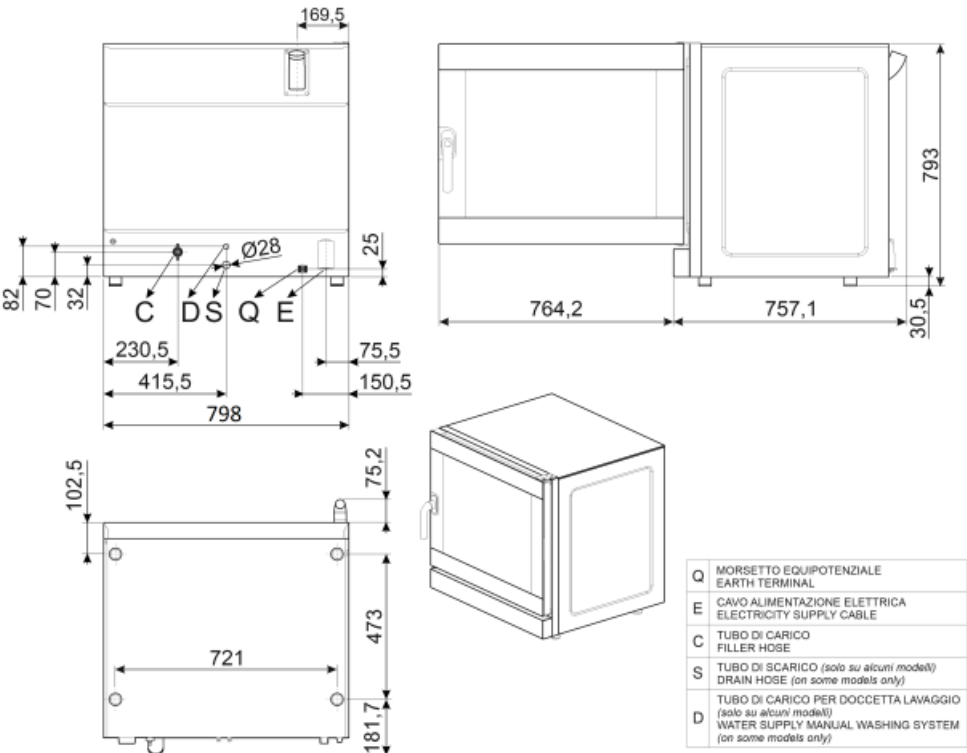

Not included accessories



TF11XH2

Perforated aluminium GN1/1 tray



T11XH20

2cm height aluminium GN1/1 tray



T11TH20

2cm height GN1/1 non-stick tray


KITSC

Core temperature probe for EHDS models



T8S11T

8 holes GN 1/1 non-sticking tray




TMF11TH2

GN 1/1 non-sticking microperforated tray




T11XH65

6,5cm height aluminium GN1/1 tray



G11X8P

8 vertical GN1/1 chicken grid



G11T

Non-stick GN1/1 tray



T11TH40

4cm height GN1/1 non-stick tray

Symbols glossary (TT)



Core probe



Core probe baking by temperature difference (Δt)



Double speed fan



Fan forced heating



Fan forced heating with humidity injection