

ALFA625H-2

Product Family Ovens

Subfamily Convection oven 6 trays en 600x400

mm or GN1/1

Not available

1521 mm

Fan with humidification Oven type

Oven controls Mechanical

6 trays 600x400 mm - GN1/1 Tray capacity Default power supply 400 V 3N~ / 16 A / 10,5 kW / 50-60

Steam technology Direct

App for recipe development and

Maximum depth with open door

upload

Adjustable feet Yes

Net weight (kg) 76.000 kg

Product dimensions WxDxH 798x757x793 mm



Target

Bars/Cafes; Hotels; Bars/Cafes Potential users Suggested for

> Restaurants/Catering; Bakery/Pastry making; Industrial pastry & bakery test kitchen; Butcher's

shops

Aesthetics

Colour Stainless steel

Door with stainless

steel strip

Yes

Front panel

Logo

Yes


Smeg printed

Controls

Adjustable timer 1-60 minutes + continuous Adjustable chimney Manual

Programs / Functions

Cooking functions





Fan assisted with humidification

SMEG SPA 05/05/2024



Options

Right hand hinge ALFA625HR-2 Condense hood Right hand hinge ALFA1035EHDSR

K4610X

Construction

Oven materialStainless
steel/glass/plasticsHumidification system
on each fanYesCavity dimensions672x437x546mmSteam assisted levelsMar

Cavity dimensions 672x437x546mm Steam assisted levels Manual (WxDxH) Exhaust exit Back
Gross volume 460x360x425mm Time adjustment Electromechanical timer

Net volume 460x360x425mm Temperature range 50-270°C Internal net volume 127,3 lt End of cooking alarm Yes

Cavity materialStainless steelOrange light indicatorYesNo. of shelves6when t° achieved

Tray support frame Chrome Green light indicator Yes
Distance between 77 mm when time achieved
shelves Heating element Yes

shelves Heating element Yes

Door construction Yes interruption with open door

Door opening Lateral Manual safety Yes thermostat reset

Inner glass Openable
Fan type and number 2 contrarotating fans with

time direction reversal

Fan motor power

180W

No. of lights

2 LED lights

Light power

40 W

Water connection

Yes

Fan speed Single speed Water connection Yes


Max motor speed (rpm) 2 Power cable length Back panel Galvanized

IPX protection Scheduled start H/12

·

SMEG SPA 05/05/2024



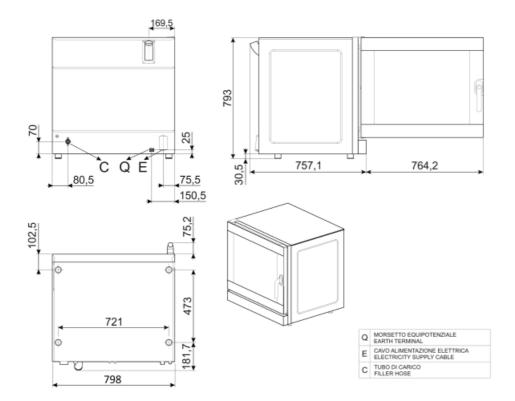

SMEG SPA 05/05/2024



Not included accessories



3805

Flat chrome-plated wire grid



3927

Air flow reducer kit



TF11XH2

Perforated aluminium GN1/1 tray for Galileo professional



3743

Flat aluminium tray



TMF11TH2

GN 1/1 non-sticking microperforated tray



SVRPP625

Conjunction kit for 2 ovens series 625/420 and hood



T11XH20

2cm height aluminium GN1/1 tray for Galileo professional



SVRPP420-625

Connector kit for two stacked ALFA420+420 or ALFA420+625 models and hood



T11XH65

6,5cm height aluminium GN1/1 tray for Galileo professional



T11TH20

2cm height GN1/1 non-stick tray for Galileo professional



RGN11-625-2



3751

Flat perforated aluminium tray



3810

Corrugated grid for baguettes



T8S11T

8 holes GN 1/1 non-sticking tray for Galileo professional



T11TH40

4cm height GN1/1 non-stick tray for Galileo professional

SMEG SPA 05/05/2024



Symbols glossary



Fan forced



Fan with humidification

SMEG SPA 05/05/2024