

ALFA625H-2

Family	Professional ovens
Subfamily	Convection oven 6 trays en 600x400 mm or GN1/1
Oven type	Convection oven with humidification
Oven control	Manual
Trays capacity	6 trays EN 600x400 mm or GN1/1 (excluding flat trays and grids)
Power supply	400 V 3N~ / 16 A / 10,5 kW / 50-60 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1521 mm
Adjustable feet	Yes
Net weight	76,000 kg
Product dimensions WxDxH	798x757x793 mm
EAN code	8017709270193



Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail	Suggested for	Bakery
------------------	---	----------------------	--------

Aesthetics

Colour	Stainless steel	Front panel	Yes
Door with stainless steel stripes	Yes	Logo	Smeg printed

Controls

Timer setting range	1-60 minutes + endless	Chimney regulation	Manual
----------------------------	------------------------	---------------------------	--------


Options

Right hand hinge	ALFA625HR-2	Combinable hood	K4610X
-------------------------	-------------	------------------------	--------


Construction

Oven materials	Stainless steel / glass / plastics	Water injection on each fan	Yes
-----------------------	------------------------------------	------------------------------------	-----

Cavity dimensions (wxdxh)	672x437x546 mm	Humidification levels	Manual
Gross volume	184,8 lt	Exhaust position	Back
Net volume	165,6 lt	Timer type	Electric
Internal net volume	127,3 lt	Temperature range	50-270°C
Cavity material	Stainless steel	End cooking signal	Yes
Shelves number	6	Orange light indicator t° achievement	Yes
Tray frame support	Chromed wire	Green light indicator time achievement	Yes
Shelves distance	77 mm GN1/1 - EN 600X400	Safety switch with open door	Yes
Door construction	Double glass	Manual reset safety thermostat	Yes
Door opening	Lateral - left hinge	Removable deflector	Yes
Handle type	Rotating	Lighting	2 LED lamps
Glass	Openable with hinge	Light power	40 W
Fan type and number	2 contrarotating with timed direction reversal	Water load pipe	Yes
Fan motor power	Progressive %	Power cable length	170 cm
Engine rpm	Single speed	Back panel	Galvanized
Motor rpm in standard speed	2850 rpm	IPX protection	IPX3

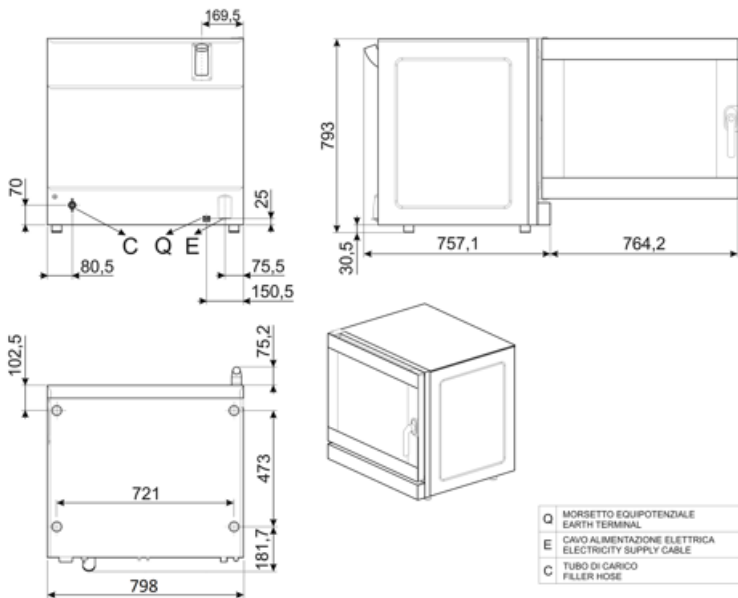

Not included accessories



3743
Flat aluminium tray (4pcs)



3751
Flat perforated aluminium tray (4pcs)




3805
Flat chrome-plated wire grid (4pcs)



3810
Waved grid for baguettes (4pcs)



3927
Air flow reducer kit for ovens ALFA410, 420, 625, 1035



RGN11-625-2
Support kit for grids or flat trays GN1/1 suitable for ALFA625 models



SVRPP420-625
Connector kit for two stacked ALFA420+420 or ALFA420+625 models and hood


SVRPP625
Connector kit for two stacked ALFA625 or ALFA625+ALFA420/425 models and hood



T11TH20
GN1/1 non-stick tray, 20 mm height




T11TH40
GN1/1 non-stick tray, 40 mm height




T11XH20
2cm height aluminium GN1/1 tray, 20 mm height



T11XH65
GN1/1 aluminium tray, 65 mm height



TF11XH2
Perforated aluminium GN1/1 tray, 20 mm height



TMF11TH2
GN 1/1 non-sticking microperforated tray, 20 mm height

Symbols glossary (TT)



Fan forced heating



Fan forced heating with humidity
injection