

CMSC45NE



Familie	Inbouw koffiemachine
Type	Automatisch
Categorie	45 cm compact



Design





Esthetiek	Linea	Type roestvrijstaal	Geborsteld
Kleur	Zwart	Logo	Geëtst
Afwerking	Glanzend		








Bediening



Display	White LCD on black background (2 lines)	Bedieningsknoppen	Linea
Aantal weergaven talen	13	Te verlichten bedieningsknoppen	Ja
Weergave taal	IT, GB, FR, NL, SP, PT, SWE, RU, DE, CZ, DK, GR, PL	Aantal knoppen	8
Type bediening	Bedieningsknoppen/-toetsen	Kleur toetsen	Rvs look
Aantal bedieningsknoppen	2		

Program / Functions

Koffiefunctie (één kopje)	
Koffiefunctie (twee kopjes)	
Infusiefunctie vóór het verwarmen	Ja
Heet water functie (voor bijv. thee)	
Gemalen bonen functie	

Instelbare koffie-intensiteit	
Instelbare waterhoeveelheid	
Intensiteit cappuccinoschuim	
Automatische inschakeling programmeerbaar	
Automatisch spoelen	
Automatisch ontkalken	
Instelbare koffietemperatuur	
Instelbare roestvrijstalen koffiemaler	Ja
Waterhardheid	Ja
Geen-water-signaal	Ja

Technische specificaties




Bonen reservoir	Ja	Opvangschaal	Ja
Gemalen koffiereservoir	Ja	Pompdruksysteem	15 bar
Uitneembaar waterreservoir	Ja	Inhoud waterreservoir	1.80 l
Afvalcontainer voor gebruikte koffie	Ja (14 enkele koffies, 7 dubbele koffies)	Koffiebonen reservoir	220 g
Koffietuit met hoogteverstelling	Ja	Verlichting	2
Stoom dispenser	Ja		

Elektrische aansluiting







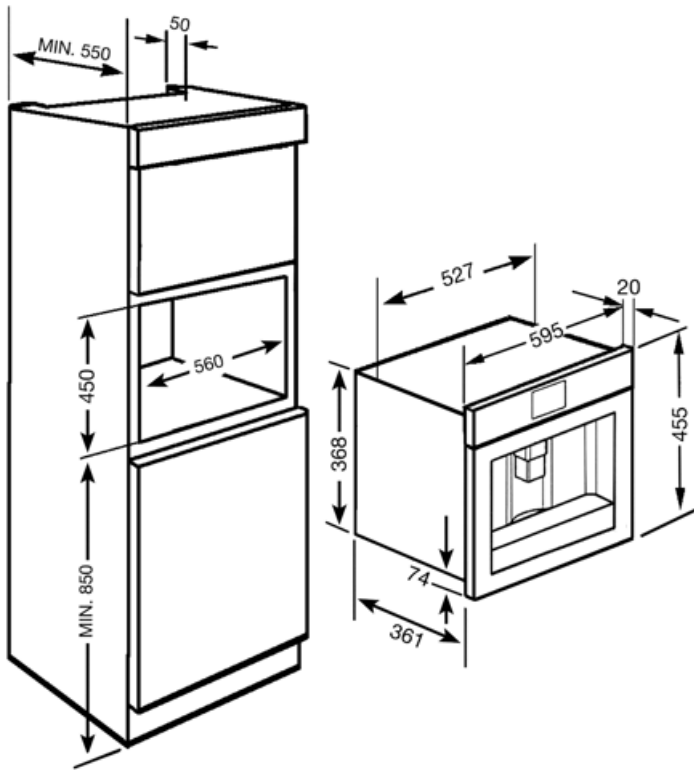










Aansluitwaarde	1350 W	Frequentie	50-60 Hz
Stroom	5,6 A	Lengte voedingskabel	180 cm
Spanning (V)	220-240 V		

Logistieke informatie

Breedte product	595 mm	Hoogte product	455 mm
Diepte product	415 mm		



Symbols glossary

-  Spoelen: er is een automatische spoeling met heet water wanneer de koffiemachine is ingeschakeld
-  Three levels adjustable coffee temperature to taste the coffee on the temperature desired.
-  Types of coffee: You can prepare the following types of coffee: Ristretto-Corto (small portion) / Normale (medium portion) / Lungo (large portion)
-  The double coffee function makes possible to prepare two espresso at the same time with just one infusion cycle.
-  Ontkalkingsfunctie: Is essentieel om overtollige kalksteenafzetting in de tank te verwijderen en de goede werking van het product mogelijk te maken. De noodzaak om deze handeling uit te voeren, wordt door het product zelf aangegeven.
-  Ground coffee: You can use ground coffee or coffee beans in the coffee machine with the possibility to adjust the coarseness of grind.
-  Hot water: Coffee machine can make hot water for tea or other hot drinks
-  Illuminated controls: are a safety device to alert the user that the appliance is on as well as being a stunning design feature.
-  The milk froth is adjustable through the thermal carafe knob.
-  Automatische inschakeling: Het is mogelijk om de automatische inschakeling van de machine te programmeren om deze op de gewenste tijd gebruiksklaar te maken
-  Semiprofessional steamer with a dedicated heating element to manage the steam outlet. Suitable for recipes such as hot chocolate, punch, bombardino, vin brulé.
-  Types of coffee: You can prepare the following types of coffee: Ristretto-Corto (small portion) / Normale (medium portion) / Lungo (large portion)
-  Coffee beans: You can use coffee beans in the coffee machine with the possibility to adjust the coarseness of grind.
-  LCD-display: om de prestaties te optimaliseren en het gebruik van het apparaat te vereenvoudigen.
-  Compact appliances with a height of 45 cm - perfect solution to meet the functional requirements of kitchen sets of small height. Available in several types and in different styles.
-  5 levels adjustable coffee intensity. This function makes possible to adjust the quantity of beans grounded in any infusion cycle.
-  verlichting