

CPV615NR

Product Family	Drawer
Commercial height	14 cm
Type	Sous-vide
Vitality system	Yes







Aesthetics

Aesthetic	Dolce Stil Novo	Glass type	Eclipse
Colour	Black	Front panel	With horizontal strip
Finishing	Glossy black	Logo	Silk screen
Component finishing	Copper	Logo position	Inside
Material	Glass		







Controls

Type of control setting	Touch control
-------------------------	---------------

Programs / Functions

Preservation cycle	
Vacuum in container cycle	
Chef function	
Welding	

Technical Features

						
Opening mechanism	Push-pull	Safety solenoid valve	anti oil reflux	Yes		
Base material	Stainless steel 304					
Lid material	Tempered glass with frame					


Lid opening	65° +/- 3°	Dehumidification pump cycle	Yes, automatic
Drawer stabilisation device	Yes	Enabling vacuum bar lenght	260 mm
Drawer maximum protrusion	453 +/- 2 mm	Removable enabling vacuum bar	Yes
Max weight allowance	15 kg	Welding type	Double-phase
Maximum drawer loading weight	48 kg	Preservation cycle duration	1' - 1'20"
Capacity	6,5 l	Reachable vacuum	2-10 millibar (99,9%)
Pump flow	4 m ³ /h	Vacuum sensor	Yes, accuracy 10 mbar
		Accessories included	20x30 V-bags, 25x35 V-Bags

Electrical Connection

Plug	(F;E) Schuko	Voltage (V)	220-240 V
Nominal power	240 W	Frequency (Hz)	50-60 Hz
Current	1 A		

Logistic Information

Width (mm)	597 mm	Product Height (mm)	135 mm
Depth (mm)	570 mm		

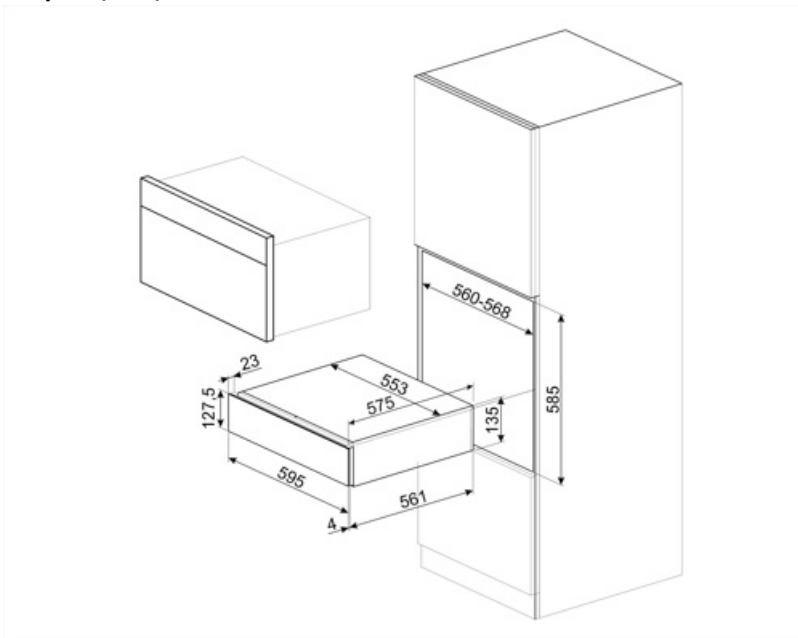

Compatible Accessories




LIFEBOX

Set of 3 containers for vacuum drawer



VBAG1











Bags for sous-vide cooking and preservation, 20x30, 50 pieces



VBAG2

Bags for sous-vide cooking and preservation, 25x35, 50 pieces

Symbols glossary

- | | | | |
|--|---|---|--|
|  | The Chef function alternates compression and decompression cycles and speeds up some operations, such as marinade or infusion, that otherwise would require a lot of time. |  | Preservation vacuum bags. These bags endure temperatures from -25°C to 70°C (for 2 hours) or 100°C (for 15 minutes). Suitable for pantry, refrigerator and freezer storage, they cannot be used for vacuum cooking. |
|  | The vacuum in bag function guarantees to create vacuum into bags choosing among three levels. It is also possible to set the 0 level to seal the bag without creating the vacuum. |  | The stabilization device maintains the drawer open when used, avoiding closing it accidentally. |
|  | Sous-vide cooking bags. These bags endure a maximum temperature of 85°C (for 75 hours), 100°C (for 4 hours) or 121°C (for 30 minutes). Suitable for pantry and refrigerator storage, they cannot be storage in the freezer. |  | The vacuum in container function guarantees to create vacuum into glass or plastic containers choosing among three different levels. Use only certificate containers suitable for vacuum and able to resist to a 99,9% vacuum. |
|  | Setting the highest vacuum in bag/container level, it is reached a 99,9% vacuum. |  | The vacuum sensor guarantees the achievement of the maximum vacuum connected to the level set. If the value is not reached, the bag is not sealed. |
|  | The machine can be set at three different sealing levels. Setting the maximum level is possible to seal more bags at the same time with a unique cycle. |  | The machine carries out a double phase welding which guarantees to seal dirty and oily bags as well. |

Benefit (TT)

Push-pull door opening

With a simple push, the drawer opens and then closes again by pushing it back.

Preservation cycle

3 preservation cycles (delicate, preservation, sous vide)

Vacuum in container cycle

3 vacuum levels (delicate, medium, strong)

Chef function

Perfect marinades and infusions thanks to Chef mode

Vitality System

The combined use of the steam oven, blast chiller and vacuum drawer allows the preservation of product characteristics and maximum flavour enhancement