

## CVI329X3



|                 |                |
|-----------------|----------------|
| Product Family  | Wine Cooler    |
| Installation    | Built-in       |
| Built-In Niche  | 60 cm          |
| Defrost         | Automatic      |
| Cooling type    | Fan assisted   |
| Hinge type      | Variable hinge |
| Hinge position  | Right          |
| Reversible door | Yes            |



### Wine cooler compartment features



|   |                           |
|---|---------------------------|
| Number of fixed shelves                     | 1                         |
| Number of removable shelves                 | 2                         |
| No. of lights                               | 2                         |
| Shelves material                            | Wood                      |
| Removable shelves on telescopic guide rails | Yes                       |
| Type of internal light                      | LED                       |
| Air filter                                  | Activated charcoal filter |

### Programs / Functions



|                   |                                      |                    |                     |
|-------------------|--------------------------------------|--------------------|---------------------|
| Control setting   | Touch control                        | Control lock       | Yes                 |
| Controls          | Internal, in the compartment         | Lighting forced ON | In a maximum period |
| Display           | LED                                  | Fan forced ON      | Yes                 |
| Functions display | Temperature alarm, Temperature value | Temperature Alarm  | Yes                 |
| Power on lamp     | Yes                                  | Door open alarm    | Yes                 |

### Technical Features

|                              |   |                       |                          |
|------------------------------|---|-----------------------|--------------------------|
| Adjustable temperature zones | 2 | Number of compressors | 1                        |
|                              |   | Compressor type       | Low vibration compressor |
|                              |   | Refrigerant gas type  | R600a                    |


|                                    |            |  |                       |
|------------------------------------|------------|--|-----------------------|
| <b>Independent cooling systems</b> | 1          | <b>Refrigerant Quantity (gr)</b>             | 20 g                  |
| <b>Number of door glasses</b>      | 2          | <b>Foam agent</b>                            | HFO                   |
| <b>Temperature range</b>           | 5-20 °C    | <b>Metal panel on the back of the fridge</b> | Metal                 |
| <b>Type of temperature control</b> | Electronic | <b>Door opening type</b>                     | With push pull system |
| <b>Anti-UV door glass</b>          | Yes        |  |                       |
| <b>Integrated heating element</b>  | Yes        |  |                       |

## Performance / Energy Label NEW





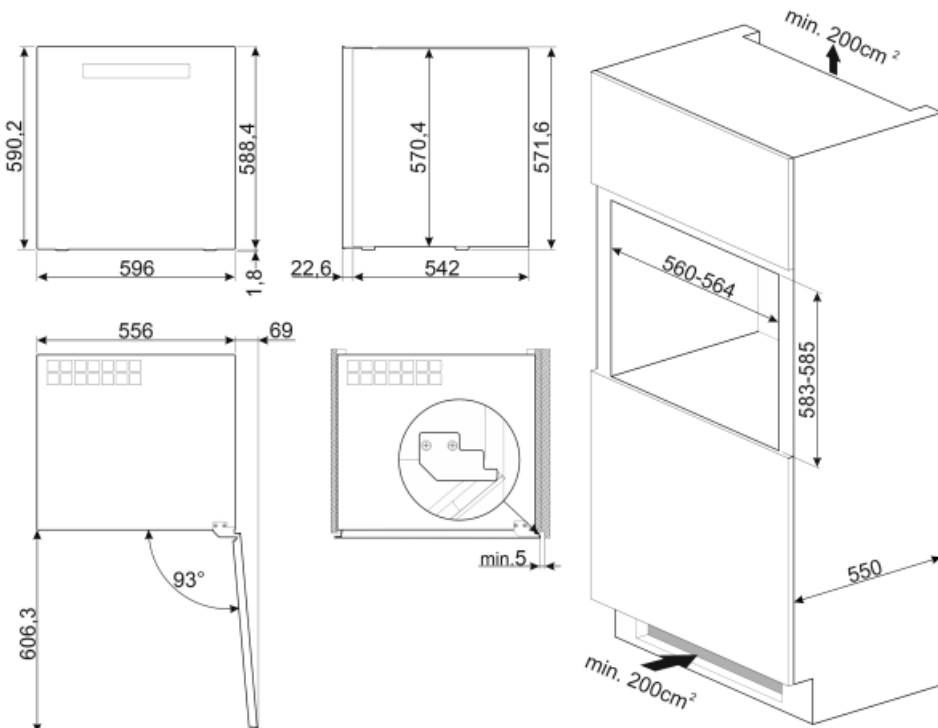


|   |              |   |                  |
|---|--------------|---|------------------|
|   |              |   |                  |
| <b>Max Capacity (bottles 0,75lt)</b>            | 29           | <b>Sum of the volumes of the chill compartment(s) and the unfrozen compartment(s)</b> | 79 l             |
| <b>Annual energy consumption</b>                | 140 kWh/year | <b>Climatic class</b>   | SN, N, ST        |
| <b>Energy efficiency class</b>                  | G            | <b>EEL</b>  | 170 %            |
| <b>Airborne acoustical noise emission class</b> | C            | <b>Noise level</b>  | 38 dB(A) re 1 pW |
| <b>Total volume</b>                             | 79 l         |   |                  |

## Electrical Connection

|                      |              |                                  |           |
|----------------------|--------------|----------------------------------|-----------|
| <b>Plug</b>          | (F;E) Schuko | <b>Voltage (V)</b>               | 220-240 V |
| <b>Nominal power</b> | 40 W         | <b>Frequency (Hz)</b>            | 50 Hz     |
| <b>Current</b>       | 0,4 A        | <b>Power supply cable length</b> | 180 cm    |



## Symbols glossary

-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  LED display: to show programmes, functions and options selected and the time to the end of the cycle.
-  LED interior lighting: is a more energy efficient and long lasting way of illuminating the interior of the appliance.
-  Energy efficiency class G
-  The automatic defrost system works by automatically defrosting at regular intervals eliminating the need to defrost altogether.
-  Ventilated: Forced distribution of cold air in the refrigerator compartment, which allows even temperature distribution within the fridge.
-  Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.