

CVIU338RX



| | |
|----------------|--------------|
| Family | Wine Cooler |
| Installation | Built-in |
| Built-In Niche | 82-87 cm |
| Defrost | Automatic |
| Cooling type | Fan assisted |
| Hinge type | Standard |
| Hinge position | Right |



Wine cellar compartment features



| | |
|---|---------------------------|
| Number of fixed shelves | 2 |
| Number of removable shelves | 3 |
| Shelves material | Wood |
| Removable shelves on telescopic guide rails | Yes |
| Type of internal light | Led |
| Air filter | Activated charcoal filter |

Programs/Functions



| | | | |
|-------------------|---|--------------------|---------------------|
| Control setting | Touch control | Control lock | Yes |
| Controls | External, in the door | Lighting forced ON | In a maximum period |
| Display | LED | Fan forced ON | Yes |
| Functions display | Temperature alarm, Temperature value | Temperature Alarm | Yes |
| Power on lamp | Yes | Door open alarm | Yes |

Technical Features

| | | | |
|------------------------------|---|---------------------------|--------------------------|
| Adjustable temperature zones | 2 | Compressor type | Low vibration compressor |
| Independent cooling systems | 2 | Refrigerant gas type | R600a |
| Number of door glasses | 2 | Refrigerant Quantity (gr) | 26.5 oz |
| | | Foam agent | Cyclopentane |


| | | | |
|-----------------------------|------------|---------------------------------------|------------------|
| Temperature range | 5-20 °C | Metal panel on the back of the fridge | Metal |
| Type of temperature control | Electronic | Adjustable feet | 2 Front + 2 Rear |
| Anti-UV door glass | Yes | Door opening type | With handle |
| Integrated heating element | Yes | | |
| Number of compressors | 1 | | |

Performance / Energy Label - Reg. 2019

| | |
|-------------|------------------|
| Noise level | 43 dB(A) re 1 pW |
|-------------|------------------|

Electrical Connection

| | | | |
|------------------------------|-------------------|---------------------------|-----------|
| Plug | (A) USA e Messico | Voltage (V) | 120 V |
| Electrical connection rating | 40 W | Frequency (Hz) | 50/60 Hz |
| Current | 1,95 A | Power supply cable length | 59 1/16 " |

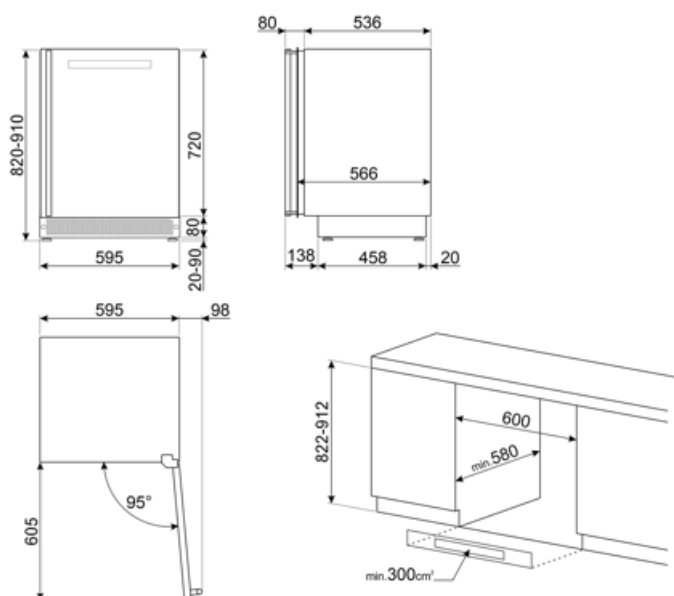

Symbols glossary



The automatic defrost system works by automatically defrosting at regular intervals eliminating the need to defrost altogether.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.



Built-in niche



A: Product drying performance, measured from A+++ to D / G depending on the product family



Ventilated: Forced distribution of cold air in the refrigerator compartment, which allows even temperature distribution within the fridge.



LED interior lighting: is a more energy efficient and long lasting way of illuminating the interior of the appliance.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.

Benefit (TT)

External handle

Handle with sober and elegant aesthetics, for easy door opening

UV-protected door glass

The UV-protected door glass protects the bottles from the passage of light into the wine cooler for impeccable storage

LED lights

LED lights ensure perfect multi-level visibility inside the wine cooler

Activated charcoal air filter

The activated charcoal air filter ensures excellent quality of the air and is easy to maintain

Touch Display

Touch display for an easy and accurate temperature management inside the refrigerated compartment

Low-vibration compressor

The low-vibration compressor avoids exposing the bottles to prolonged vibrations, which could compromise the quality of the wine

Telescopic guides

Telescopic sliding guides for easy extraction of wine bottles