

CVIU338RX1



| | |
|-----------------------|--------------|
| Installation | Built-in |
| Built-In Niche | 82-87 cm |
| Defrost | Automatic |
| Cooling type | Fan assisted |
| Hinge type | Standard |
| Hinge position | Right |



Wine cellar compartment features



| | |
|--|---------------------------|
| Number of fixed shelves | 2 |
| Number of removable shelves | 3 |
| Shelves material | Wood |
| Removable shelves on telescopic guide rails | Yes |
| Type of internal light | Led |
| Air filter | Activated charcoal filter |

Programs/Functions



| | | | |
|--------------------------|--------------------------------------|---------------------------|---------------------|
| Control setting | Touch control | Control lock | Yes |
| Controls | Inner, in the cellar compartment | Lighting forced ON | In a maximum period |
| Display | LED | Fan forced ON | Yes |
| Functions display | Temperature alarm, Temperature value | Temperature Alarm | Yes |
| Power on lamp | Yes | Door open alarm | Yes |

Technical Features

| | | | |
|-------------------------------------|---|----------------------------------|--------------------------|
| Adjustable temperature zones | 2 | Compressor type | Low vibration compressor |
| Independent cooling systems | 2 | Refrigerant gas type | R600a |
| Number of door glasses | 2 | Refrigerant Quantity (gr) | 0.7 oz |


| | | | |
|-----------------------------|------------|---------------------------------------|------------------|
| Temperature range | 5-20 °C | Foam agent | HFO |
| Type of temperature control | Electronic | Metal panel on the back of the fridge | Metal |
| Anti-UV door glass | Yes | Adjustable feet | 2 Front + 2 Rear |
| Integrated heating element | Yes | Door opening type | With handle |
| Number of compressors | 1 | | |

Performance / Energy Label - Reg. 2019

| | | | |
|--|--------------|--|-----------|
| Max Capacity (bottles 0,75lt) | 38 | Sum of the volumes of the frozen compartment(s) | 0.0 gal |
| Annual energy consumption | 130 kWh/year | Sum of the volumes of the chill compartment(s) and the unfrozen compartment(s) | 30.6 gal |
| Airborne acoustical noise emission class | C | Climate class | SN, N, ST |
| Total net volume | 30.6 gal | EI | 153 % |

Electrical Connection

| | | | |
|------------------------------|-------|---------------------------|----------------|
| Electrical connection rating | 40 W | Frequency (Hz) | 50/60 Hz |
| Current | 0,4 A | Power supply cable length | 70 7/8 " |
| Voltage (V) | 115 V | Plug | (B) NEMA 5-15P |

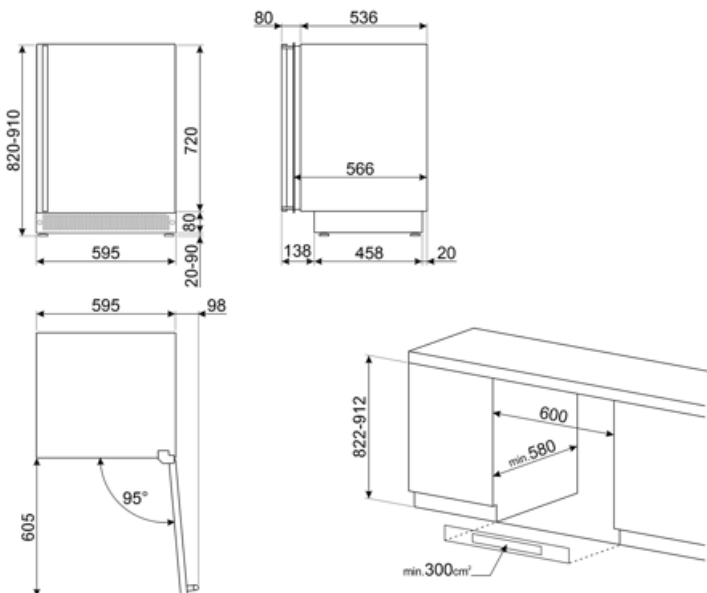








Alternative products



CVIU138RG1

Colour: Neptune Grey

Symbols glossary

- | | | | |
|--|--|---|--|
|  | The automatic defrost system works by automatically defrosting at regular intervals eliminating the need to defrost altogether. |  | LED display: to show programmes, functions and options selected and the time to the end of the cycle. |
|  | Ventilated: Forced distribution of cold air in the refrigerator compartment, which allows even temperature distribution within the fridge. |  | Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new. |
|  | LED interior lighting: is a more energy efficient and long lasting way of illuminating the interior of the appliance. |  | Built-in niche |
|  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button. | | |