

# DF345CQSX



Product Family	Dishwashers
Width	60 cm
Commercial height	85 cm
Installation	Free-standing
N° baskets	3, Flexi
Motor	Inverter 2.0
EAN code	8017709335984




## Programs / Functions



No. of programmes	8	ECO	Yes
Washing temperatures	50, 60, 65, 70 °C	Mix	Yes
Soak	Yes	Intense 60°	Yes
Full express - 60 minutes	Yes	Auto 50°-60°	Yes
Express 50°	Yes		

## Options



Delay timer option	Up to 24 hours, with automatic soak	Crystal option	Yes
Extreme option	Yes	Sterilise option	Yes

## Baskets

Basket colour	Grey	Height adjustment of the upper basket	On two levels (4 cm)
Basket components colour	Grey	Largest loadable dish in upper basket	20,0 cm
Handle	In plastic with stainless steel insert on upper and lower basket	Lower Basket	With 4 foldable racks
Upper Basket	With 3 foldable racks	Largest loadable dish in lower basket	31.0 cm
Glass holder	Yes	Colour Inner Components	Grey

## Technical Features



Width (mm)	598 mm	Water softener	With electronic setting
Depth (mm)	600 mm	Turbidity sensor	Yes
Display type	LED display	Aquatest	
Product Height (mm)	848 mm	Flood protection system	Total Acquastop
Controls	Electronic	Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Display	Delayed start, Programme time indicator, Time to end indication	Max water hardness	90°FH; 50°dH
Programme graphics	Symbols	Drying system	Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
Salt light indicator	Light	Tank material	Stainless steel
Rinse aid indicator	Light	Filter	Stainless steel
Progress indicator	Yes	Concealed heating element	Yes
End of cycle indicator	On display, with acoustic signal	Hinges	Self balancing with fixed hinges
Washing system	Orbital	Adjustable feet	Just for levelling
Third spray arm	Single	Depth of dishwasher with open door (mm)	1168
		Top cover	In plastic


## Performance / Energy Label NEW



Energy Efficiency Class (Washing cycle)	C	Programme duration	4:00 h:min
Energy consumption [per 100 cycles, based on the eco programme]	75 KWh	Airborne acoustical noise emissions (spinning phase)	44 dB(A) re 1 pW
Rated capacity (ps)	14	Airborne acoustical noise emission class	B
Water consumption [per cycle]	11.0 litres	Energy efficiency Index (EEI) (Washing cycle)	43.9

## Electrical Connection

Plug	(G) UK e Singapore	Frequency (Hz)	50 Hz
Connected power	1950 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	150 cm
Voltage	220-240 V		

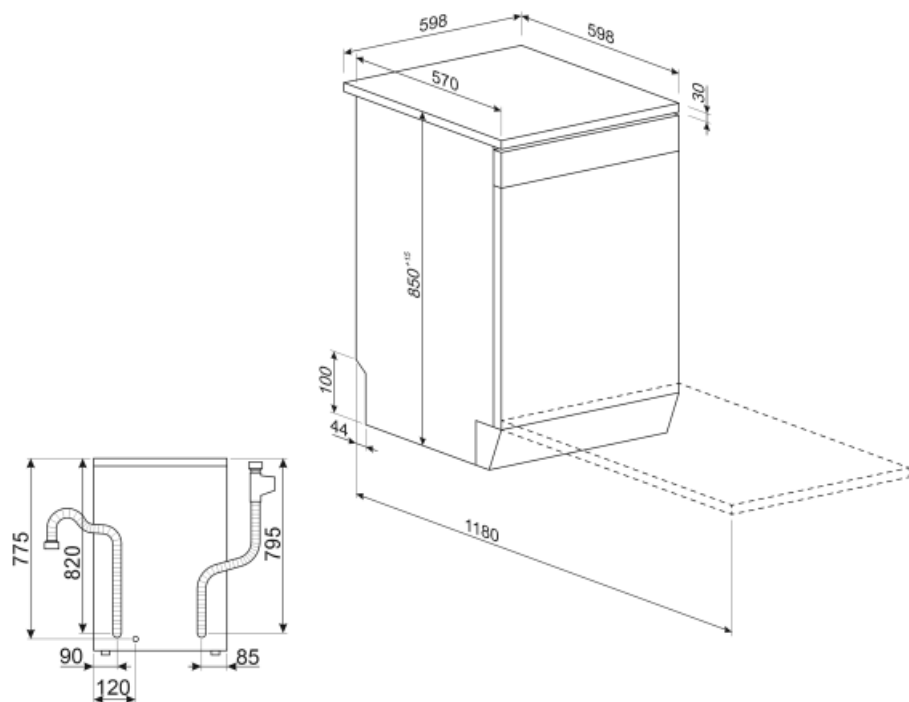

---


## Not included accessories

---



### KITPLV2



















Kit extension for dishwasher and washing machine: length mt. 2



### KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

## Symbols glossary

	Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.		Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.
	This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4		Option which improves the washing results of the selected programme. It increases the wash temperature and duration.
	Energy efficiency class C		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.		Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.
	Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.		Soak programme: The soak programme provides a rinse to prevent dirt from drying.
	...		...
	The symbols show the number of plate settings of the dishwasher.		Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.
	Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.		Programme suitable for washing and drying heavily soiled items with encrusted residues.
	Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.		The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.