# DF345CQSX

| | |
|---|---|
| **Product Family** | Dishwashers |
| **Commercial width** | 60 cm |
| **Commercial height** | 85 cm |
| **Installation** | Free-standing |
| **N° baskets** | 3, Flexi |
| **EAN code** | 8017709335984 |



## Programs

| | | | |
|---|---|---|---|
| **N. of programmes** | 8 | **ECO** | Yes |
| **Washing temperatures** | 50, 60, 65, 70 °C | **Mix** | Yes |
| **Soak** | Yes | **Intense 60°** | Yes |
| **Full express - 60 minutes** | Yes | **Auto 50°-60°** | Yes |
| **Express 50°** | Yes | | |

## Options

| | | | |
|---|---|---|---|
| **Delay timer option** | Up to 24 hours | **Crystal option** | Yes |
| **Extreme option** | Yes | **Sterilise option** | Yes |

## Baskets

| | | | |
|---|---|---|---|
| **Basket colour** | Grey | **Height adjustment of the upper basket** | On two levels (4 cm) |
| **Basket components colour** | Grey | **Largest loadable dish in upper basket** | 20,0 cm |
| **Handle** | In plastic with stainless steel insert on upper and lower basket | **Lower Basket** | With 4 foldable racks |
| | | **Largest loadable dish in lower basket** | 31.0 cm |
| **Upper Basket** | With 3 foldable racks | | |
| **Glass holder** | Yes | **Colour Inner Components** | Grey |

## Technical Features



| | |
|---|---|
| **Width (mm)** | 598 mm |
| **Depth (mm)** | 600 mm |
| **Display type** | LED display |
| **Product Height (mm)** | 848 mm |
| **Controls** | Electronic |
| **Display** | Delayed start, Programme time indicator, Time to end indication |
| **Programme graphics** | Symbols |
| **Salt light indicator** | Light |
| **Rinse aid indicator** | Light |
| **Progress indicator** | Yes |
| **End of cycle indicator** | On display, with acoustic signal |
| **Washing system** | Orbital |
| **Third spray arm** | Single |
| **Water softener** | With electronic setting |
| **Turbidity sensor Aquatest** | Yes |
| **Flood protection system** | Total Acquastop |
| **Water supply** | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| **Max water hardness** | 90°fH; 50°dH |
| **Drying system** | Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle |
| **Tub material** | Stainless steel |
| **Filter** | Stainless steel |
| **Concealed heating element** | Yes |
| **Hinges** | Self balancing with fixed hinges |
| **Adjustable feet** | Just for levelling |
| **Depth of dishwasher with open door (mm)** | 1168 mm |
| **Top cover** | In plastic |


## Performance / Energy Label - Reg. 2019




| | |
|---|---|
| **Energy Efficiency Class** | C |
| **Energy consumption [per 100 cycles, based on the eco programme]** | 75 kWh |
| **Rated capacity (ps)** | 14 |
| **Water consumption [per cycle]** | 11,0 litres |
| **Programme duration** | 4:00 h:min |
| **Airborne acoustical noise emissions** | 44 dB(A) re 1 pW |
| **Airborne acoustical noise emission class** | B |
| **Energy efficiency Index (EEI)** | 43,9 |


## Electrical Connection

| | |
|---|---|
| **Connected power** | 1950 W |
| **Current** | 10 A |
| **Voltage** | 220-240 V |
| **Frequency (Hz)** | 50 Hz |
| **Type of connection** | Single-phase |
| **Power supply cable length** | 150 cm |
| **Plug** | (G) UK e Singapore |

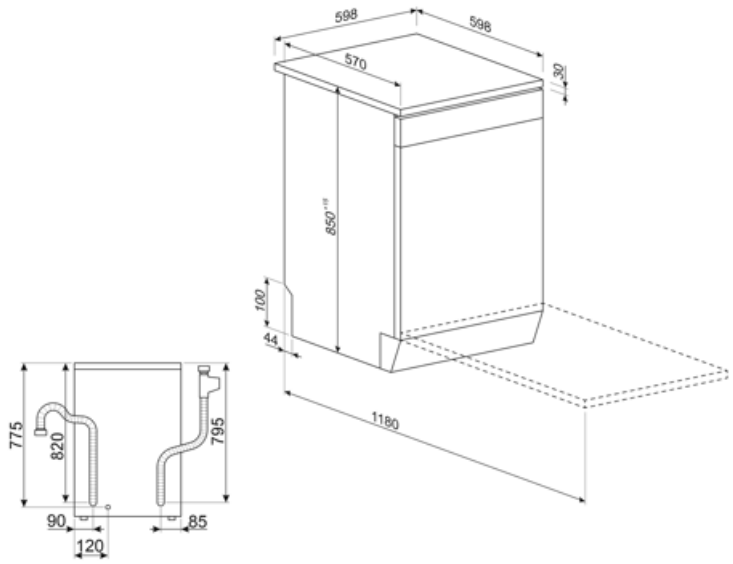
598
596
570
30
850+10
100
44
1180
775
820
795
90
85
120

## Compatible Accessories

**KITINC**



**KITPLV2**

Kit extension for dishwasher and washing machine: lenght mt. 2



## Symbols glossary




The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.




Noise Level: Excellent insulation and special devices keep noise to a minimum.




Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.




Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.




Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.




Energy efficiency class C



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.




Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.




Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.




14 place settings: Number of place settings.




A quick programme suitable for washing a load with fresh and light soil.




Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.




Programme suitable for washing and drying heavily soiled items with encrusted residues.



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.