

DF352CS

| | |
|-------------------|---------------|
| Product Family | Dishwashers |
| Width | 60 cm |
| Commercial height | 85 cm |
| Installation | Free-standing |
| N° baskets | 3, Flexi |
| EAN code | 8017709307790 |



Programmes



| | | | |
|---------------------------|---------------------------|----------------|-----|
| No. of programmes | 10 | ECO | Yes |
| Washing temperatures | 38, 45, 50, 65, 70, 75 °C | Mix | Yes |
| Soak | Yes | Quiet (-2 dB) | Yes |
| Express 27' | Yes | Intense | Yes |
| Crystal | Yes | Hygiene 99,9% | Yes |
| Full express - 60 minutes | Yes | Daily 1/2 load | Yes |

Options



| | | | |
|--------------------|----------------------------------|-------------------------|-----|
| Delay timer option | 3-6-9 hours, with automatic soak | Special programs option | Yes |
|--------------------|----------------------------------|-------------------------|-----|

Baskets



| | | | |
|--------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour | Grey | Largest loadable dish in upper basket | 19,0 cm |
| Basket components colour | Grey | Lower Basket | With 2 foldable racks |
| Handle | In plastic on upper and lower basket | Lower basket with anti-drip inserts | Yes |
| Upper Basket | With 1 foldable rack | Largest loadable dish in lower basket | 30,0 cm |
| Glass holder | Yes | | |

| | | | |
|---------------------------------------|-----------------|-------------------------|------|
| Height adjustment of the upper basket | On three levels | Colour Inner Components | Blue |
|---------------------------------------|-----------------|-------------------------|------|


Technical Features



| | |
|-------------------------|--------------------------------------|
| Width (mm) | 598 mm |
| Depth (mm) | 600 mm |
| Product Height (mm) | 848 mm |
| Controls | Electronic |
| Programme graphics | Symbols |
| On/off indicator | Yes |
| Salt light indicator | Light |
| Rinse aid indicator | Light |
| End of cycle indicator | Led on display, with acoustic signal |
| Washing system | Orbital |
| Third spray arm | Single |
| Water softener | With electronic setting |
| Flood protection system | Single Acquastop |

| | |
|---|---|
| Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Max water hardness | 100°FH;58°dH |
| Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Tank material | Stainless steel |
| Filter | Stainless steel |
| Concealed heating element | Yes |
| Hinges | Self balancing with fixed hinges |
| Adjustable feet | Just for levelling |
| Back cover | Yes, with covered counterweight |
| Depth of dishwasher with open door (mm) | 1168 |
| Removable top cover | Yes, with optional KIT In plastic |


Performance / Energy Label



| | | | |
|---|------------|--|------------------|
| Energy Efficiency Class (Washing cycle) | C | Programme duration | 4:25 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 73 KWh | Airborne acoustical noise emissions (spinning phase) | 45 dB(A) re 1 pW |
| Rated capacity (ps) | 13 | Airborne acoustical noise emission class | C |
| Water consumption [per cycle] | 9,0 litres | Energy efficiency Index (EEI) (Washing cycle) | 43,8 |

Electrical Connection

| | | | |
|-----------------|--------------------|---------------------------|--------------|
| Plug | (G) UK e Singapore | Frequency (Hz) | 50 Hz |
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 13 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | |

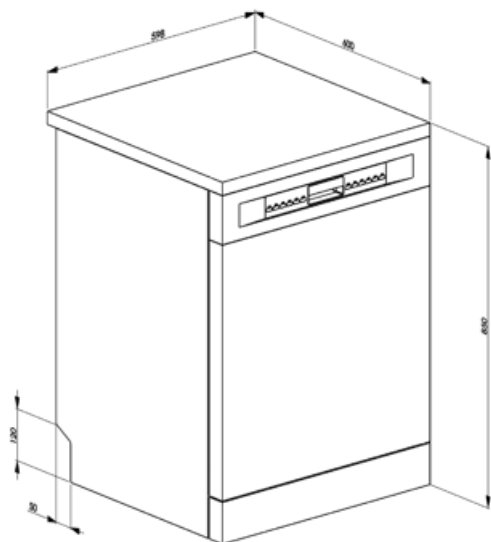

Not included accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITINC

a steel bar fitted on the top will block the dishwasher at the top.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2




















Alternative products



DF352CW

Colour: White

Symbols glossary

| | | | |
|--|--|---|---|
|  | Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance. |  | Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying. |
|  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |  | Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china. |
|  | 1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher. |  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |
|  | Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use. |  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  | Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load. |  | Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria. |
|  | The symbols show the number of plate settings of the dishwasher. |  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. |
|  | ... |  | ... |
|  | ... |  | Energy efficiency class C |
|  | HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising | | |