

DFA345BSTX





Product Family Dishwashers Width 60 cm Commercial height 85 cm

Installation Free-standing N° baskets 3, FlexiDuo Motor Inverter 2.0 EAN code 8017709339579



Yes

Yes

Yes

Programmes























No. of programmes 10 + 1Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Soak Express 27' Yes Crystal Yes Full express - 60 Yes minutes

ECO Yes Auto sensor 45-65 Quiet (-2 dB) Intense

Yes Yes Self clean Yes Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours, with automatic soak

1/2 load FlexiZone option (varied distribution)

Special programs option Yes

Baskets



colour



Basket colour Basket components

Grey Grey

Largest loadable dish in 19,0 cm

upper basket

With 4 foldable racks Lower Basket



Handle In plastic on upper and

lower basket

On three levels

Yes

Upper Basket With 3 foldable racks

Glass holder Yes

Height adjustment of the upper basket

Sliding Guides Extra

Glide

drip inserts

Largest loadable dish in 30,0 cm

Lower basket with anti- Yes

lower basket

Colour Inner

Components

Cutlery basket

Rlue

Yes

Yes

Technical Features







Width (mm) Depth (mm)

Display type Product Height (mm)

Controls

Display

Programme graphics

On/off indicator Salt light indicator Rinse aid indicator

End of cycle indicator

Washing system Third spray arm

Water softener

598 mm 600 mm

3 digit 848 mm Electronic

> Delayed start, Programme time indicator, Time to end

indication

Symbols and label

Yes Light Light

> Led on display, with acoustic signal

Planetarium Single

With electronic setting

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness

Drying system

100°fH;58°dH

Natural condenser drying, with Dry Assist + automatic

door opening system at the

end of the cycle Stainless steel

Stainless steel

Tank material Filter

Concealed heating

element

Hinges

Self balancing with fixed

hinges

Yes

Adjustable feet Just for levelling Back cover

Yes, with covered counterweight 1168 mm

Depth of dishwasher with open door (mm)

Removable top

Yes, with optional KIT

Performance / Energy Label

В

63 kWh









Energy Efficiency Class

(Washing cycle)

Energy consumption [per 100 cycles, based on the eco programme] Rated capacity (ps)

13 Water consumption [per 9,0 litres

cycle]

Programme duration Airborne acoustical

noise emissions (spinning phase) Airborne acoustical noise emission class

Energy efficiency Index (EEI) (Washing cycle)

R

37,9

4:25 h:min

44 dB(A) re 1 pW


Electrical Connection



Connected power 1800 W
Current 13 A
Voltage 220-240 V
Frequency (Hz) 50 Hz

Type of connection Power supply cable length Plug Single-phase 140 cm

(G) UK e Singapore

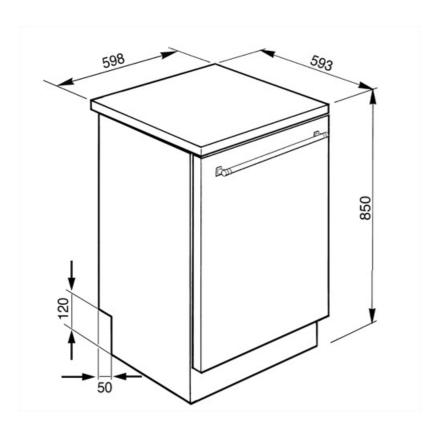



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITINC

a steel bar fitted on the top will block the dishwasher at the top.

KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2



Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



PLANETARIUM_WASHING_SYSTEM_72dpi



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



...









The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c

B

Energy efficiency class B





HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.