

# **DI262D**





**Product Family** Dishwashers Width 60 cm

Commercial height 82 cm Installation Fully-integrated built-in

Kitchen panel Not supplied

N° baskets

Motor Inverter 2.0 EAN code 8017709337339



### **Programmes**













Yes





No. of programmes 8 **ECO** Washing temperatures 50,60°C Mix Yes Self clean Full express - 60 Yes Intense 60° minutes Auto 50°-60° Express 50°

# **Options**









**Delay timer option** 

Up to 24 hours, with automatic soak

Crystal option Sterilise option Yes Yes

Yes

Yes

Yes

Yes

Yes

Extreme option Yes

### **Baskets**



**Basket colour** Grey Lower Basket With 2 foldable racks

Lower basket with anti- Yes **Basket components** Grey

drip inserts colour

Handle In plastic on upper and Largest loadable dish in 31.0 cm

lower basket

lower basket Colour Inner **Upper Basket** With central fixed racks Blue

On two levels (4 cm) Components Height adjustment of the upper basket **Cutlery basket** Yes



Largest loadable dish in 20,0 cm upper basket

#### **Technical Features**







Width (mm) 596 mm Depth (mm) 550 mm Display type 3 digit Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme time indicator, Time to end

indication

Programme graphics On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator On display, with acoustic

signal

84 KWh

Washing system Standard

Water softener With electronic setting

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Symbols

Yes

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

90°fH; 50°dH

Max water hardness Drying system

Natural condenser drying, with Dry Assist + automatic

door opening system at the

end of the cycle

Steam protection In plastic Tank material Stainless steel Filter Stainless steel

Concealed heating

element Hinges

Self balancing, Sliding,

Yes

**FLEXIFIT** 2 - 10 kg

40 - 175 mm

Min. and max. frontal

panel weight

Min. and max plinth

height

Adjustable feet 8cm, from 820 to 900mm

Additional gaskets Yes **Back cover** Yes Depth of dishwasher 1230

with open door (mm)

Back feet adjustable

from front

Yes

# Performance / Energy Label









**Energy Efficiency Class** D (Washing cycle)

**Energy consumption** [per 100 cycles, based

on the eco programme] Rated capacity (ps) Water consumption [per 9.9 litres

cycle]

Programme duration Airborne acoustical noise emissions (spinning phase)

Airborne acoustical noise emission class

Energy efficiency Index (EEI) (Washing cycle)

4:00 h:min

46 dB(A) re 1 pW

С

49.9

# **Electrical Connection**


Plug (G) UK e Singapore Connected power 1800 W

Current 10 A Frequency (Hz) Type of connection 50 Hz

Single-phase



Voltage 220-240 V Power supply cable 140 cm length

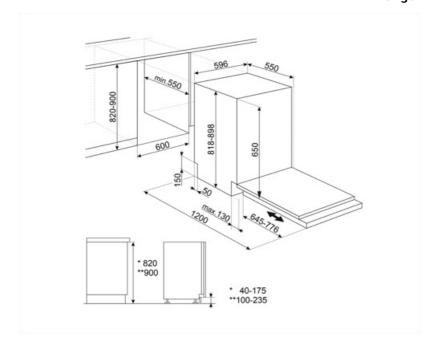



# **Compatible Accessories**

#### **KITGH**



Kit glass holder. It has to be fitted on the first basket but only if there are foldable



#### KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



#### KITPL60X

KITPL60B



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Toekick Kit in White colour with

be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

adjustable height and deepness. Can

#### KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2



### Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



COMM\_HEIGHT\_82\_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



ò°



AUTO 50°-60°

nin



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and



60°

recognises the type of dirt and automatically adjusts the washing parameters as appropriate.

Programme suitable for washing and drying

heavily soiled items with encrusted residues.

Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher



Option which improves the washing results of the selected programme. It increases the wash



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.



Energy efficiency class D

temperature and duration.

reduces it to 4



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.





The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.





### **Benefit**

#### Flexifit hinge system

Smooth-running door for optimal integration into the kitchen deisgn

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.