DI262D



Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
Kitchen panel	Not supplied
N° baskets	2
Motor	Inverter 2.0
EAN code	8017709337339

Programs

N. of programmes	8	**ECO**	Yes
Washing temperatures	50, 60 °C	**Mix**	Yes
Soak	Yes	**Self clean**	Yes
Full express - 60 minutes	Yes	**Intense 60°**	Yes
		Auto 50°-60°	Yes
Express 50°	Yes		

Options

Delay timer option	Up to 24 hours	**Crystal option**	Yes
Extreme option	Yes	**Sterilise option**	Yes

Baskets

Basket colour	Grey	**Lower Basket**	With 2 foldable racks
Basket components colour	Grey	**Lower basket with anti-drip inserts**	Yes
Handle	In plastic on upper and lower basket	**Largest loadable dish in lower basket**	31.0 cm
Upper Basket	With central fixed racks	**Colour Inner Components**	Blue
Height adjustment of the upper basket	On two levels (4 cm)	**Cutlery basket**	Yes

Largest loadable dish in upper basket	20,0 cm

Technical Features



Width (mm)	596 mm
Depth (mm)	550 mm
Display type	LED display (3 digit)
Product Height (mm)	818 mm
Controls	Electronic
Display	Delayed start, Programme time indicator, Time to end indication
Programme graphics	Symbols
On/off indicator	Yes
Salt light indicator	Light
Rinse aid indicator	Light
End of cycle indicator	On display, with acoustic signal
Washing system	Standard
Water softener	With electronic setting
Turbidity sensor Aquatest	Yes
Flood protection system	Total Acquastop
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Max water hardness	90°fH; 50°dH
Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Steam protection	In plastic
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing, Sliding, FLEXIFIT
Min. and max. frontal panel weight	2,5 - 10 kg
Min. and max plinth height	40 - 175 mm
Adjustable feet	8 cm, from 820 to 900 mm
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1230 mm
Back feet adjustable from front	Yes


Performance / Energy Label - Reg. 2019




Energy Efficiency Class	D
Energy consumption [per 100 cycles, based on the eco programme]	84 kWh
Rated capacity (ps)	13
Water consumption [per cycle]	9,9 litres
Programme duration	4:00 h:min
Airborne acoustical noise emissions	46 dB(A) re 1 pW
Airborne acoustical noise emission class	C
Energy efficiency Index (EEI)	49,9

Electrical Connection

Connected power	1800 W
Current	10 A
Voltage	220-240 V
Frequency (Hz)	50 Hz
Type of connection	Single-phase
Power supply cable length	140 cm
Plug	(G) UK e Singapore

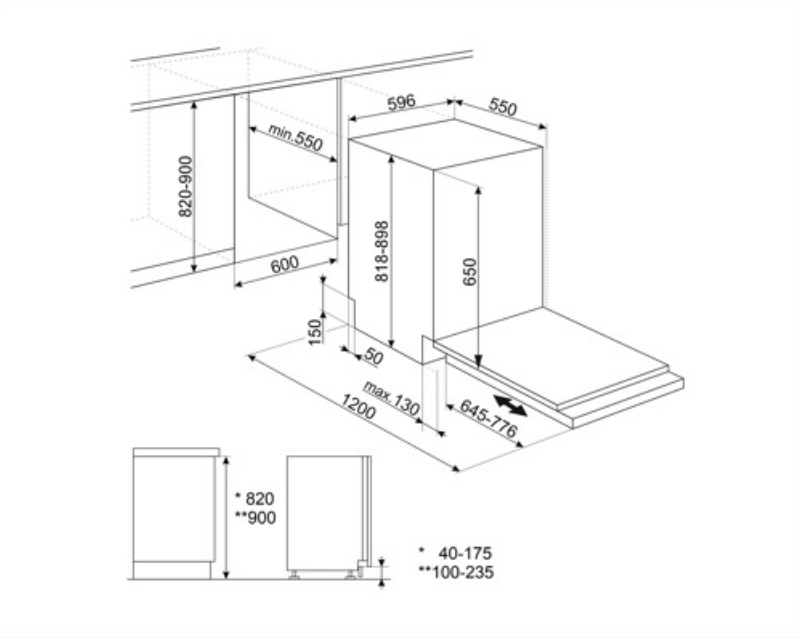
596
550
min.550
820-900
818-898
650
600
150
50
max.130
1200
645-776
* 820
**900
* 40-175
**100-235

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Energy efficiency class D



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



A quick programme suitable for washing a load with fresh and light soil.



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



13 place settings: Number of place settings.



To improve the drying of dishes without leaving stains.



82 cm high



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.





The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.