

DI323BL







Product Family Width

60 cm Commercial height 82 cm

Installation Fully-integrated built-in Kitchen panel Not supplied N° baskets 3, FlexiDuo Motor Inverter 2.0

EAN code 8017709307844



Yes

Yes

Yes

Programmes



















Dishwashers







No. of programmes

Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C

Soak Express 27' Yes Crystal Yes

Full express - 60 minutes

ECO

10 + 1

Yes

Yes

Auto sensor 45-65

Quiet (-2 dB)

Yes Intense Yes Self clean Yes

Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours, with automatic soak

1/2 load FlexiZone option (varied distribution)

Special programs option Yes

Baskets





Basket colour

Basket components colour

Grey Grey

Largest loadable dish in 19,0 cm

upper basket

With 4 foldable racks Lower Basket



Handle In plastic on upper and

lower basket

On three levels

Yes

Upper Basket With 3 foldable racks

Glass holder Yes

Height adjustment of the upper basket

Sliding Guides Extra

Glide

Lower basket with anti- Yes

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Colour Inner

Components

Cutlery basket Yes

Technical Features











Width (mm)

598 mm Depth (mm) 545 mm Display type 3 digit

Product Height (mm) 818 mm **Controls** Electronic

Display Delayed start, Programme

time indicator

Programme graphics Symbols and label

On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator ActiveLight Washing system Planetarium Third spray arm Sinale

Water softener With electronic setting

Yes

В

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply Single; cold/hot water max.

Blue

60°C - energysave with hot

water up to 35%

100°fH;58°dH Max water hardness

Drying system Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic Tank material Stainless steel Filter Stainless steel

Concealed heating

element

Self balancing, Sliding, Hinges

FLEXIFIT 2 - 11 kg

Yes

Min. and max. frontal

panel weight

Min. and max plinth

height

50 - 215 mm

7cm. from 820 to 890 mm Adjustable feet

Yes

Yes

1146

Back cover Depth of dishwasher

with open door (mm)

Back feet adjustable

from front

In plastic Top cover

Performance / Energy Label









Energy Efficiency Class

(Washing cycle)

63 KWh

Energy consumption [per 100 cycles, based on the eco programme]

13 Rated capacity (ps) Water consumption [per 9,0 litres

cycle]

Programme duration Airborne acoustical

noise emissions (spinning phase) Airborne acoustical

noise emission class

Energy efficiency Index (EEI) (Washing cycle)

4:25 h:min 42 dB(A) re 1 pW

R

37,9



Electrical Connection


Plug (G) UK e Singapore

Connected power 1800 W Current 13 A

Voltage 220-240 V

Frequency (Hz)
Type of connection
Power supply cable
length

50 Hz Single-phase 140 cm

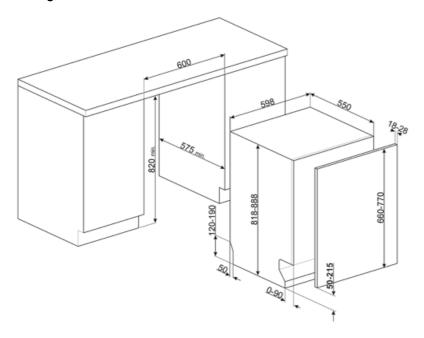



Not included accessories

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITFLEXI



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KIT82CX

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2



KIT82CN



Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Energy efficiency class B



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



PLANETARIUM_WASHING_SYSTEM_72dpi



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



•••







...



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



..



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising