

DI324AQLL





Product Family Dishwashers
Width 60 cm
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied

N° baskets 3, FlexiDuo with Easy Glide

EAN code 8017709334468



Programmes































No. of programmes 12+2 Auto sensor 45-65 Yes Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Yes Soak Quiet (-2 dB) Yes Express 27' Yes Intense Yes Crystal Yes Self clean Yes Hygiene 99,9% Full express - 60 Yes Yes minutes **Delicate** Yes Yes **ECO** Trays Yes Green express Yes

Options











Dry Assist+ option

Yes Up to 24 hours, with automatic soak

Yes

Special programs option Yes
Clean&Shine option Yes

1/2 load FlexiZone option (varied distribution)

Delay timer option

Baskets





Basket colour Grey Sliding Guides Extra Yes Glide



Basket components

colour

Grey

Largest loadable dish in 19,0 cm

upper basket Lower Basket

Handle In plastic with stainless steel insert on upper and

lower basket

With 3 foldable racks

drip inserts

With 4 foldable racks

Natural condenser drying,

with Dry Assist + automatic

door opening system at the

end of the cycle

With White led

Stainless steel

Stainless steel

Self balancing, Sliding,

In plastic

Yes

FLEXIFIT

2 - 11 kg

50 - 215 mm

Lower basket with anti- Yes

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Blue

Components

Technical Features

Height adjustment of

the upper basket





Upper Basket

Glass holder









Yes



On three levels

Width (mm) Depth (mm) Display type

Product Height (mm)

Display

Controls

Programme graphics Salt light indicator Rinse aid indicator End of cycle indicator Washing system

Third spray arm Water softener

Turbidity sensor

Aquatest

Flood protection system Water supply

Max water hardness

:::**/::::**





598 mm 545 mm LED display

818 mm Electronic touch control

Delayed start, Programme time indicator,

Consumptions Symbols Light Light

ActiveLight Planetarium Single

Yes

With electronic setting

Total Acquastop

Single; cold/hot water max.

60°C - energysave with hot water up to 35%

100°fH;58°dH

Drying system

Steam protection Internal light Tank material Filter

Concealed heating element

Hinges Min. and max. frontal

panel weight Min. and max plinth

height

Can be installed incolumn

Adjustable feet

Additional gaskets

7cm, from 820 to 890 mm Yes, with stainless steel

Yes

plate Yes Back cover Depth of dishwasher 1168 mm

with open door (mm) Back feet adjustable

from front Top cover Yes

In plastic

Performance / Energy Label



cycle]







Energy Efficiency Class (Washing cycle)

Energy consumption [per 100 cycles, based

on the eco programme] Rated capacity (ps) Water consumption [per 10,5 litres

54 kWh

Programme duration Airborne acoustical noise emissions

(spinning phase) Airborne acoustical noise emission class 4:35 h:min

42 dB(A) re 1 pW

В




Energy efficiency Index 31,8 (EEI) (Washing cycle)

Electrical Connection

Connected power 1800 W
Current 10 A
Voltage 220-240 V
Frequency (Hz) 50 Hz

Type of connection Power supply cable length Plug Single-phase 140 cm

(G) UK e Singapore

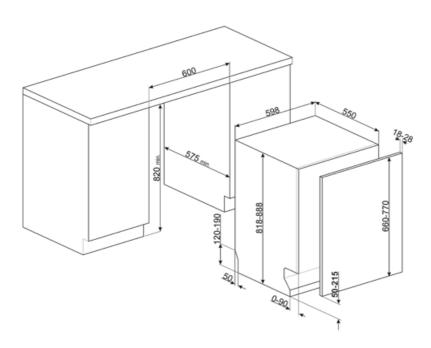



Compatible Accessories



KIT82CN



KIT82CX



KIT82SPRAN



KIT82SPRMW



KIT82SPRX



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg

(max 15 kg 82 cm and 13,5 kg 86 cm)



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

KITFLEXI

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.




KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X







Kit extension for dishwasher and washing machine: length mt. 2



Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Energy efficiency class A



Clean&Shine option: For perfect cleaning results, this option adds an extra rinse to the wash cycle, which also gives the dishes a higher gloss.



Installation in column: Installation in column



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



...



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



PLANETARIUM_WASHING_SYSTEM_72dpi



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.





Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



...





٤ .





Baking tray programme: for intensive cleaning of the oven trays. Place the trays in the lower basket of the dishwasher.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising