

# DI362DQ



|                   |                           |
|-------------------|---------------------------|
| Product Family    | Dishwashers               |
| Width             | 60 cm                     |
| Commercial height | 82 cm                     |
| Installation      | Fully-integrated built-in |
| Kitchen panel     | Not supplied              |
| N° baskets        | 3, Flexi                  |
| Motor             | Inverter 2.0              |
| EAN code          | 8017709343590             |



## Programmes



|                           |           |              |     |
|---------------------------|-----------|--------------|-----|
| No. of programmes         | 8         | ECO          | Yes |
| Washing temperatures      | 50, 60 °C | Mix          | Yes |
| Soak                      | Yes       | Self clean   | Yes |
| Full express - 60 minutes | Yes       | Intense 60°  | Yes |
| Express 50°               | Yes       | Auto 50°-60° | Yes |

## Options



|                    |                                     |                  |     |
|--------------------|-------------------------------------|------------------|-----|
| Delay timer option | Up to 24 hours, with automatic soak | Crystal option   | Yes |
| Extreme option     | Yes                                 | Sterilise option | Yes |

## Baskets

|                                       |                                      |                                       |                       |
|---------------------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour                         | Grey                                 | Largest loadable dish in upper basket | 19,0 cm               |
| Basket components colour              | Grey                                 | Lower Basket                          | With 2 foldable racks |
| Handle                                | In plastic on upper and lower basket | Largest loadable dish in lower basket | 31.0 cm               |
| Upper Basket                          | With central fixed racks             | Colour Inner Components               | Blue                  |
| Height adjustment of the upper basket | On two levels (4 cm)                 |                                       |                       |

## Technical Features



|                         |   |
|-------------------------|---|
| Width (mm)              | 596 mm  |
| Depth (mm)              | 550 mm  |
| Display type            | 3 digit   |
| Product Height (mm)     | 818 mm  |
| Controls                | Electronic  |
| Display                 | Delayed start, Programme time indicator, Time to end indication |
| Programme graphics      | Symbols   |
| On/off indicator        | Yes   |
| Salt light indicator    | Light   |
| Rinse aid indicator     | Light   |
| End of cycle indicator  | On display, with acoustic signal                                |
| Washing system          | Standard  |
| Water softener          | With electronic setting   |
| Turbidity sensor        | Yes   |
| Aquatest                |   |
| Flood protection system | Total Acquastop   |

|   |   |
|---|---|
| Water supply                            | Single; cold/hot water max. 60°C - energysave with hot water up to 35%                            |
| Max water hardness                      | 90°FH; 50°dH  |
| Drying system                           | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Steam protection                        | In plastic  |
| Tank material                           | Stainless steel   |
| Filter                                  | Stainless steel   |
| Concealed heating element               | Yes   |
| Hinges                                  | Self balancing, Sliding, FLEXIFIT   |
| Min. and max. frontal panel weight      | 2 - 10 kg   |
| Min. and max plinth height              | 40 - 175 mm   |
| Adjustable feet                         | 8cm, from 820 to 900mm  |
| Additional gaskets                      | Yes   |
| Back cover                              | Yes   |
| Depth of dishwasher with open door (mm) | 1230 mm   |
| Back feet adjustable from front         | Yes   |

## Performance / Energy Label



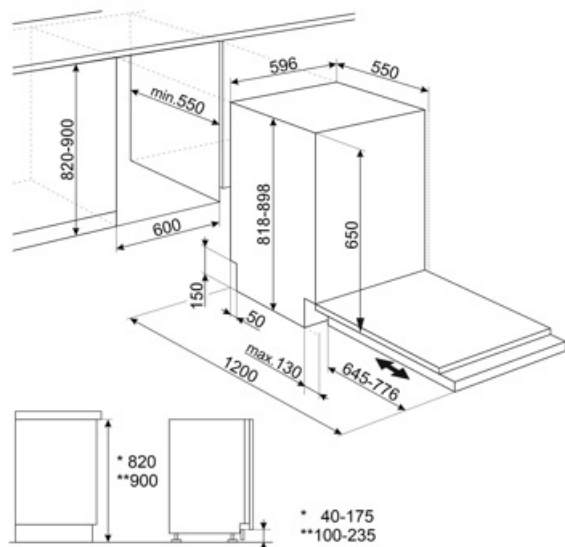
|   |             |
|---|-------------|
| Energy Efficiency Class (Washing cycle)                         | D           |
| Energy consumption [per 100 cycles, based on the eco programme] | 85 kWh      |
| Rated capacity (ps)   | 14          |
| Water consumption [per cycle]                                   | 10,5 litres |

|  |                  |
|--|------------------|
| Programme duration                                   | 4:00 h:min       |
| Airborne acoustical noise emissions (spinning phase) | 46 dB(A) re 1 pW |
| Airborne acoustical noise emission class             | C                |
| Energy efficiency Index (EEI) (Washing cycle)        | 49,9             |























## Electrical Connection

|                 |           |
|-----------------|-----------|
| Connected power | 1800 W    |
| Current         | 10 A      |
| Voltage         | 220-240 V |
| Frequency (Hz)  | 50 Hz     |

|                           |                    |
|---------------------------|--------------------|
| Type of connection        | Single-phase       |
| Power supply cable length | 140 cm             |
| Plug                      | (G) UK e Singapore |



## Symbols glossary

|  |  |   |  |
|--|--|---|--|
|    | Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.  |    | Energy efficiency class D  |
|    | COMM_HEIGHT_82_72dpi   |    | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.  |
|    | Option which improves the washing results of the selected programme. It increases the wash temperature and duration.   |    | Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.  |
|    | Noise Level: Excellent insulation and special devices keep noise to a minimum.   |    | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.  |
|    | Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.  |    | Soak programme: The soak programme provides a rinse to prevent dirt from drying.   |
|  | ...  |  | ...  |
|  | The symbols show the number of plate settings of the dishwasher.   |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.   |  | ...  |
|  | Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.                            |  | This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4   |
|  | Programme suitable for washing and drying heavily soiled items with encrusted residues.  |  | Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.  |
|  | The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level. |  |  |

