

DI362DQ





Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, Flexi Motor Inverter 2.0 EAN code 8017709343590



Programs

















N. of programmes 8 **ECO** Yes Washing temperatures 50,60°C Mix Yes Yes Self clean Yes Full express - 60 Intense 60° Yes Yes minutes Auto 50°-60° Yes Express 50° Yes

Options











Delay timer option Up to 24 hours Crystal option Yes Extreme option Sterilise option Yes Yes

Baskets

Basket colour **Basket components**

colour Handle Grey

Grey

In plastic on upper and

lower basket With central fixed racks On two levels (4 cm)

Largest loadable dish in 19,0 cm

upper basket

Lower Basket With 2 foldable racks

Largest loadable dish in 31.0 cm lower basket

Colour Inner Blue Components

Upper Basket Height adjustment of the upper basket



Technical Features







Width (mm) 596 mm 550 mm Depth (mm)

LED display (3 digit) Display type

Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme time indicator, Time to end

indication

Programme graphics Symbols On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator On display, with acoustic

signal

Standard Washing system

Water softener With electronic setting

Turbidity sensor Yes

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

90°fH; 50°dH Max water hardness

Drying system Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic Tub material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing, Sliding,

FLEXIFIT

2,5 - 10 kg

40 - 175 mm

Yes

Min. and max. frontal

panel weight

Min. and max plinth

height

8 cm. from 820 to 900 mm Adjustable feet

Additional gaskets Yes Back cover Yes

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

1230 Yes

Performance / Energy Label - Reg. 2019

D

85 kWh











Energy Efficiency Class Energy consumption [per 100 cycles, based on the eco programme]

Rated capacity (ps) 14

Water consumption [per 10,5 litres

cycle]

Programme duration Airborne acoustical noise emissions

Airborne acoustical noise emission class

Energy efficiency Index (EEI)

4:00 h:min

46 dB(A) re 1 pW

С

49.9


Electrical Connection

Plug (G) UK e Singapore

Connected power 1800 W Current 10 A Voltage 220-240 V Frequency (Hz) Type of connection Power supply cable length

50 Hz Single-phase 140 cm



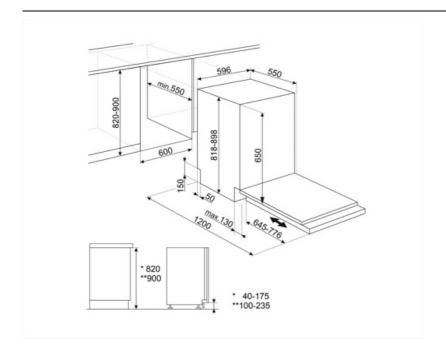



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Energy efficiency class D



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



A quick programme suitable for washing a load with fresh and light soil.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



14 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.





The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.





Benefit (TT)

Flexifit hinge system

Smooth-running door for optimal integration into the kitchen deisgn

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.