

DI4522



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Width | 45 cm |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 2 |
| Motor | Inverter 2.0 |
| EAN code | 8017709302931 |



Programmes



| | | | |
|----------------------|-----------|--------------|-----|
| No. of programmes | 6 | ECO | Yes |
| Washing temperatures | 50, 60 °C | Self clean | Yes |
| Soak | Yes | Mix 60° | Yes |
| Express 50° | Yes | Auto 50°-60° | Yes |

Options





| | | | |
|--------------------|---------|----------------|-----|
| Delay timer option | 3 hours | Extreme option | Yes |
|--------------------|---------|----------------|-----|

Baskets






| | | | |
|---------------------------------------|--------------------------------------|---------------------------------------|------------------|
| Basket colour | Grey | Lower Basket | With fixed racks |
| Basket components colour | Grey | Lower basket with anti-drip inserts | Yes |
| Handle | In plastic on upper and lower basket | Largest loadable dish in lower basket | 31,5 cm |
| Upper Basket | With central fixed racks | Colour Inner Components | Grey |
| Height adjustment of the upper basket | On two levels (4 cm) | Cutlery basket | Yes |
| Largest loadable dish in upper basket | 20,0 cm | | |

Technical Features


| | | | |
|--|---|--|---|
|  |  | | |
| Width (mm) | 446 mm | Max water hardness | 90°fH; 50°dH |
| Depth (mm) | 550 mm | Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Product Height (mm) | 818 mm | | |
| Controls | Electronic | | |
| Display | Delayed start, Programme time indicator, Consumptions | Steam protection | In plastic |
| | | Tank material | Stainless steel |
| Programme graphics | Symbols | Filter | Stainless steel |
| On/off indicator | Yes | Concealed heating element | Yes |
| Salt light indicator | Light | Hinges | Self balancing, Sliding, FLEXIFIT |
| Rinse aid indicator | Light | | |
| End of cycle indicator | Acoustic signal | Min. and max. frontal panel weight | 2 - 7,5 kg |
| Washing system | Standard | Min. and max plinth height | 40 - 175 mm |
| Water softener | With electronic setting | Adjustable feet | 6 cm, from 820 to 880 mm |
| Flood protection system | Total Acquastop | Additional gaskets | Yes |
| Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% | Depth of dishwasher with open door (mm) | 1200 |
| | | Back feet adjustable from front | Yes |

Performance / Energy Label

| | | | |
|--|---|---|------------------|
|  |  |  | |
| Energy Efficiency Class (Washing cycle) | E | Programme duration | 4:00 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 70 kWh | Airborne acoustical noise emissions (spinning phase) | 46 dB(A) re 1 pW |
| Rated capacity (ps) | 9 | Airborne acoustical noise emission class | C |
| Water consumption [per cycle] | 9,9 litres | Energy efficiency Index (EEI) (Washing cycle) | 55,9 |

Electrical Connection

| | | | |
|------------------------|--------------|----------------------------------|--------------|
| Plug | (F;E) Schuko | Frequency (Hz) | 50 Hz |
| Connected power | 1950 W | Type of connection | Single-phase |
| Current | 10 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | |

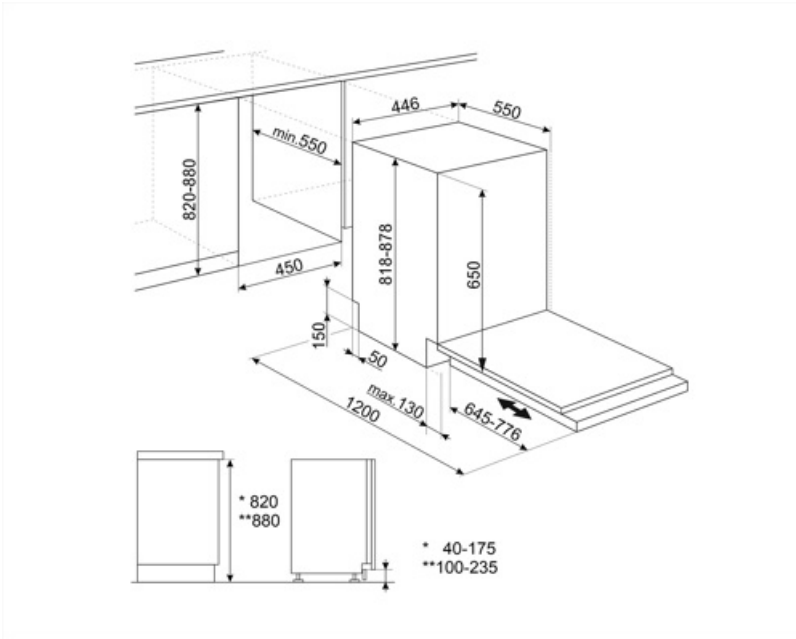

















Not included accessories

KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2



Symbols glossary

| | |
|---|---|
|  <p>Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.</p> |  <p>Energy efficiency class E</p> |
|  <p>COMM_HEIGHT_82_72dpi</p> |  <p>Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.</p> |
|  <p>Option which improves the washing results of the selected programme. It increases the wash temperature and duration.</p> |  <p>Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.</p> |
|  <p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p> |  <p>Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.</p> |
|  <p>Soak programme: The soak programme provides a rinse to prevent dirt from drying.</p> |  <p>Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.</p> |
|  <p>...</p> |  <p>...</p> |
|  <p>Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.</p> |  <p>Programme suitable for washing and drying normally soiled items.</p> |
|  <p>System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.</p> |  <p>The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.</p> |