

DI613ATP



Product Family Width Commercial height Installation N° baskets Motor EAN code Dishwashers 60 cm 82 cm Fully-integrated built-in 3, FlexiDuo Single phase 8017709226329



Programmes

① E	CO AUTO 45°-65°	Eco	28	*	C70"
No. of programmes			5+5 c	quick p	
Washing temperatures			38, 4	5, 50, 6	
~ .				V	

Soak Rapid 27' Glass ECO 5+5 quick programmes 38, 45, 50, 65, 70 °C Yes Yes Yes Yes

10

Auto sensor 45-65	Yes
ECO Quick	Yes
Delicate and Quick	Yes
Normal Quick	Yes
Super	Yes
Super Quick	Yes

Options

$\overline{\mathbb{N}}$	(¹ /2)	(roc)	
Ener	gy so	iving	option

EnerSave Delay timer option

1/2 load FlexiZone option (varied distribution) Up to 24 hours, with automatic soak Yes

Yes

Quick Time optionYesSanitizing optionYesHyclean

Baskets



Largest loadable dish in 23,5 cm upper basket Lower Basket With 4 foldable racks



Handle

	steel insert on upper and lower basket
Upper Basket	With central fixed racks
Height adjustment of the upper basket	On three levels
Sliding Guides Extra Glide	Yes

In plastic with stainless

Lower basket with anti-Yes drip inserts Largest loadable dish in 30,0 cm lower basket Cutlery basket 13 place settings sliding

Technical Features

ACTIVE			
Width (mm)	598 mm	Water supply	Single; cold/hot water max.
Depth (mm)	570 mm		60°C - energysave with hot
Display type	3 digit		water up to 35%
Product Height (mm)	818 mm	Max water hardness	100°fH;58°dH
Controls	Electronic	Drying system	Natural condenser drying, with EnerSave automatic
Display	Delayed start, Programme time indicator, Time to end		door opening system at the end of the cycle
indication Programme graphics Symbols and label On/off indicator Yes		Steam protection	In plastic
	•	Tank material Filter	Stainless steel
			Stainless steel
Salt light indicator	Light	Concealed heating	Yes
Rinse aid indicator	Light	element	
End of cycle indicator	ActiveLight	Hinges	Self balancing, Sliding,
Washing system	Planetarium		FLEXIFIT
Third spray arm	Single	Min. and max. frontal	2 - 11 kg
Water softener	With electronic setting	panel weight	
Turbidity sensor	Yes	Adjustable feet	7cm, from 820 to 890 mm
			_
Aquatest		Insulation level	Тор
Aquatest Flood protection system	Total Acquastop	Insulation level Additional gaskets	Top Yes, with stainless steel plate
•	Total Acquastop		Yes, with stainless steel
•	Total Acquastop	Additional gaskets	Yes, with stainless steel plate

Electrical Connection

Plug Connected power Current Voltage (G) UK e Singapore 1800 W 13 A 220-240 V Frequency (Hz) Type of connection Power supply cable length

Back feet adjustable


from front Top cover

> 50 Hz Single-phase 140 cm

Yes

In plastic



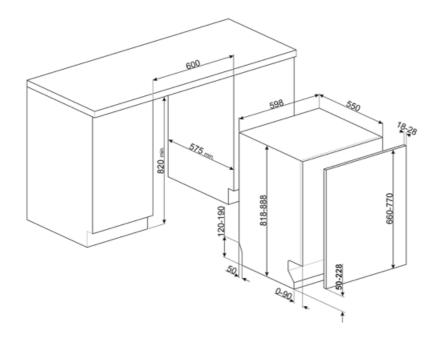



Not included accessories



**-

KITFLEXI

KITPL60B Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Kit for 60cm dishwashers with FlexiFit

hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N


Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

•se•smeg

Symbols glossary

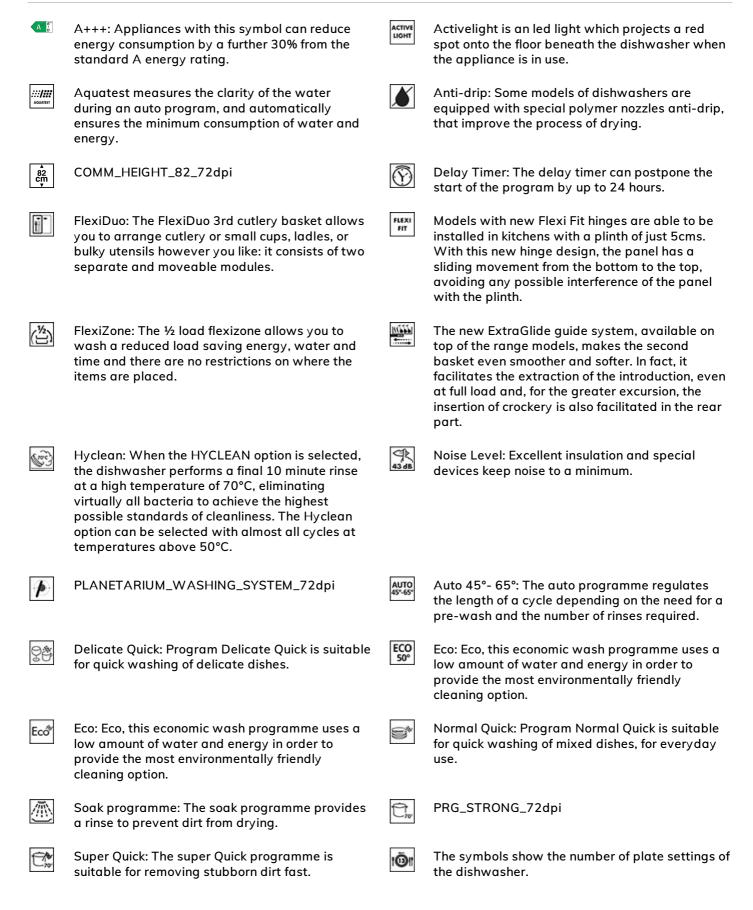



 \approx

Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.