

DI613PNH





Product Family Dishwashers
Commercial width 60 cm
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied
N° baskets 3, FlexiDuo
Motor Single phase
EAN code 8017709226305



Programs / Functions















N. of programmes 5+5 quick programmes Auto sensor 45-65 Yes Washing temperatures 38, 45, 50, 65, 70 °C **ECO Quick** Yes Soak **Delicate and Quick** Yes Rapid 27' Yes Mix Express Yes Glass Yes Super Yes **ECO** Yes Super Quick Yes

Options







Enersave option
Delay timer option
1/2 load FlexiZone

Yes

Yes

Up to 24 hours

Quick Time option Sanitizing option Hyclean

Yes Yes

Baskets

option



colour

Basket colour Grey Largest loadable dish in 18,0 cm

Basket components Grey upper basket

Lower Basket With 4 foldable racks

Handle In plastic on upper and Lower basket with anti- Yes

lower basket drip inserts

Upper Basket With central fixed racks Largest loadable dish in 30,0 cm

lower basket



Height adjustment of the upper basket

On three levels (5 cm)

Cutlery basket

13 place settings sliding

Technical Features













Width (mm) 598 mm Depth (mm) 545 mm

Display type LED display (3 digit)

Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme time indicator, Time to end

indication

Programme graphics Symbols and label

On/off indicator Yes Salt light indicator Light Rinse aid indicator Light End of cycle indicator ActiveLight **Planetarium** Washing system Third spray arm Single

Water softener With electronic setting

Turbidity sensor

Aquatest

Flood protection system

Water supply

Yes **Total Acquastop**

Single; cold/hot water max.

60°C - energysave with hot water up to 35%

Max water hardness

Drying system

door opening system at the

end of the cycle

Steam protection Child safety system (door lock)

Push-pull opening

system without handle Tub material

Filter Concealed heating

element

Hinges

Min. and max. frontal

panel weight

Min. and max plinth

height

Adjustable feet

Insulation level Back cover

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

100°fH;58°dH

Natural condenser drying, with EnerSave automatic

In plastic Yes

Yes

Stainless steel Stainless steel

Yes

Self balancing with variable

hinges

2 - 9 kg

100 - 228 mm

7cm, from 820 to 890 mm

Hyper Yes

1146

Yes

In plastic

Electrical Connection

Plug

Connected power

Current Voltage (G) UK e Singapore


1800 W 13 A 220-240 V Frequency (Hz) Type of connection Power supply cable

length

50 Hz

Single-phase 140 cm



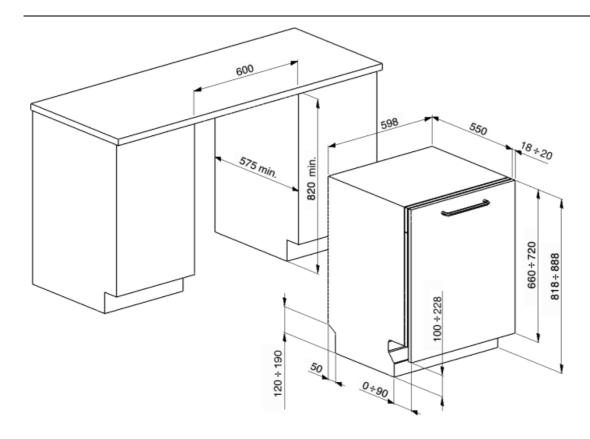



Not included accessories

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2





Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



Symbols glossary (TT)



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



82 cm high



A+++: Appliances with this symbol can reduce energy consumption by a further 30% from the standard A energy rating.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Hyclean: When the HYCLEAN option is selected, the dishwasher performs a final 10 minute rinse at a high temperature of 70°C, eliminating virtually all bacteria to achieve the highest possible standards of cleanliness. The Hyclean option can be selected with almost all cycles at temperatures above 50°C.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Automatic opening: some models have Automatic opening door when the cycle is finished which is a perfect solution for handle-less kitchen units as no handle is needed. For safety reasons, the door locks automatically when the machine is in use to avoid it being opened inadvertently.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Delicate Quick: Program Delicate Quick is suitable for quick washing of delicate dishes.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



PRG_STRONG_72dpi



Super Quick: The super Quick programme is suitable for removing stubborn dirt fast.





13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.