

DI613PNH





Product Family Dishwashers
Commercial width 60 cm
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied
N° baskets 3, FlexiDuo
Motor Single phase
EAN code 8017709226305



Programs



Soak

Glass

ECO

Rapid 27'



N. of programmes



Washing temperatures







5+5 quick programmes Auto sensor 45-65 Yes 38, 45, 50, 65, 70 °C **ECO Quick** Yes **Delicate and Quick** Yes Yes Mix Express Yes Yes Super Yes Yes Super Quick Yes

Options







Enersave option
Delay timer option
1/2 load FlexiZone

Up to 24 hours Yes

Yes

Quick Time option Sanitizing option Hyclean

Yes Yes

Baskets

option



Basket colour Grey Largest loadable dish in 18,0 cm

Basket components Grey upper basket

colourLower BasketWith 4 foldable racks

Handle In plastic on upper and Lower basket with anti- Yes

lower basket drip inserts

Upper Basket With central fixed racks Largest loadable dish in 30,0 cm

lower basket



Height adjustment of the upper basket

On three levels (5 cm)

Cutlery basket

13 place settings sliding

Technical Features













Width (mm) 598 mm Depth (mm) 545 mm

Display type LED display (3 digit)

Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme time indicator, Time to end

indication

Programme graphics Symbols and label

On/off indicator Yes Salt light indicator Light Rinse aid indicator Light End of cycle indicator ActiveLight Washing system Planetarium Third spray arm Single

Water softener With electronic setting

Yes

Turbidity sensor

Aquatest

Flood protection system

Water supply

Total Acquastop

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness

Drying system

Steam protection Child safety system

Push-pull opening

system without handle Tub material

Filter Concealed heating

element Hinges

(door lock)

Min. and max. frontal

panel weight

Min. and max plinth

height

Adjustable feet

Insulation level Back cover

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

100°fH;58°dH

Natural condenser drying, with EnerSave automatic door opening system at the

end of the cycle

In plastic

Yes

Yes

Stainless steel Stainless steel

Yes

Self balancing with variable

hinges

2 - 9 kg

100 - 228 mm

7cm, from 820 to 890 mm

Hyper Yes 1146

Yes

In plastic

Electrical Connection

Plug

Connected power Current Voltage

(G) UK e Singapore


1800 W 13 A 220-240 V Frequency (Hz) Type of connection Power supply cable

length

50 Hz

Single-phase 140 cm



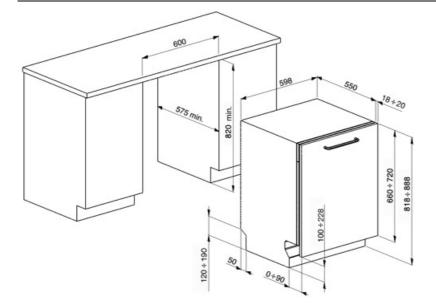



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60B

KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Toekick Kit in White colour with

be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

adjustable height and deepness. Can

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



A+++: Appliances with this symbol can reduce energy consumption by a further 30% from the standard A energy rating.



To improve the drying of dishes without leaving stains.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Hyclean: When the HYCLEAN option is selected, the dishwasher performs a final 10 minute rinse at a high temperature of 70°C, eliminating virtually all bacteria to achieve the highest possible standards of cleanliness. The Hyclean option can be selected with almost all cycles at temperatures above 50°C.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Automatic opening: some models have Automatic opening door when the cycle is finished which is a perfect solution for handle-less kitchen units as no handle is needed. For safety reasons, the door locks automatically when the machine is in use to avoid it being opened inadvertently.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Delicate Quick: Program Delicate Quick is suitable for quick washing of delicate dishes.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



PRG_STRONG_72dpi



Super Quick: The super Quick programme is suitable for removing stubborn dirt fast.





13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Benefit (TT)

Active Light

Maximum control thanks to the light projected on the floor that indicates when the dishwasher is running and when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Planetarium Wash System

Full and deep wash coverage thanks to the advanced movement of the spray arm, an innovation patented by Smeg

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.