DW8210X



Product Family	Dishwashers
Commercial height	ADA Compliant
Installation	Under counter built-in
N° baskets	3, Flexi
Motor	Inverter
EAN code	8017709354749

Programs

N. of programmes	5	**Normal**	Yes
Washing temperatures	45, 50, 65, 70 °F	**Rinse**	Yes
Auto sensor 45-65	Yes	**Pots & Pans**	Yes
Express 60°	Yes		

Options

Dry Assist+ option	Yes	**Intensive wash zone option**	
Professional option			

Baskets


Basket components colour	Grey	**Lower Basket**	With fixed racks
Upper Basket	With central fixed racks	**Lower basket with anti-drip inserts**	Yes
Height adjustment of the upper basket	On three levels (5 cm)	**Colour Inner Components**	Sage Leaf
Largest loadable dish in upper basket	25,0 inches	**Cutlery basket**	Yes

Technical Features

Width (mm)	23 9/16 "
Depth (mm)	22 7/16 "
Product Height (mm)	32 3/16 "
Programme graphics	Written in EN
On/off indicator	Yes
Rinse aid indicator	Light
End of cycle indicator	Led on display, with acoustic signal
Auto switch-off	Yes
Washing system	Orbital
Third spray arm	Single
Turbidity sensor Aquatest	Yes
Flood protection system	Single Acquastop
Max water hardness	100°fH;58°dH
Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Steam protection	Metallic sheet
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with variable hinges
Min. and max plinth height	98 - 168 mm
Adjustable feet	7cm, from 820 to 890 mm
Airborne acoustical noise emissions dBA	46 dBA
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1146 mm
Top cover	Metallic sheet
Energy Star	Yes

Electrical Connection

Connected power	1100 W
Current	10 A
Voltage	115 V
Frequency (Hz)	60 Hz
Type of connection	Single-phase
Power supply cable length	140 "
Plug	(B) NEMA 5-15P

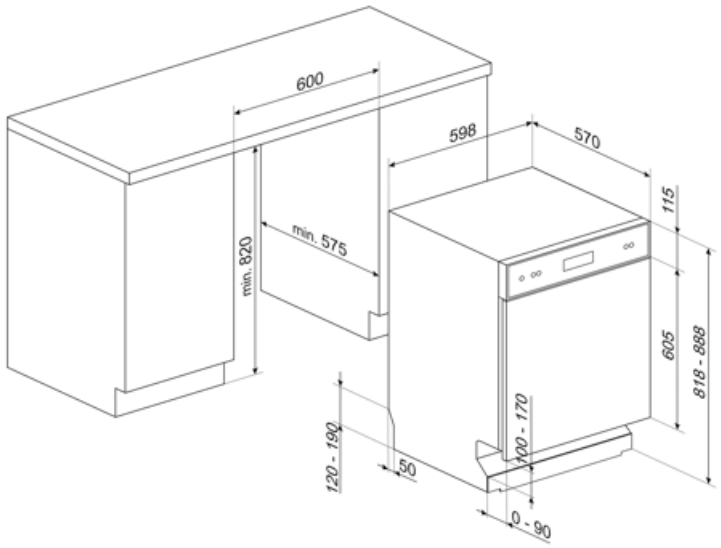

Compatible Accessories

KITJBDW



KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



...



PRG_RINSE_72dpi



15 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.