

DW8210X



Product Family	Dishwashers
Commercial height	ADA Compliant
Installation	Under counter built-in
N° baskets	3, Flexi
Motor	Inverter
EAN code	8017709354749



Programs



N. of programmes	5	Normal	Yes
Washing temperatures	45, 50, 65, 70 °F	Rinse	Yes
Auto sensor 45-65	Yes	Pots & Pans	Yes
Express 60°	Yes		

Options




Dry Assist+ option	Yes	Intensive wash zone option	
Professional option			

Baskets



Basket components colour	Grey	Lower Basket	With fixed racks
Upper Basket	With central fixed racks	Lower basket with anti-drip inserts	Yes
Height adjustment of the upper basket	On three levels (5 cm)	Colour Inner Components	Sage Leaf
Largest loadable dish in upper basket	25,0 inches	Cutlery basket	Yes

Technical Features




Width (mm)	23 9/16 "
Depth (mm)	22 7/16 "
Product Height (mm)	32 3/16 "
Programme graphics	Written in EN
On/off indicator	Yes
Rinse aid indicator	Light
End of cycle indicator	Led on display, with acoustic signal
Auto switch-off	Yes
Washing system	Orbital
Third spray arm	Single
Turbidity sensor	Yes
Aquatest	
Flood protection system	Single Acquastop
Max water hardness	100°fH;58°dH

Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Tube material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with variable hinges
Min. and max plinth height	98 - 168 mm
Adjustable feet	7cm, from 820 to 890 mm
Airborne acoustical noise emissions dBA	46 dBA
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1146 mm
Top cover	Metallic sheet
Energy Star	Yes

Electrical Connection

Connected power	1100 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	140 "
Voltage	115 V	Plug	(B) NEMA 5-15P
Frequency (Hz)	60 Hz		

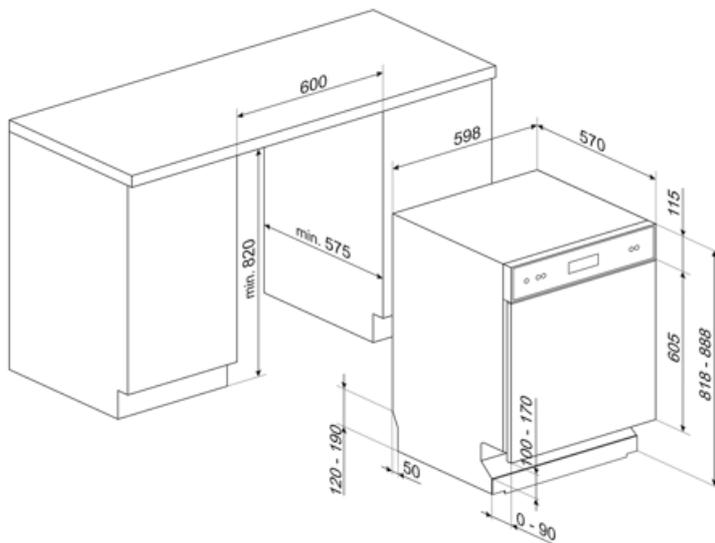

Compatible Accessories

KITJBDW



KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary

	<p>Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.</p>		<p>The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.</p>
	<p>To improve the drying of dishes without leaving stains.</p>		<p>The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.</p>
	<p>Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.</p>		<p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p>
	<p>Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.</p>		<p>Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.</p>
	<p>...</p>		<p>PRG_RINSE_72dpi</p>
	<p>15 place settings: Number of place settings.</p>		<p>System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.</p>