


DW8210X


Product Family

Commercial height	Dishwashers
82 cm	
Installation	Under counter built-in
Nº baskets	3, Flexi
Motor	Inverter
EAN code	8017709354749



Programs



N. of programmes	5	Normal	Yes
Washing temperatures	45, 50, 65, 70 °F	Rinse	Yes
Auto sensor 45-65	Yes	Pots & Pans	Yes
Express 60°	Yes		

Options



Dry Assist+ option	Yes
Professional option	

Intensive wash zone option

Baskets



Basket components colour	Grey	Lower Basket	With fixed racks
Upper Basket	With central fixed racks	Lower basket with anti-drip inserts	Yes
Height adjustment of the upper basket	On three levels (5 cm)	Colour Inner Components	Sage Leaf
Largest loadable dish in upper basket	25,0 inches	Cutlery basket	Yes


Technical Features



Width (mm)	23 9/16 "	Max water hardness	100°fH;58°dH
Depth (mm)	22 7/16 "	Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Product Height (mm)	32 3/16 "		
Programme graphics	Written in EN		
On/off indicator	Yes	Tub material	Stainless steel
Rinse aid indicator	Light	Filter	Stainless steel
End of cycle indicator	Led on display, with acoustic signal	Concealed heating element	Yes
Auto switch-off	Yes	Hinges	Self balancing with variable hinges
Washing system	Orbital		98 - 168 mm
Third spray arm	Single	Min. and max plinth height	
Turbidity sensor	Yes	Adjustable feet	7cm, from 820 to 890 mm
Aquatest		Additional gaskets	Yes
Flood protection system	Single Aquastop	Back cover	Yes
		Depth of dishwasher with open door (mm)	1146 mm
		Top cover	Metallic sheet

Electrical Connection

Connected power	1100 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	140 "
Voltage	115 V		
Frequency (Hz)	60 Hz	Plug	(B) NEMA 5-15P

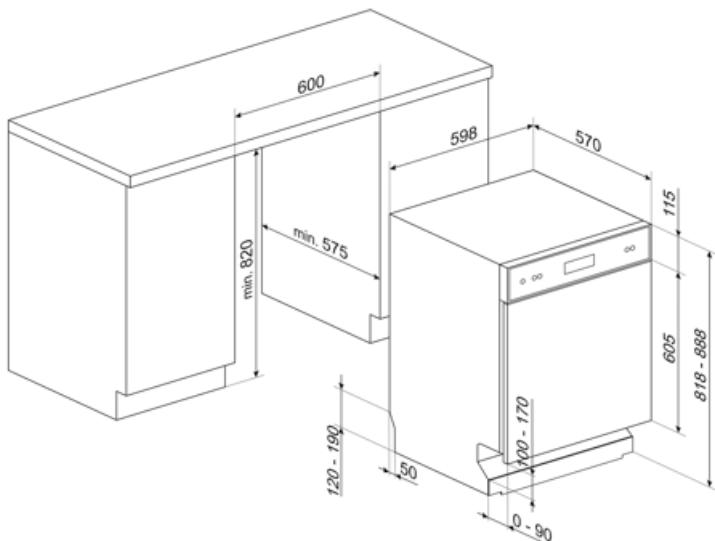

Compatible Accessories

KITJBDW



KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



...



PRG_RINSE_72dpi



15 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.