

DW8210X





Product Family Dishwashers
Commercial height 82 cm

Installation Under counter built-in

Yes

N° baskets 3, Flexi Motor Inverter

EAN code 8017709354749



Programs







N. of programmes5NormalYesWashing temperatures45, 50, 65, 70 °FRinseYesAuto sensor 45-65YesPots & PansYes

Options

Express 60°



Dry Assist+ option Yes Intensive wash zone Professional option option

Baskets



Basket components Grey Lower Basket With fixed racks

colour Lower basket with anti- Yes
Upper Basket With central fixed racks drip inserts

Height adjustment of On three levels (5 cm) Colour Inner Sage Leaf

the upper basket Components

Largest loadable dish in 25,0 inches Cutlery basket Yes upper basket

Technical Features









Width (mm) 23 9/16 "
Depth (mm) 22 7/16 "
Product Height (mm) 32 3/16 "
Programme graphics Written in EN

On/off indicator Yes Rinse aid indicator Light

End of cycle indicator Led on display, with acoustic signal

Washing system Orbital
Third spray arm Single
Turbidity sensor Yes

Aquatest

Flood protection system Single Acquastop
Max water hardness 100°fH;58°dH

Drying systemNatural condenser drying,
with Dry Assist + automatic

door opening system at the

end of the cycle Stainless steel Stainless steel

Concealed heating Yes

element

Filter

Tub material

Hinges Self balancing with variable

hinges 98 - 168 mm

Min. and max plinth

height

Adjustable feet 7cm, from 820 to 890 mm


Additional gaskets Yes
Back cover Yes
Depth of dishwasher 1146 mm

with open door (mm)

Top cover Metallic sheet

Electrical Connection

Connected power1100 WType of connectionSingle-phaseCurrent10 APower supply cable
length140 "Voltage115 VlengthFrequency (Hz)60 HzPlug(B) NEMA 5-15P

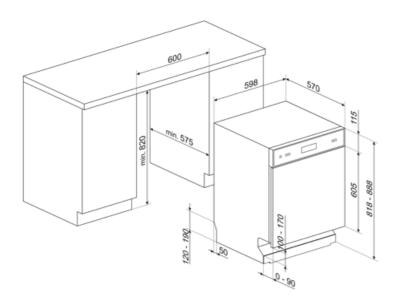



Compatible Accessories

KITJBDW





KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



PRG_RINSE_72dpi



15 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.





The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.