

DW8210X





Product family Dishwashers
Commercial height 82 cm

Installation Under counter built-in

N° baskets 3, Flexi Engine Inverter

EAN code 8017709354749



Programs







Number of programs5NormalYesWashing temperatures45, 50, 65, 70 °FRinseYesAutomaticYesPots & PansYesExpress 60°Sì

Options



Dry Assist+ option Yes Intensive washing zone Professional option option

Baskets

upper basket



Basket components Gray Lower basket Fixed racks finish Lower basket with anti-

finish Lower basket with anti- Yes Upper basket Central fixed racks drip inserts

Upper basket height On 3 levels Colour Inner Sage Leaf

adjustment Components
Largest loadable dish in 25,0 inches Cutlery basket Yes

Technical Features









Width 23 9/16 "
Depth 22 7/16 "
Height 32 3/16 "

Program symbols Writings in English

On/off indicator Yes Rinse aid indicator Light

End-of-cycle indicator Light on display, with

acoustic signal

Washing system Orbital
Third spray arm Single
Turbidity sensor Yes

Aquatest

Flood protection system Single Aquastop

Max water hardness 100°fH;58°dH

Drying systemNatural condenser drying,
with Dry Assist + automatic

Yes

3.9" - 6.6"

door opening system at the

end of the cycle Stainless steel

Filter Stainless steel

Concealed heating element

Hinges

Tub material

linges Self-balancing with variable hinges

Min. and max plinth

height

Adjustable feet 2 3/4", from 32 1/4" to 35"

Additional gaskets Yes
Back cover Yes
Depth of dishwasher 1146 mm

with open door (mm)

Top cover Metal sheet

Electrical Connection

Connected power 1100 W
Current 10 A
Voltage 115 V
Frequency (Hz) 60 Hz

Connection type Power supply cable length


Dlug

Plug

Single-phase

140 "

(B) NEMA 5-15P

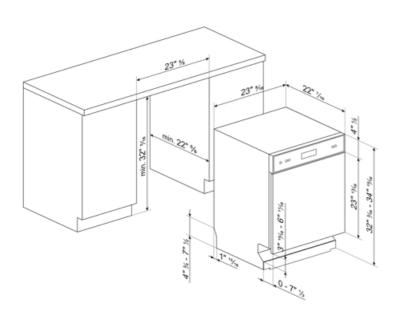



Compatible Accessories

KITJBDW





KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



COMM_HEIGHT_82_72dpi



Inverter technology: The evolution of Smeg's driers towards more intelligent and environmentally sustainable models has led to the choice of using Inverter technology with heat pumps, which reduces significantly energy consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



PRG_RINSE_72dpi



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



...



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c