

# DW8600

86  
cm

<b>Product Family</b>	Dishwashers
<b>Commercial height</b>	86 cm
<b>Installation</b>	Fully-integrated built-in
<b>Kitchen panel</b>	Not supplied
<b>Nº baskets</b>	2
<b>EAN code</b>	8017709355234
<b>UPC Code</b>	812895027228



## Programs



<b>N. of programmes</b>	8	<b>Super</b>	Yes
<b>Washing temperatures</b>	45, 50, 55, 65 °F	<b>Regular</b>	Yes
<b>Light soiling</b>	Yes	<b>Intensive 65°</b>	Yes
<b>Delicate</b>	Yes	<b>Intensive 70°</b>	
<b>Extreme Wash</b>	Yes	<b>Rinse</b>	Yes
<b>Auto</b>	Yes		

## Options



<b>Hi-Temp</b>	Yes	<b>Delay timer option</b>	Up to 24 hours
<b>Extra Fast</b>	Yes	<b>Extra dry option</b>	Yes
<b>Sanitize</b>	Yes	<b>1/2 load FlexiZone option</b>	Yes
<b>Silent</b>	Yes	<b>Sanitizing option</b>	Yes
		<b>Hyclean</b>	

## Baskets

<b>Basket colour</b>	Grey	<b>Height adjustment of the upper basket</b>	On two levels (5cm)
<b>Basket components colour</b>	Grey	<b>Lower Basket</b>	With 2 foldable racks
<b>Handle</b>	In plastic on upper and lower basket	<b>Colour Inner Components</b>	Grey
<b>Upper Basket</b>	With 2 foldable racks	<b>Cutlery basket</b>	Yes


## Technical Features



Width (mm)	23 9/16 "	Washing system	Standard
Depth (mm)	23 13/16 "	Turbidity sensor	Yes
Display type	LED display (3 digit)	Aquatest	
Product Height (mm)	33 7/8 "	Drying system	Natural condenser drying
Controls	Electronic	Tub material	Stainless steel
Display	Delayed start, Programme time indicator	Filter	Stainless steel
Programme graphics	Written in EN	Concealed heating element	Yes
On/off indicator	Yes	Can be installed in-column	Yes
Rinse aid indicator	Light	Adjustable feet	5cm, from 820 to 870 mm
End of cycle indicator	On display, with acoustic signal	Back feet adjustable from front	Yes
		Adjustable plinth	By height

## Electrical Connection

Connected power	1400 W	Type of connection	Single-phase
Current	12 A	Power supply cable length	116 "
Voltage	120 V	Plug	Junction Box
Frequency (Hz)	60 Hz		

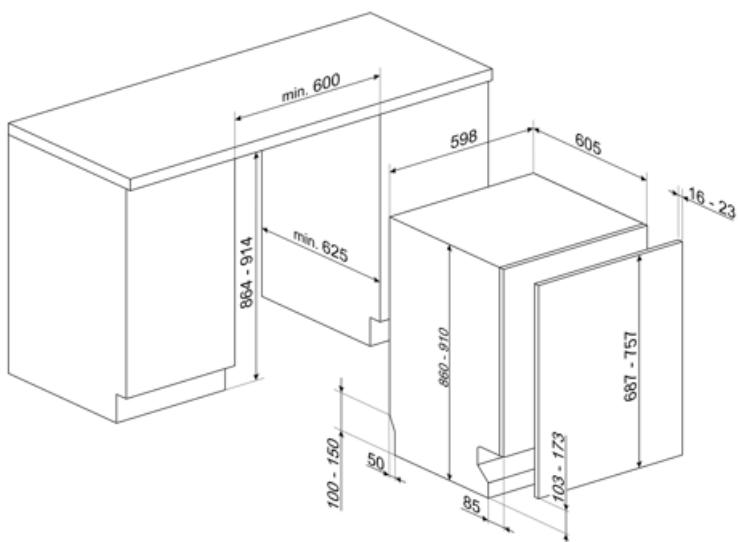



---

## Compatible Accessories

---



**KIT86VX**

stainless steel panel with Victoria handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel

## Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



86 cm high



FlexiZone: The  $\frac{1}{2}$  load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



PRG\_RINSE\_72dpi



15 place settings: Number of place settings.



The Regular programme is for dishes with regular dirt, even with dried-on residues.



Installation in column: Installation in column



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Hyclean: When the HYCLEAN option is selected, the dishwasher performs a final 10 minute rinse at a high temperature of 70°C, eliminating virtually all bacteria to achieve the highest possible standards of cleanliness. The Hyclean option can be selected with almost all cycles at temperatures above 50°C.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



PRG\_STRONG\_72dpi



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



LIGHT SOILING Washing programme with low water and energy consumption.